



HÒ

# **English Edition**



HO



one stop shopping for laboratories



-Ín

glasswares ✓ consumables ✓ equipments ✓ instruments ✓ chemicals ✓

2023 - 2025





Dear customer,

We are proud to present our new, colourful and cheerful cataloque to your taste.

Main "highlights" of our new catalogue are;

We added hundreds of new products that were carefully selected to ease your daily work.

easy and fast access to products.





New designed product and catalogue number indexes offer





We are now offering a wide range of chemicals and reagents with a perfect price & quality correlation.

Products are categorised with different section colors according

to their areas of utilization.





# highlights our goals, mission and vision .



For us, the only important factor is quality. Our product quality, service quality, manforce quality, and management quality will never change.



Our compass always directs us to perfection. German sensibility and perfectionism are two main components of our entire business life.



We deny the word "impossible". We have no place in our vocabulary such as "impossible". In contrast, we have opportunity, solution, flexibility.



We consider our customers as the sole judge in this game that we have been playing with enthusiasm. Customer satisfaction is our only criteria.



We always wanted the word "trust" to gleam next to our name. And it is actually what happened. Our belief is that everything starts with trust.



It is our sincere belief that we were all born from the same mother. We are always respectful to the enviroment and the world we live in.



Everyday we embrace new ideas. Each morning we spend the first hours for implementing new ideas to our business.



We differentiate ourselves from the ordinary. We always try to create new ideas and strategies for being a pioneer in our field of activity.



For many years now, we have been working for science extending beyond boundaries. We have been succesfully exporting to 110 countries in the world.



# highlights plastic injection production \_



ISOLAB is also a well known plastic labware manufacturer. Latest technologies approved production techniques and high capacity machinery park are held to serve the best **sterile** and **non sterile** products.

ISOLAB plastic production consists of experienced staff, high capacity injection moulding technology and premium grade raw material.

Most of the SOLAB plastic products are certified with CE - Invitro Diagnostic Directive, council directive 98/79/ EC, concerning in vitro diagnostic instruments.

Raw materials are carefully chosen according to their **MFI** (melt flow index) value, **OIT** (oxidative induction time) value, density and humidity.

# - highlights plastic sterile production



Solution plants are well equipped clean rooms with **HEPA filters** and positive pressure areas which are supplied with air locked doors.

Clean rooms are validated according to international **DIN** and **ISO** standards. In order to avoid any contamination through human contact, the entire process is automated.

Raw material is automatically fed from silos to moulding machines, through vacuum loaders.

Clean room staff is equipped with appropriate, protective clothes, in order to diminish the contamination risks.

- highlights plastic blowing production



Thanks to the latest technology, **ISOLAB** became one of the best Plastic Blowing Producer in labware industry.

Fully automated blowing machines, European made moulds and auxiliary, Premium grade raw material and experienced staff, provide a stable and seamless labwares, such as; bottles, pipettes etc.

ISOLAB is using very sensitive control units, such as patented parison controls from 300 different points.

This helps to control the wall thickness in all sections of a product and resulting a continuous quality level.

# highlights quality control & certification.

Testing protocols used in ISO LAB Quality Assurance
material specs & pressure test
Tables are manufactured from vigit Polyproperture capta are manufactured from vigits high density Polyproperture in the manufacture of the Vigit of
Endotoxin (Pyrogen)&RNase/DNase testing
Products have been tosted and have met the orthole asstabilished in ANSI/AMU ST 22020/R 2010bachelis Erdotalen – Terd methodogies, ruchive leading and attemative to batch testing with results leas than 0,1 EU/mi. Products in this pack have also been tested and are free of any detectable NMsse/DNsse contamination. This production let has been sampled and tested in accordance with standard operating procedures and has been released by quality assurance for the fallowing characteristics
Product sterilization
Manufactured at a class 10.000 sterile room under germ-Inee aseptic conditions and then re-steriled by gamma radiation. This product ick has been gamma irradiated (in a dosage level range between 12-25 Koy) and dostrefrictiony released base on the sterilization of healthcare requirements with sterility assurance level of SAL 10 -5.
Endotoxin (Pyrogen) detection
Samples are extracted in endotoxin-free water and tested for endotoxins using the kinetic turbidimetric method of the Limatus Arnobecoyle Lystat (LAL) test according to the USP standard with minimum detection level 0,05 EU/mi.
Nuclease detection
Samples are flushed in 20ul vessel containing (µ of 7.5 kb Poly(A) tabled FMA with a buffer containing NaCl and MgCi2: Reaction later been incubated (1 hour / 37 °C) then visualized in an agence gal. The flush insula are then compand to negative and positive controls. The resulting reaction must not alrow any level of degradation of the DNA and RFA flagments.
DNA contamination
Samples are extracted with etering, DNA-free weak:r. A portion of estanch it ackled to a PCPF reactor containing thermoadres polymensis, a polymen set to analysi memmalan pers, and ell'TPA. Negative control reactions and possible control reactions (contening to reactions) and the polymensistic set of the polymensistic polymensistic polymensistic for 40 cycles, date which the reactions indicates the product as these of DNA contenington.
Laborgeräte GmbH



The blotech industry needs certification for the plastics they use. The market trends indicate a need for **DNase**, **RNase** and pyrogen-free products.

ISOLAB certified plastic products are a result of an ongoing quality control process.

The process begins with the inspection of raw materials to monitoring the final product and ends with testing each lot after production for contaminants.



## product groups classified by colors

volumetric measurement & liquid handling (001 - 024)

laboratory consumables & labware (025 - 080)

distilation & filtration & separation & sample preparation (081 - 114)

cleaning & safety & protection & sterilization (115 - 136)

density & temperature & time & pH & weight measurement (137 - 154)

stirring & mixing & shaking & heating & cooling (155 - 164)

chromatography & spectroscopy (165 - 178)

*life sciences & microscopy & microbiology (179 - 210)* 

## how to use QR code



111

A' 20°C 500 m

Based on the principles of innovative approach we, as ISO LAB Family, are dedicated to giving you the best user experience and technical support when you need.

On our brand new product catalogue, we launched a very useful feature, which allows you to explore  $\mathbb{ISO}^{AB}$  World with a 360° view!

Now you can start to scan product QR codes on relevant product pages and take a 360° look at ISOLAB products, for a 360° scene of quality.



Scan barcodes on our catalogue by your smartphone easily in all platforms or just click in the digital catalogue.

Please scan barcodes in the catalogue by using QR code scanner on your smartphone.

Please kindly click in the link shown in your QR code scanner or click directly in your digital catalogue.

You can see the details of the products on youtube.



WATCH

CLICK

Please subscribe our youtube channel

Scan here for further details about ISOLAB







\_\_blank production .



State of the art automatic welding and attaching machines are used for connecting the glass parts to each other.

ISOLAB is one of the few manufacturers that produces its own blank products.

Glass tubes are blown by highly skilled blowers to ensure the uniform wall thickness, exact shape and dimensions according to DIN standards.


After rigorous controls, all blanks are sent to tunnel furnaces where the stress on the blanks is eliminated under controlled heating and cooling process.

This process ensures the optimum mechanical stability and inhibits the effect of temperature fluctuations.



Glass tubes are blown by highly skilled blowers to ensure the uniform wall thickness, exact dimensions according to DIN standards.

#### \_ joint production \_



All joints are manufactured by automatic forming machines for consistent quality and guaranteed uniformity. ISOLAB manufactures all joints with automatic machines with guaranteed uniformity.

During the grinding process, only diamond tools are used to ensure perfect results.

The taper of the joints are tested with precise taper angle control machine to ensure the taper quality.


This process ensures ending up with accurately tapered, smoothly finished, absolutely leak-proof and interchangeable ground joints.

The tightness also tested with vacuum test machines.



Grinding steps are performed by diamond reamers assuring best results with highest precision.

#### calibrated tubing production .



Glass tubings are slowly and gradually heated up to half-melting level. Then they are shrinked around steel rods with precise diameter.

Most of the burette manufacturers use ordinary tubings which are more tolerant in terms of wall thickness and inside diameter.

Solution burette tubings are manufactured by using vacuum technology to maintain inside diameter of the burette tubings uniform all over their length.

First tubings are slowly and gradually heated up to half-melting level.

Then they are shrinked around steel rods with precise diameter under vacuum condition for uniform wall thickness and diameter.



Burette tubings are manufactured by using vacuum technology to maintain diameter of the burette tubings uniform all over their length.

\_ printing process\_


ISOLAB uses the most advanced printing machines for achieving the highest printing quality.

These machines guarantee high contrast and sharp printing providing precise reading.

All used screen stencils are stretchable.

The stretchable screen stencils easily stretched to match the calibration marks so that the volume precision is maintained at all volume levels.

Specially formulated blue, white or amber colored enamels are used during printing process.



Only high contrasted and fine printing allows precise reading of scaled products such as cylinders, burettes, pipettes etc.

#### 

According to DIN standards the information listed hereunder is required to printed on the bodies of products.

- Brand name
- Nominal capacity
- Class degree
- > Calibration temperature
- Matching standards
- Possible error limits
- Batch numbers
- Production date
- > Warnings, etc


#### \_ annealing process.

Furnace process is the last step to reach a perfect product.


In order to achieve, stress-free products with highest level of printing quality precise controlled gradual heating and cooling is essential.

At [Source and annealing steps are carried with state-of-art temperature controlled tunnel furnaces.

For these reasons all **ISOLAB** glassware are stress-free, mechanically strong and ever lasting printed.



In order to achieve the best results, the fumace has a precise temperature control all-over the thermal heating zone.



Furnace is entirely controlled by electronic panel for guaranteed temperature control at all steps.

ISOLAB is perfectly aware that the products used in laboratory should be very clean and excellently packed.

All glassware are washed in industrial scale ultrasonic cleaning machines for removing all the dirt and left over particles.

Our staff responsible for the final quality control of the packaging is extremely qualified and well experienced.

High quality packing materials are used to ensure break-free delivery of the products.




Modem industrial scale ultrasonic cleaning machines guarantee perfect removal of all remaining dirt and particles.

. packing process



The final step of the packing is also the final step of quality control process.

\_\_calibration \_

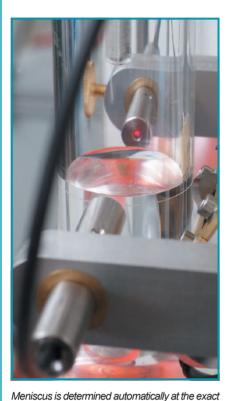

Manual calibration done by an operator carries high risk of mistakes and is not reliable.

All calibration steps are carried out with fully automatic robots.

These robotic machines guarantee the highest level of precision and accuracy.

Although during the calibration process the room temperature environment is kept stable at 20°C any slight change in the room temperature is automatically compensated by the machines.

Meniscus is automatically determined at the exact lowest level by a laser beam.

Application of the meniscus ring line is done by stretching the glass surface for longer persistance with the help of a diamond tool. Later the stretched ring line is stained with either blue or white enamel paint for easy observation of meniscus line.



Filling the blank products with water is done automatically by the calibration machines.

#### \_quality control \_

lowest level by a laser beam.



Steps such as filling the water, finding the meniscus line and controlling the volume are done automatically.

Manual quality control of volumetric products is also very complex and time consuming. Also, manual quality control done by an operator carries high risk of mistakes and is not reliable.


In order to avoid above mentioned risks and to achieve the best reliable results quality control steps are carried out with fully automatic robots which are only used by very few selected manufacturers.

Quality control robot is featured with a high resolution camera and image processing system for the most precise meniscus level control.

Steps such as filling the water, finding the meniscus line and controlling the volume are done automatically.

The balances and the electronic calibrated thermometers are in-line connected to the system for online data transfer.

The operator simply mounts the volumetric glass to the quality control robot and waits for the precision guaranteed outcome.

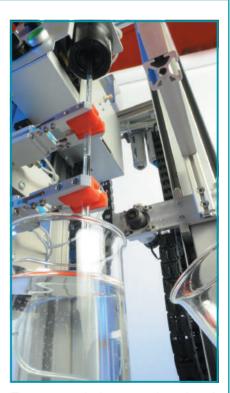

The operator simply mounts the volumetric glass to the quality control robot and waits for the precision guaranteed outcome.

/ Chargenzertifikat

**Batch Certificate** 

mai office policy respective Resident Tolemanics (1) resident Tolemanics (1) resident residence (1) resident residence (1) resid


#### conformity\_

"**Conformity**" is the compliance of the product with the exact and legal standards defined by German Federal Weights and Measures (Eichordnung) Regulation.

The "conformity testing and certification" is described in detail on **DIN 12600** standard.

According to German law of metrology, only listed accredited manufacturers such as  $\mathbb{ISO}^{AB}$  with a guaranteed quality assurance are allowed to certify the conformity by printing the conformity logo (**DE-M**) on self manufactured volumetric products.

The manufacturer's logo should also be printed along with the conformity logo. We are very proud of having this logo printed on our related products as a guarantee of conformity according to **DIN 12600** standard starting from day one.



## "**Batch certificate**" shows the determined mean value of the controlled standard deviation and tolerance of volumetric products batch to batch.

After the production of each batch, the mandatory minimum quantity is randomly tested and certified according to **DIN 12600** standard.

The **"batch certificate"** comprimises the date of production, mean value, standard deviation, permitted tolerance and other information.

By tracking the batch number user can reach the related batch certificate.

Batch numbers and related certificates can be downloaded from our **ISOLAB** web site. Users can print the **"batch certificate"** online with the following steps:

For downloading the certificate please enter www.isolab.de web site, and > select "downloads/support" from the menu > select the product code number from "obtain certificates" section > select the batch number printed on the body > certificate page comes automatically > print the page by selecting "printer version" on the left corner.

An "individual quality certificate" can also be issued for volumetric products.

"Quality certificate" shows the final and ultime tested factors of the volumetric products.

Such a certificate is always well accepted worldwide since it should be prepared by a worldwide accreditated test laboratory.

The selected product is individually tested in the most precise way and controlled as defined by German Federal Weights and Measures (Eichordnung) Regulation and according to **DIN 12600** standard.

Individually prepared and printed quality certificate compromising the date of production, mean value, standard deviation, permitted tolerance and other informations.

## quality certification

ISOLAB CALIBRATION SERVICES

ISOLAB (





Recall Batch is approprie

batch certification.



#### classification.

All volumetric products are always calibrated as to contain (In) or to deliver (Ex).

They are classified in three groups; **Class "B"** or **Class "A"** or **"AS"**.

**Class "A"** and **"AS"** carry exactly the same error and tolerance limits.

The difference is in their "delivery" and "waiting times". "S" means quick (swift) delivery.

The classification as **"A"** or **"B"** indicates the degree of accuracy of related parameters.

Class **"A"** or **"AS"** volumetric products carry highest level of accuracy and specially well accepted by laboratories looking for quality.

The error limits, accuracy and variations are always in accordance with relevant **ISO** or **DIN** standard limits.

#### delivery time .

Delivery time is the time needed to deliver the liquid from the starting level to the final level.

For burettes and pipettes final level is generally the tip of the product.

#### waiting time \_\_\_

The waiting time starts after complete transfer is finalised.

After the transfer of the liquid usually liquid continues to flow down from the burette or pipette wall.

For accurate volume measurement attention must be paid to the waiting time.

Specially with pipettes the residual drop accumulated at the tip should be considered.

#### meniscus line \_


A simple definition of meniscus is the curve on the surface of the liquid.

According to **DIN**, **ISO** and most other standards volume should be read at the lowest liquid level.

The lowest level of the meniscus has to touch the upper edge of the graduation mark.

On the volumetric glassware the form of the meniscus is concave.


For the exact and most precise results, the eye of the observer must be exactly at the same level of meniscus line. To have a better, faster and more accurate reading and measurement, a black strip should be held at the back side, just below of the graduation mark and meniscus line.



#### schellbach stripe \_


The schellbach stripe is a narrow blue band which takes place at the center of a wider white band on the burette tube background.

Mostly printed at the backside of the burette tube for easier observation of meniscus line.



The penetrated light fraction two arrow head points that appear at the meniscus line.

Exact meniscus line is exactly where two arrow heads touch each other.



## how to use volumetric flasks

> Volumetric flasks are mainly used for preparation of highly accurate solutions.

> First add the exact weight of the product inside the flask. Fill the flask about half the volume and mix the content.

> Then fill again until the level reaches a bit lower than calibration ring mark.

Adjust the temperature of flask and the content to 20°C.

> Add a little more liquid so that the meniscus will be exactly at the same level of the ring mark.

> Pay attention to read the meniscus at the eye level also not to wet the inner neck wall above the ring mark.

#### how to use burettes

Fill the burette a bit higher than the "0" level.

> To activate the stopcock, drain the solution but never below the "0" mark.

Pay attention there will be no air bubbles left in the burette.

Fill more solution above 10 mm of the "0" mark. Do not wet the burette wall above the liquid level.

> By focusing the meniscus at eye level drain the solution to the exact "0" mark.

Wipe off the drops at the stopcock tip and slowly start the titration. When color changes stop the titration and wait for the 30 seconds.

> Wipe off the remaining drop since this is also the part of the measured volume.



In 500

#### \_how to use measuring cylinders \_

> Cylinders are mainly used for the exact measurement of liquid volumes.

➤ First fill the cylinder with liquid and wait until the residual liquid on the wall will to filter down.

> Then read the volume level from the cylinders volume graduation chart.

> Pay attention to read the volume level at the eye level. Do not wet the inner neck wall above the calibration mark.



#### \_how to use pipettes \_\_\_

➤ Fill the liquid max 5 mm above the volume mark. Wipe off the outer surface of the pipette.

➤ Hold the pipette at eye level and place the tip to the wall of a beaker with a slight angle.

OLA RMAN

DIN

AS

Fx + 59

20°C

50

ml

0.050 ml

> Discharge the access volume until the meniscus reaches the calibration mark.

> When the level of the liquid reaches to the tip wait according to waiting time.

> When the waiting time is over, wipe the tip gently pulling upwards on the beaker wall and transfer the liquid.

If there is still any residual liquid left in the tip, never blow out.

# how to use mixing cylinders

Mixing cylinders are mainly used for the exact measurement of liquid volumes.

➤ First fill the cylinder with liquid and wait until the residual liquid on the wall to filter down.

> Then read the volume level from the cylinders volume graduation chart.

> Later add the precise weight of the substance and dissolve it by shaking the cylinder.



#### .how to use density bottles \_

Carefully weigh the empty and well dried density bottle.

▶ Fill the bottle up to 2/3 of the neck level while avoiding air bubbles.

➤ Adjust the bottle temperature to 20°C in a thermostatic bath. Insert the stopper of the bottle carefully. The capillary of the stopper will discharge the liquid.

> Dry the body of the bottle and the stopper carefully by wiping with a tissue paper. Pay attention not to remove any liquid from the capillary tube.

> The liquid inside of the bottle should exactly be at the same level with the upper end of the capillary tube.

Final step is weighing the filled density bottle and calculating the density.



200

VOLUMETRIC FLASKS - "glass" - "class A" "conformity certified"



Manufactured from heat resistant borosilicate 3.3 glass according to DIN EN ISO 1042 standard. Calibrated by automatic robots according to DIN/ISO Class "A" standard.

> Conformity mark ("DE-M") and batch number printed on the body surface. Batch certificate can be downloaded from website.

> Blue and white colored diamond grinded meniscus ring mark offers longer persistence. Inscriptions on the flask bodies are printed with long lasting enamel color.

Flasks are supplied with a leak-proof P.E stopper which ensures perfect closure.

clear flasks	amber flasks	volume	neck NS size	pack quantity
013.01.005	014.01.005	5 ml	NS 10/19	2 pieces
013.01.010	014.01.010	10 ml	NS 10/19	2 pieces
013.01.020	014.01.020	20 ml	NS 10/19	2 pieces
013.01.025	014.01.025	25 ml	NS 10/19	2 pieces
013.01.026	014.01.026	25 ml	NS 12/21	2 pieces
013.01.050	014.01.050	50 ml	NS 12/21	2 pieces
013.01.051	014.01.051	50 ml	NS 14/23	2 pieces
013.01.100	014.01.100	100 ml	NS 12/21	2 pieces
013.01.101	014.01.101	100 ml	NS 14/23	2 pieces
013.01.150		150 ml	NS 14/23	2 pieces
013.01.200	014.01.200	200 ml	NS 14/23	2 pieces
013.01.250	014.01.250	250 ml	NS 14/23	2 pieces
013.01.300		300 ml	NS 14/23	2 pieces
013.01.400		400 ml	NS 19/26	2 pieces
013.01.500	014.01.500	500 ml	NS 19/26	2 pieces
013.01.901	014.01.901	1000 ml	NS 24/29	2 pieces
013.01.902	014.01.902	2000 ml	NS 29/32	2 pieces
013.01.905		5000 ml	NS 34/35	1 piece
013.01.910		10000 ml	NS 45/40	1 piece

150 ml, 300 ml, 400 ml and 10000 ml volumetric flasks are in addition to DIN range.

VOLUMETRIC FLASKS - "glass" - "class A" "conformity certified" - "COATED"



> When handling dangerous and/or valuable solutions coated volumetric flasks are highly recommended.

> Bodies of these flasks are coated with a special formulated coating which reduces the impacts and also minimize the possible risks in case of breakage. Coating covers the body like a protective glove and holds the broken parts unscattered.

➤ The coating is highly transparent and can resist up to 135°C with maximum period of 30 minutes. Coated flasks should not be exposed directly to open flame.

> All other technical specifications are identical with standard body volumetric flasks.

coated clear flasks	coated amber flasks	volume	neck NS size	pack quantity
013.01.005C	014.01.005C	5 ml	10/19	2 pieces
013.01.010C	014.01.010C	10 ml	10/19	2 pieces
013.01.020C	014.01.020C	20 ml	10/19	2 pieces
013.01.025C	014.01.025C	25 ml	10/19	2 pieces
013.01.026C	014.01.026C	25 ml	12/21	2 pieces
013.01.050C	014.01.050C	50 ml	12/21	2 pieces
013.01.051C	014.01.051C	50 ml	14/23	2 pieces
013.01.100C	014.01.100C	100 ml	12/21	2 pieces
013.01.101C	014.01.101C	100 ml	14/23	2 pieces
013.01.150C		150 ml	14/23	2 pieces
013.01.200C	014.01.200C	200 ml	14/23	2 pieces
013.01.250C	014.01.250C	250 ml	14/23	2 pieces
013.01.300C		300 ml	14/23	2 pieces
013.01.400C		400 ml	19/26	2 pieces
013.01.500C	014.01.500C	500 ml	19/26	2 pieces
013.01.901C	014.01.901C	1000 ml	24/29	2 pieces
013.01.902C	014.01.902C	2000 ml	29/32	2 pieces

150 ml, 300 ml, 400 ml and 10000 ml volumetric flasks are in addition to DIN range.

Manufactured from heat resistant, borosilicate glass 3.3

> Trapezoidal body form offers much higher stability and

➤ Calibrated according to DIN/ISO Class "A" standard. Featured with a ("DE-M") conformity mark according to German Federal Weights and Measures Regulations.

Individual calibration carried out by automatic robots

Conformity mark and batch number printed on the body surface. Batch certificate can be downloaded from website.

> Diamond grinded meniscus ring mark offers longer persistance and enables easy observation of meniscus level.

eliminate possible deviations from nominal values.

according to DIN EN ISO 1042 standard.

avoids fall over risk.

013.13.050

013.15.050

#### VOLUMETRIC FLASKS - "glass" - "class A" - "conformity certified" - "trapezoidal"



Small size flasks with standard body shape can fall over very easily due to their smaller center of gravity.

Compared to other standard volumetric flasks of the same volume, trapezoidal flasks have at least twice base area.

For this reason trapezoidal flasks are much more stable than standard flasks.



pack quantity amber flasks clear flasks neck NS size volume 013.15.001 07/16 013.13.001 1 ml 2 pieces 013.13.002 013.15.002 07/16  $2 \, m$ 2 pieces 013.13.003 013.15.003 07/16 3 ml 2 pieces 013.13.004 013.15.004 4 ml 07/16 2 pieces 013.13.005 013 15 005  $5 \, m$ 07/16 2 pieces 013.13.010 013.15.010 10 ml 10/19 2 pieces 013.13.020 013.15.020 10/19 20 ml 2 pieces 013.13.025 013.15.025 10/19 2 pieces 25 ml

#### VOLUMETRIC FLASKS - "P.P" - "class B"

50 ml

12/21

2 pieces

Manufactured according to DIN EN ISO 1042 standard from clear polypropylene. Resistant to most acids, bases and many commonly used solvents.

Calibrated according to DIN/ISO Class "B" standard.

> Clear flasks are manufactured from very clear polypropylene resulting high transparency and clear indication of meniscus line.

> Amber flasks are manufactured from special formulated polypropylene preventing UV light penetration into the flask yet still offering high transparency.

> All volumetric flasks are supplied with a leak-proof P.E stopper which ensures perfect closure.


➤ For consistent accuracy should not be used with liquids over 60°C or kept under direct sunlight for long periods.

clear flasks	amber flasks	volume	neck NS size	pack quantity
014.03.025	014.13.025	25 ml	10/19	1 piece
014.03.050	014.13.050	50 ml	12/21	1 piece
014.03.100	014.13.100	100 ml	14/23	1 piece
014.03.250	014.13.250	250 ml	14/23	1 piece
014.03.500	014.13.500	500 ml	19/26	1 piece
014.03.901	014.13.901	1000 ml	24/29	1 piece



Inscriptions on the flask bodies are printed with long lasting enamel color.
All volumetric flasks are supplied with a leak-proof P.E stopper which ensures perfect closure.

#### CYLINDERS - "glass" - "class A" - "conformity certified"

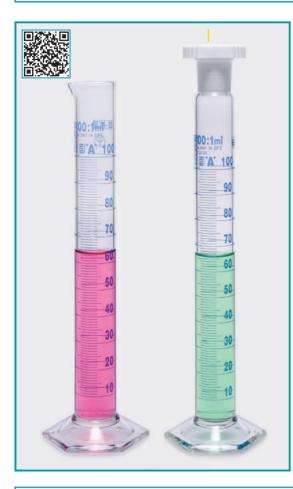

Manufactured from heat resistant borosilicate 3.3 glass according to DIN EN ISO 4788 standard. Calibrated by automatic robots according to DIN/ISO Class "A" standard.

Conformity mark ("DE-M") and batch number printed on the body surface. Batch certificate can be downloaded from website.

> Inscriptions on the flask bodies are printed with long lasting enamel color.

> Flawless spout design assures pouring without any drips.

 Hexagonal base with strengthened knobs ensures increased stability.

 Mixing cylinders are supplied with a P.E stopper.

measuring cylinders	mixing cylinders	volume	pack quantity
015.01.005		5 ml	2 pieces
015.01.010	016.01.010	10 ml	2 pieces
015.01.025	016.01.025	25 ml	2 pieces
015.01.050	016.01.050	50 ml	2 pieces
015.01.100	016.01.100	100 ml	2 pieces
015.01.250	016.01.250	250 ml	2 pieces
015.01.500	016.01.500	500 ml	2 pieces
015.01.901		1000 ml	2 pieces
	016.01.901	1000 ml	1 piece
015.01.902		2000 ml	1 piece



**CYLINDERS** 

"class B" - "P.P base"

## CYLINDERS - "polypropylene" - "class B"

 Manufactured according to DIN/ISO Class "B" standard from polypropylene.

> Featured with excellent transparency, high chemical and remarkable heat resistance.

 Calibrated according to DIN/ISO Class "B" standard.

> Flawless spout design assures pouring without drips.

> Thick hexagonal base with strengthened knobs ensures increased stability.

➤ For consistent accuracy, should not be used with liquids over 60°C or kept under direct sunlight for long periods.

 Inscriptions and nominal values are either in embossed scale or in printed blue scale.

embossed scale	printed scale	volume	pack quantity
016.05.010	016.06.010	10 ml	1 piece
016.05.025	016.06.025	25 ml	1 piece
016.05.050	016.06.050	50 ml	1 piece
016.05.100	016.06.100	100 ml	1 piece
016.05.250	016.06.250	250 ml	1 piece
016.05.500	016.06.500	500 ml	1 piece
016.05.901	016.06.901	1000 ml	1 piece

Manufactured from heat resistant, durable borosilicate glass according to DIN/ISO Class "B" standard.

> These cylinders are supplied with an interchangeable polypropylene base.


Thick and durable polypropylene base reduces the risk of breakage during use and cleaning.

 Base perfectly fits the cylinder body and can easily be dismantled.

 Flawless spout design assures pouring without any drips.

> Inscriptions on the cylinder body are printed with white enamel.

volume	pack quantity
10 ml	2 pieces
25 ml	2 pieces
50 ml	2 pieces
100 ml	2 pieces
250 ml	2 pieces
500 ml	2 pieces
1000 ml	2 pieces
	10 ml 25 ml 50 ml 100 ml 250 ml 500 ml

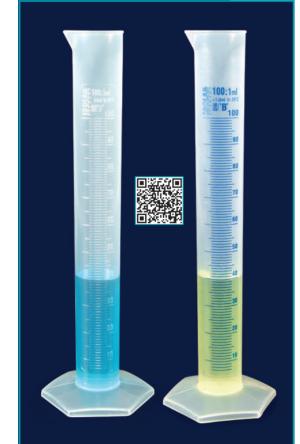

#### BURETTES - "straight" - "class AS" - "conformity certified"




Manufactured from pre-vacuum calibrated borosilicate 3.3 tubing according to ISO 385 standard. Calibrated according to DIN/ISO Class "AS" standard.

> Conformity mark ("DE-M") and batch number printed on the body surface. Batch certificate can be downloaded from website.

> Supplied with an interchangeable PTFE stopcock with identical keys with does not need "matching the pairs" during cleaning.

Inscriptions and nominal values are printed with long lasting enamel color.

Schellbach stripe featured with a narrow blue band which is at the center of the larger white band offers easier and accurate observation of the meniscus line.



The schellbach stripe has a narrow blue band which is at the center of the larger white band.

The light fraction creates two arrow head points which appear at the meniscus line level.

Meniscus reading point is exactly where these two arrow heads meet each other.

clear burettes W/O schellbach	clear burettes with schellbach	amber burettes W/O schellbach	volume	pack quantity
017.02.010	017.01.010	018.01.010	10 ml	1 piece
017.02.025	017.01.025	018.01.025	25 ml	1 piece
017.02.050	017.01.050	018.01.050	50 ml	1 piece

#### AUTOMATIC BURETTES - "class AS" - "conformity certified"



Manufactured from pre-vacuum calibrated borosilicate 3.3 tubing according to ISO 385 standard. Calibrated according to DIN/ISO Class "AS" standard.

> Conformity mark ("DE-M") and batch number printed on the body surface. Batch certificate can be downloaded from website.

> Featured with an intermediate PTFE stopcock and with a PTFE "needle" valve stopcocks.

> Clear burettes are featured with a schellbach stripe for easier and accurate observation of the meniscus line.

Inscriptions and nominal values are printed with long lasting enamel color.


> Automatic burettes are supplied without bottles and bellow. Bottles and bellows should be ordered separately.



All automatic burettes are featured with an intermediate PTFE stopcock for reliable, fast and accurate measurement.

clear burettes	amber burettes	volume	pack quantity
019.01.010	019.05.010	10 ml	1 piece
019.01.025	019.05.025	25 ml	1 piece
019.01.050	019.05.050	50 ml	1 piece

SCHILLING BURETTES - "class AS"

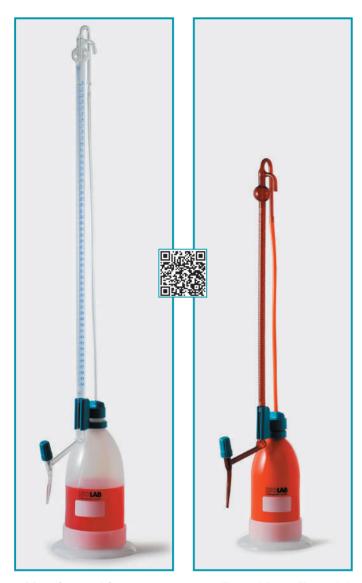

Manufactured from pre-vacuum calibrated borosilicate 3.3 tubing according to ISO 385 standard. Calibrated according to DIN/ISO Class "AS" standard.

Conformity mark ("DE-M") and batch number printed on the body surface. Batch certificate can be downloaded from website.

 Clear schilling burettes are featured with a schellbach stripe.

Supplied with a PTFE "needle" valve stopcock. Inscriptions and nominal values are printed with long lasting enamel color.

clear burettes	amber burettes	volume	pack quantity
020.03.010	020.05.010	10 ml	1 piece
020.03.025	020.05.025	25 ml	1 piece
020.03.050	020.05.050	50 ml	1 piece


#### features of Schilling burettes

Schilling burettes are described as an alternative automatic burette specially suitable for field analysis where there is always a risk of breakage.

Schilling burette set consists of a burette tubing similar to glass automatic burette and a polyethylene reservoir bottle with a stabilising stand.

Offers a rapid filling by squeezing the polyethylene reservoir bottle and fast titration through valve stopcock.

#### **ACCESORIES for BURETTES**

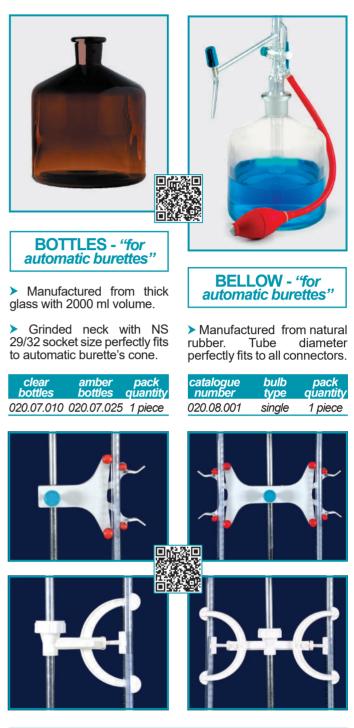

CLAMPS - "for straight burettes"


Manufactured to hold one or two straight burette at a time. They firmly hold the burettes on position and offer an easy observation of volume graduations and meniscus level.

> Clamps can be used on rods of diameter 10 mm to 12 mm.

> Fixing heads are featured with flexible springs that offers easy insertion and axtraction of the burettes.

catalogue number	clamp type	for holding	pack quantity
018.05.001	steel	1 burette	1 piece
018.05.002	steel	2 burettes	1 piece
018.06.001	polypropylene	1 burette	1 piece
018.06.002	polypropylene	2 burettes	1 piece

#### PIPETTES - "pasteur" - "polyethylene"

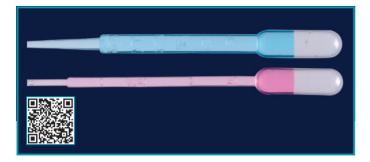

> Manufactured from low density polyethylene. Uniform wall thickness guarantees uniform suction force at all times and offers reproducible drop sizes for each use.


Ideal for transfering and dispensing liquids safely eliminating the risk of cross contamination.

Pipette bulb requires very small pressure force. Long and flexible stem can be bent to draw liquids from narrow vessels.

> Featured with embossed volume graduations on the body.

catalogue number	volume	product descriptions	packing specifications	pack quantity
084.02.001	3 ml	non-sterilized	in box	500 pieces
084.22.001	3 ml	gamma sterilizeo	l single pack	100 pieces
084.02.003	1 ml	non-sterilized	in box	500 pieces
084.22.003	1 ml	gamma sterilizeo	l single pack	100 pieces

#### PIPETTES - "serological" - "polystyrene"

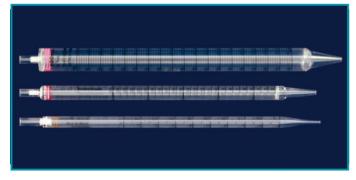

> Manufactured from virgin polystyrene with excellent optical transperancy. Sterilized with gamma irradiation. Free of RNase, DNAse, DNA and pyrogene.

Smooth interior prevents cell-hanging and clumping inside the pipette wall. Pipette tip offers constant reproducible flow.

> Optimised mouthpiece perfectly fits to all types of pipette pumps and balls.

Colour coded ring mark at suction stem allows fast identification and sourcing.

> The sharp, black, highly visible permanent graduations guarantee precise reading.

catalogue number	pipette volume	color code	box quantity
083.13.001	1 ml	yellow	500 pieces
083.13.002	2 ml	green	500 pieces
083.13.005	5 ml	blue	200 pieces
083.13.010	10 ml	orange	200 pieces
083.13.025	25 ml	red	150 pieces
083.13.050	50 ml	purple	100 pieces
083.13.100	100 ml	pink	50 pieces

#### DISPENSER BOX - "large"

> Manufactured from crystal clear acrylic with excellent field of vision.

Ideal for storing and dispensing relatively large scale products such as pasteur pipettes.

 Featured with non-skid silicone feet for stable stand.

> Featured with an easy opening hinged lid. Once opened, the lid stands open for easy dispensing.

► Box offers safe and clean storage of pipettes without been effected from enviromental effects.

Box external dimensions: 175x250x600 mm.



catalogue pack number quantity 084.05.001 1 piece



#### PIPETTES - "pasteur" - "glass"



> Manufactured from neutral glass according to ISO 7712 standard.

> Thick walls provide extra strength eliminating the risk of breakage.

Ideal for transfering and dispensing liquids safely eliminating the risk of cross contamination.

► Featured with a long drown capillary tip. The design of the suction part allows cotton plugging.

catalogue number	length	pack quantity	box quantity
084.01.001	150 mm	250 pieces	4 packs
084.01.002	230 mm	250 pieces	4 packs


#### BULB - "for glass pasteur pipettes"



Manufactured from natural rubber particularly to be used with glass pasteur pipettes.

catalogue	pack
number	quantity
084.03.001	100 pieces

#### PIPETTES - "glass" - "class AS" - "conformity certified"

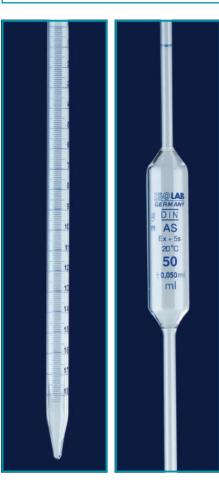

Manufactured from neutral tubing according to ISO 648 and DIN 12687 (for volumetric pipettes),ISO 835 and DIN 12699 (for graduated pipettes ) standards.

 Calibrated according to DIN/ISO Class "AS" standard.

Conformity mark ("DE-M") and batch number printed on the body surface. Batch certificate can be downloaded from website.

> Carefully formed and bevelled tips ensure proper flow rate. Color coded ring marks allows fast sourcing.


Inscriptions and nominal values are printed with long lasting enamel color.

graduated pipettes	volumetric pipettes	volume	pack quantity
021.01.001	021.05.001	1 ml	10 pieces
021.01.002	021.05.002	2 ml	10 pieces
	021.05.003	3 ml	10 pieces
	021.05.004	4 ml	10 pieces
021.01.005	021.05.005	5 ml	10 pieces
021.01.010	021.05.010	10 ml	10 pieces
	021.05.011	11 ml	10 pieces
	021.05.015	15 ml	10 pieces
021.01.020	021.05.020	20 ml	10 pieces
021.01.025	021.05.025	25 ml	10 pieces
021.01.050	021.05.050	50 ml	10 pieces

#### PIPETTES - "glass" - "class A"

ERMAN DIN

A Ex + 5s 20°C 50 0,050 ml



 Calibrated according to DIN/ISO Class "A" standard.

Carefully formed and bevelled tips ensure proper flow rate. Color coded ring marks allows fast sourcing.

 Inscriptions and nominal values are printed with long lasting amber stain.

volumetric pipettes	volume	pack quantity
021.15.001	1 ml	10 pieces
021.15.002	2 ml	10 pieces
021.15.005	5 ml	10 pieces
021.15.010	10 ml	10 pieces
021.15.015	15 ml	10 pieces
021.15.020	20 ml	10 pieces
021.15.025	25 ml	10 pieces
	50 ml	10 pieces
	<i>pipettes</i> 021.15.001 021.15.002 021.15.005 021.15.010 021.15.015 021.15.020	pipettes         volume           021.15.001         1 ml           021.15.002         2 ml           021.15.005         5 ml           021.15.010         10 ml           021.15.015         15 ml           021.15.025         20 ml           021.15.020         20 ml           021.15.025         25 ml



#### STAND - "for pipettes" "carrousel"



 Manufactured from polypropylene for holding up to 94 pipettes vertically.


The round carrousel stand can rotate 360° around stand axis enabling easy reach to each pipette.

> The grid patterned upper disc which is concentric with the carrier plate keeps the pipettes in vertical and correct position.

> The carrier plate consists of four concentric troughs with tapered sides and open bottoms which cradle the pipette tips protectively.

Drained liquid is collected by a stationary rack at the bottom part.

catalogue	height x	pack
number	diameter	quantity
022.01.001	48 x 23 cm	1 piece



The grid patterned upper disc which is concentric with the carrier plate keeps the pipettes in vertical and correct position.



The carrier plate consists of four concentric troughs with tapered sides and open bottoms which cradle the pipette tips protectively.

014

#### STAND - "linear"



> Manufactured from polypropylene for holding up to 12 pipettes horizontally. Easily dismantable for storage and cleaning purposes.

catalogue	pack	
number	quantity	
022.02.001	1 piece	

BOX - "for pipettes"



Manufactured from AISI 304 stainless steel with rectangular form. The total box height is not adjustable.

> Supplied with a silicone pad that fits to the box base.

 Silicone pad acts as a shock absorber and prevents the risk of breakage.

catalogue number	box base dimensions	box height	pack quantity
022.04.001	70x70 mm	210 mm	1 piece
022.04.002	70x70 mm	430 mm	1 piece



TRAY - "for pipettes"

> Manufactured from polystyrene for easy organisation of all kind of pipettes.

► Crenated design enables holding of large size pipettes in longitudinal direction and short size pipettes in transverse direction.

catalogue pack number dimensions quantity 022.03.001 285 x 215 x 40 mm 1 piece



Manufactured from aluminium with

cylindrical body form. For to carry

pipettes with different height during autoclave sterilisation process. The

Supplied with a silicone pad that fits to the box base. Silicone pad acts as a

shock absorber and prevents the risk of

 022.03.002
 60 mm
 145-235 mm
 1 piece

 022.03.003
 60 mm
 280-420 mm
 1 piece

min. & max. pack box height quantity

total box height is adjustable.

box diameter

breakage.

catalogue number

adjustable height



TRAY - "for pipettes"

 Manufactured from polystyrene for easy organisation of all kind of pipettes.

> 1-2-5 and 10 ml pipettes can be stored at 4 different compartments. Can also be used in drawers as well as on bench tops.

catalogue number	dimensions	pack quantity
022.03.011	300 x 425 x 30 mm	1 piece

#### RACK - "for pipettes"



 Manufactured from acrylic for easy organisation of all kinds of pipettes.

► 4 shelves guarantee easy and fast reach of all pipettes between 1 ml to 50 ml size with in arm's reach.

> Angled design of the pipette shelves prevents the risk of pipettes falling out even the shelf is fully filled.

 Featured with magnetic clamps on both sides for arrangement of multiple box assembly.

catalogue number	dimensions	pack quantity
022.06.001	290x90x400 mm	1 piece



#### PIPETTE FILLERS - "pi-pump"



A simple yet practicle pipette filler for all pipettes from 2 ml to 25 ml volume range.

> Even very small volumes can be dispensed precisely.

Pipette stem smoothly fits to the flexible silicone chuck and are firmly hold in position.

Rotating the existing handwheel on the body upwards draws the liquid precisely to the desired level.

Rotating the handwheel downwards let the liquid in the pipette discharge partially.

> A slight pressure applied to the fast release lever let the liquid flow-out for complete delivery.



 number
 vólúme
 quantity

 011.01.002
 up to 2 ml
 1 piece

 011.01.010
 up to 10 ml
 1 piece

 011.01.025
 up to 25 ml
 1 piece

#### PIPETTE FILLER - "macro"

> Bulb maufactured from natural rubber. Most common pipette filler for all types of pipettes up to 100 ml volume. Standard model can be used up to 10 ml pipettes. Universal model can be used up to 100 ml pipettes.

> Evacuation can be easily done by pressing the related automatic valves. Offers an easy single hand use. Pressing the valve the liquid is drawn- up to the desired level, dispensed partially or blown-out.

catalogue number	model	for pipettes	pack quantity
011.02.001	standard	up to 10 ml	1 piece
011.02.002	universal	up to 100 ml	1 piece

#### PIPETTE FILLER

 Simple and easily controllable pipette filler for all pipettes up to 15 ml volume.

> Very easy to use; First squeeze the bulb and release the air inside. Then attach the pipette. Release the bulb pressure and fill the pipette. For discharge squeeze the bulb again.

catalogue	nack
catalogue number	pack quantity
011.04.001	1 piece



catalogue number	for pipette volume	pack quantity
011.04.003	max 3 ml	10 pieces
011.04.005	max 5 ml	10 pieces
011.04.010	max 10 ml	10 pieces

#### PIPETTE FILLERS - "maxi"

 Advance pipette filler for all pipettes from 1 ml to 100 ml volume range.

> The optimised valve system allows easy draw of liquid without excess pressure.

Pipette stem smoothly fits to the flexible silicone chuck and are firmly hold in position.

> Very easy to use; before attaching the pipette first squeeze the silicone bulb and release the air inside.

> Attach the pipette. Move the pipetting knob up-word for filling, down-word for discharging.

 For blow-out just push the discharge bellow.

> A replaceable hydrophobic membrane filter in the intale cone prevents cross contamination.

catalogue number	product descriptions
011.02.003	pipette filler
011.02.003.3	spare filter



#### **PIPETTE FILLER**

Manufactured from silicone.
 Ideal for simple pipetting applications.

Offered with three different volume capacity.







PIPETTE PUMP - "electrical"



For all kinds of pipettes from 0,1 ml to 100 ml volume range.

 Ergonomic, light weight and well balanced body offers full comfort and fatigue-free pipetting.

> Powerful pump can fill a 25 ml pipette under 4 seconds.

> Pump speed can be adjusted to 8 different levels. LCD display visually shows the selected speed. Also offers gravimetric drain.

Changeable lithium-ion batteries provide 8 hours continuous use. LCD display shows remaining battery power.

The high-tech charger prevents over charging and provides long life cycle. 2-3 hours is required for full charge.

Silicone adapter in the intake cone holds firmly the pipettes in position. Replaceable hydrophobic 0,45µm PTFE filter prevents cross contamination.

> Supplied with a wall mounting and a dual-position stand.

catalogue	for pipettes	speed	pack
number		range	quantity
010.01.005	0,1 - 100 ml	adjustable	1 piece



PIPETTE PUMP - "electrical"



For all kinds of pipettes from 0,1 ml to 100 ml volume range.

> Ergonomic, light weight and well balanced body offers full comfort and fatigue-free pipetting.

> Powerful pump can fill a 25 ml pipette under 4 seconds.

Pump speed can be selected as high and low speed modes. Also offers gravimetric drain.

Changeable lithium-ion batteries provide 8 hours continuous use. Featured with a visual red bulb low battery indicator.

> The high-tech charger prevents over charging and provides long life cycle. 2-3 hours is required for full charge.

Silicone adapter in the intake cone holds firmly the pipettes in position. Replaceable hydrophobic 0,45µm PTFE filter prevents cross contamination.

Supplied with a wall mounting and a single-position stand.

catalogue number	for pipettes	speed range	pack quantity
010.01.006	0,1 - 100 ml	adjustable	1 piece
	Ý	Replaceable hydroph 0,45 µm PTFE filter secu cross contaminai <b>Catalogue No: 610.01</b> .	
	<	Silicone adapter in the holds firmly the pipet	ne intake cone tes in position.



#### BURETTE - "digital" - "motor driven"

The most advanced digital burette featured with motor controlled piston movement. Conforms ISO 8655 standard. Guarantees reliable measuring results with bubble-free dispensing and consistent delivery with self calibration function.

➤ Offers an operating volume range from 0,01 ml to 99,99 ml with 0,01 ml resolution with a maximum piston lift of 10 ml.

Back drawn valve for recirculating the liquid into the bottle without any loss of reagent.

User friendly TFT control touchscreen guides the user for a quick and accurate titration. System also avoids manual disturbance and human errors. 16 stage dispensing speeds allow the user to achieve titration end point precisely.

Dispensing can be performed by a touch at the screen and stops immediately when the touch is removed.

BSG, PTFE, FEP are used in the liquid path provides excellent chemical resistance to most common laboratory reagents. Outer surface is made of ABS. Visible glass barrel allows inspection of the liquid before and during dispensing.

 Magnetic stirrer has a motor free design and featured with 5 programmable speeds.

#### **DISPENSER - "repetitive"**



> Ergonomically designed and light weight dispenser for fast and simple serial dispensing of liquids.

> Perfect tool for applications where repetitive dispensing is a must and where time is valuable.

> Very easy to use; first fill the dispenser tip with the liquid similar to a syringe. Then press the pipette button for each dispensing step.

All functions can be controlled only by three control mechanisms.

➤ Offers 5 volume settings and 7 different dispenser tip sizes results with 35 alternative different volumes.

Depending on the size & volume of the tip used - it is possible to dispense between 0,5 ml to 50 ml liquid in multiinterval.

> Works on the positive displacement principle which enables dispensing of even high density and high vapour liquids.

Dispensing volume can be selected from the volume scale on the body.

catalogue	pack
number	quantity
008.06.001	1 piece

Precision valve ensures easy priming and minimum waste with no back leakage into the reservoir bottle.

Discharge tube can be turned to any desired position since the body can rotate 360° round the axis.

> Featured with a built in ergonomic and compact ultra flat magnetic stirrer for easier and faster titration and also more stable and consisting results.



catalogue volume volume pack number range (ml) accuracy quantity 007.01.002 0,01-99,99 0,01 ml 1 piece

**DISPENSER TIPS - "repetitive"** 

 Dispenser tips are manufactured from clear polypropylene.

 7 different tip sizes offer 35 alternative different volumes.

 Graduation on the side of the tips enables visual confirmation of the volume.



Adapter for 25 & 50 ml tip should be ordered seperately **Cat. No: 008.06.002** 

catalogue number	dispenser tip volume	pack quantity
008.06.005	0.50 ml	10 pieces
008.06.012	1.25 ml	10 pieces
008.06.025	2.50 ml	10 pieces
008.06.050	5.00 ml	10 pieces
008.06.125	12.50 ml	10 pieces
008.06.250	25.00 ml	10 pieces
008.06.500	50.00 ml	10 pieces
008.06.002	adapter for 2	25 & 50 ml

#### DISPENSERS - "advanced model"



Guarantees reliable results with bubble-free dispensing of liquids. Fully autoclavable body provides high precision with consistent delivery.

Available in 6 volume ranges covering a range from 2,5 ml to 100 ml.

Individually calibrated according to ISO 8655 standard and supplied with a calibration certificate.

> All wetted parts are PTFE, FEP, PFA and borosilicate glass ensuring highest degree of chemical resistance.

> Springless PTFE valve manifold ensures excellent chemical compatibility and leak-proof functioning.

This also ensures wiper like movement of the piston making it suitable for all kinds of crystalline liquids.

> PTFE piston and viton "O" ring guarantees fatigue-free, smooth, effortless piston movement and high accuracy.

> Dosing cylinder is protected against breakage by a polypropylene sleeve.

> Large volume scale printed on both sides of the body guarantees fast, easy and precise volume readings.

Adapter rotates freely 360° on the bottle neck and redirects the discharge to the desired position.

> Easy volume setting with 180° rotating volume adjustment knob.

> Discharge tube cap prevents drying and accidental dropping.

> Supplied with 4 adaptors (28, 38, 40 & 45 mm diameter) to fit almost all available reservoir bottle necks.


The telescopic extractable intake tube can be adjusted simply by pulling according to different bottle heights.

Specially designed calibration tool is provided with each dispenser for convenient and fast user recalibration.

volume	without re-circulation valve	with re-circulation valve	pack quantity
0.3 - 2.5 ml	008.12.002	008.15.002	1 piece
0.5 - 5 ml	008.12.005	008.15.005	1 piece
1.0 -10 ml	008.12.010	008.15.010	1 piece
2.5 - 30 ml	008.12.030	008.15.030	1 piece
5.0 - 60 ml	008.12.060	008.15.060	1 piece
10.0 - 100 ml	008.12.100	008.15.100	1 piece



Alternative 2 dispensers:
 without recirculation valve
 with recirculation valve



Volume scale printed on both sides of the body guarantees precise volume readings.



Adapter rotates freely 360° on the bottle neck and redirects the discharge to the desired position.



Discharge tube cap reduces contact with the air and prevents drying. Also prevents accidental dropping.



Built in recirculation valve prevents reagent loss during purging,



Fast, easy and reliable volume setting with 180° rotating volume adjustment knob.



Supplied in a perfectly designed modern and sturdy box featured for compartments for every piece.

certificate.

hand sizes.

pressure.

non-autoclavable

011.06.002

011.06.010

011.06.020

011.06.050

011.06.100

011.06.200

011.06.901

011.06.905

011.06.910

pipette





#### PIPETTING RESERVOIRS - "non-sterile & sterile" - "disposable"





Easily stackable due to the tapered body form for reducing storage space.



- Manufactured from polystyrene featured with thick walls and crush-resistant corners as single, disposable use.
- > Offers a clean, practical and economical alternative to all other re-usable pipetting reservoirs.
- Featured with a visible volume marking on the side wall.
- > Large pour-back spouts at the corners guarantee safe pouring back the remaining liquid in to the original container.

Easily stackable due to the tapered body form for reducing storage space. Liquid reservoirs do not stick to each other even stacked.

Bottoms with a sloping "V" form and tapered in a narrow through guarantee maximum liquid recovery.

catalogue number	volume	product specifications	pack quantity
006.03.030	30 ml	non-sterile	100 pieces
006.13.030	30 ml	gamma sterile	10 pieces
006.03.055	55 ml	non-sterile	100 pieces
006.13.055	55 ml	gamma sterile	10 pieces
006.03.110	110 ml	non-sterile	100 pieces
006.13.110	110 ml	gamma sterile	10 pieces

#### MICROPIPETTES - "adjustable volume" - "autoclavable" - "for research"





> One pipette with exchangeable fix-volume controllers solves all your problems. Offer as single channel and 8 channel models.

➤ 9 models cover volume range from 0,2 µl to 10 ml and fullfill all the requirements of a modern pipette.

> Autoclavable, ultralight and well balanced body offers greatest comfort for extended pipetting periods.

> PP/PVDF/ anodised aluminium and stainless steel body construction guarantees the highest level of accuracy and precision.

> Dual "O" ring technology guarantees best tip fit. Outer "O" rings makes tip loading easy.

► Fast and easy volume setting with single hand. Volume setting requires 50% fewer turns compared to some brands.

 Volume lock prevents accidental volume changes during operation. Volume display is always fully visible.

➤ Thumb friendly soft spring pipetting system reduces plunger pressure by up to 50% and guarantees the whole procedure more comfortable.

> Ergonomic finger hook offers comfortable handling and to take the weight for a more relaxed grip.

 Color-coded tip ejector reduces thumb workload by 70 % compared with other brands.

 Large pad of tip ejector guarantees easy tip ejection.

> Each pipette is individually calibrated and certified. Serial number is printed on each pipette.

volume range	single channel	inaccuracy	imprecision %	8 channel	inaccuracy	imprecision %	color code	pack quantity
0.2 - 2.0 µl	011.20.002	12.00/2.00	6.00/1.00					1 piece
0.5 - 10 µl	011.20.010	2.50/1.00	1.80/0.50	011.21.010	5.00/2.00	3.60/1.00		1 piece
2 - 20 µl	011.20.020	5.00/1.00	1.50/0.30					1 piece
5 - 50 µl	011.20.050	2.00/1.00	1.20/0.30	011.21.050	3.20/1.40	1.60/0.60		1 piece
10 - 100 µl	011.20.100	2.50/0.70	1.00/0.20					1 piece
20 - 200 µl	011.20.200	2.50/0.60	0.70/0.20	011.21.200	1.80/1.20	0.80/0.40		1 piece
30 - 300 µl		1.66/1.40	0.60/0.30	011.21.300	1.66/1.40	0.60/0.30		1 piece
100 - 1000 µl	011.20.901	2.00/0.80	0.60/0.20					1 piece
1 - 5 ml	011.20.905	1.20/0.60	0.30/0.15					1 piece
1 - 10 ml	011.20.910	3.00/0.60	0.60/0.15					1 piece

#### volume lock feature



## Select the desired volume and lock the indicator.

> Volume lock feature allows selecting the desired volume and locking the indicator to achieve a more reliable pipetting experience.

> Locking feature prevents accidental volume changes during pipetting procedures.

> Simply slide the button to the upper position to lock or lower to release.

#### dual "O" ring



> Outer "O" rings make tip loading easier. The first "O" ring creates a smooth seal while the second "O" ring creates a positive stop to ensure that the tips are airtight, sealed, and can be ejected with the smallest amount of force.



#### PIPETTE TIPS - "precision" - "for research"

≻

>

precision.

Exclusive molding

to inhibit and block aerosols.

reduces the sample loss, saves costly reagents and maximises accuracy and

contamination from sample to sample

by creating a physical barrier in the tip

> Optimised shape fits to all common

pipettes to give perfect seal between the pipette tip and the pipette shaft.

> Different lengths within the same volume range for different applications.

Filtered tips prevents cross

Manufactured from FDA approved > polypropylene with consistent quality.

Manufactured in fully automatic, human touch-free, clean room facilities as DNase, RNAse, Pyrogen free. Certified on lot basis.

Low retention is achieved by a special resin which offers minimum retention and maximum accuracy allowing complete retrieval of precious samples.

> Maximum sample recovery eliminates sample hold-up, providing the most accurate sample delivery.



#### Alternative packing options:


Puncture resistant bags: Base with a wide gusset enables self-standing and allows single-handed access. Heat sealed above the zip-lock closure, product integrity and cleanliness is assured right down to the last tip.

Durable boxes: > Easy to open-close hinged lid boxes with internal rib structure provide an extremely strong platform. > Features recessed wells to ensure perfect tip allingment.



technology

catalogue number	product descriptions	packing specifications
T-B-010	pipette tip - ISOLAB - clear - 10 μl - bag	1000 pieces / bag
T-R-010	pipette tip - ISOLAB - clear - 10 µl - box	96 pieces / box
T-R-S-010	pipette tip - ISOLAB - clear - 10 µl - box - sterile	96 pieces / box
TF-010	pipette tip - filter - ISOLAB - clear - low retention - 10 µl - bag	1000 pieces / bag
TF-R-S-010	pipette tip - filter - ISOLAB - clear - low retention - 10 µl - box - sterile	96 pieces / box
T-B-011	pipette tip - ISOLAB - clear - long - 10 μl - bag	1000 pieces / bag
T-R-011	pipette tip - ISOLAB - clear - long - 10 μl - box	96 pieces / box
T-R-S-011	pipette tip - ISOLAB - clear - long - 10 µl - box - sterile	96 pieces / box
TF-011	pipette tip - filter - ISOLAB - clear - low retention - long - 10 µl - bag	1000 pieces / bag
TF-R-S-011	pipette tip - filter - ISOLAB - clear - low retention - long - 10 μl - box - sterile	96 pieces / box
TF-R-S-021	pipette tip - filter - ISOLAB - clear - low retention - long - 20 µl - box - sterile	96 pieces / box
TF-50	pipette tip - ISOLAB - with filter - clear - 50 μl - bag	1000 pieces / bag
TF-R-S-50	pipette tip - ISOLAB - clear - low retention - 50 µl - box - sterile	96 pieces / box
TF-100	pipette tip - filter - ISOLAB - clear - low retention - 100 µl - bag	1000 pieces / bag
TF-R-S-100	pipette tip - filter - ISOLAB - clear - low retention - 100 µl - box - sterile	96 pieces / box
T-B-200	pipette tip - ISOLAB - clear - 200 µl - bag	1000 pieces / bag
T-R-200	pipette tip - ISOLAB - clear - 200 µl - box	96 pieces / box
T-R-S-200	pipette tip - ISOLAB - clear - 200 µl - box - sterile	96 pieces / box
TF-200	pipette tip - filter - ISOLAB - clear - low retention - 200 μl - bag	1000 pieces / bag
TF-R-S-200	pipette tip - filter - ISOLAB - clear - low retention - 200 µl - box - sterile	96 pieces / box
T-B-300	pipette tip - ISOLAB - clear - 300 μl - bag	1000 pieces / bag
T-R-300	pipette tip - ISOLAB - clear - 300 µl - box	96 pieces / box
T-R-S-300	pipette tip - ISOLAB - clear - 300 µl - box - sterile	96 pieces / box
TF-300	pipette tip - filter - ISOLAB - clear - low retention - 300 µl - bag	1000 pieces / bag
TF-R-S-300	pipette tip - filter - ISOLAB - clear - low retention - 300 µl - box - sterile	96 pieces / box
T-B-1000	pipette tip - ISOLAB - clear - 1000 µl - bag	1000 pieces / bag
T-R-1000	pipette tip - ISOLAB - clear - 1000 µl - box	96 pieces / box
T-R-S-1000	pipette tip - ISOLAB - clear - 1000 μl - box - sterile	96 pieces / box
TF-1000	pipette tip - filter - ISOLAB - clear - low retention - 1000 μl - bag	1000 pieces / bag
TF-R-S-1000	pipette tip - filter - ISOLAB - clear - low retention - 1000 µl - box - sterile	96 pieces / box
T-B-1250	pipette tip - ISOLAB - clear - 1250 µl - bag	500 pieces / baq
T-R-1250	pipette tip - ISOLAB - clear - 1250 µl - box	96 pieces / box
T-R-S-1250	pipette tip - ISOLAB - clear - 1250 μl - box - sterile	96 pieces / box
TF-1250	pipette tip - filter - ISOLAB - clear - low retention - 1250 μl - bag	500 pieces / baq
TF-R-S-1250	pipette tip - filter - ISOLAB - clear - low retention - 1250 µl - box - sterile	96 pieces / box
TB-5000A	pipette tip - ISOLAB - clear - 5000 µl - bag	100 pieces / bag
TB-5000A-S	pipette tip - ISOLAB - clear - 5000 µl - bag - sterile	100 pieces / bag
TB-5000B	pipette tip - ISOLAB - clear - 5000 µl - bag	100 pieces / bag
TB-5000B-S	pipette tip - ISOLAB clear - 5000 µl - bag - sterile	100 pieces / bag
TB-10000A	pipette tip - ISOLAB - clear - 10000 μl - bag	100 pieces / bag
TB-10000A-S	pipette tip - ISOLAB - clear - 10000 µl - bag - sterile	100 pieces / bag
TB-10000B	pipette tip - ISOLAB - clear - 10000 µl - bag	100 pieces / bag
	pipette tip - ISOLAB - clear - 10000 µl - bag - sterile	100 pieces / bag

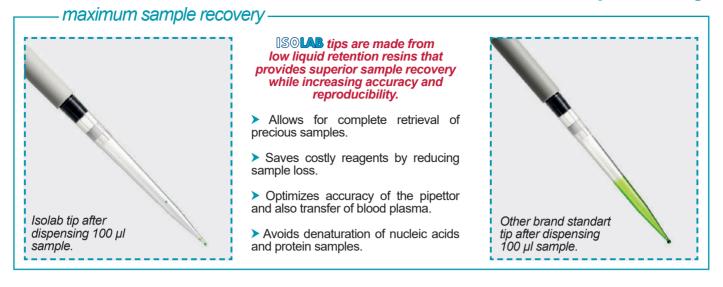


filter tips -




► Filter barriers block aerosols by coalescing radioactive, chemical or biological contaminants before they can come in contact of pipettor shaft.

➤ Their usage is mostly essential in critical applications such as PCR, DNA sequencing and other techniques that involve the use of vaporous, biohazardous or corrosive material.

➤ Tip filters also act as a safety barrier against accidental over-pipetting of liquids without risk of sample lock-up.

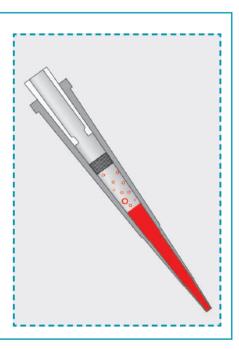



#### PIPETTE TIPS - "economical"

Manufactured from high quality pure polypropylene which is highly resistant to chemicals and thermal effects.

Produced to match wide variety of pipettors for secure sealing and easy tip ejecting.

> Uniformity in size and shape allows perfect fitting with almost all micropipettes.

> Flashfree and uniform delivery orifice for consistent accuracy and reproducible sample delivery.

> Thin wall and small surface area at the tip minimize the possible tip retaining samples droplets.

catalogue number	capacity	color	pack quantity
005.01.001	10 µl	clear	1000 pcs
005.01.002	200 µl	yellow	1000 pcs
005.01.003	1000 µl	blue	500 pcs
005.01.004	5 ml	clear	250 pcs
005.01.005	10 ml	clear	100 pcs
005.01.015	10 ml	clear	100 pcs

Please kindly order 005.01.005 pipette tips for 011.05.910

Please kindly order 005.01.015 pipette tips for 011.06.910 and 011.20.910



STAND - "micropipette" "carrousel"

> Manufactured from polypropylene for using with most common micropipette brands.

This space saving, robust stand can hold up to 6 pipettes comfortably.

The round carrousel stand can rotate 360° around the axis enabling easy reach of any pipette.

catalogue	base	total	pack
number	diameter	height	quantity
006.11.005	160 mm	320 mm	1 piece





STAND - "micropipette" "linear"

 Manufactured from polypropylene for using with most common micropipette brands.

Offers practical and easy direct access to micropipettes.

This space saving, robust stand can hold up to 6 pipettes comfortably.



Linear micropipette stand can also hold multi-channel pipettes.

catalogue pack number dimensions quantity 006.11.006 143 x 290 x 290 mm 1 piece



STAND - "micropipette" "adjustable"

Manufactured from acrylic with ergonomic angled body form with adjustable pipette holding option.

> Can be used with most pipette brands.

> Depending on the stand size enables easy holding and handling of 4 or 6 single channel pipettes.



The unique adjustable pipette holding design guarantees the use with different height pipettes.

 
 catalogue number
 pack dimensions
 pack quantity

 006.12.004
 130 x 260 x 220 mm
 1 piece

 006.12.006
 150 x 380 x 220 mm
 1 piece

#### STAND - "micropipette" - "with bin"


 Manufactured from acrylic with a bin. The top support can hold 4 single channel pipettes.

> Generous opening of the bin provides easy and safe access to partitions.

Cover is featured with easy opening sliding lid. Once opened, the lid stays open and enables easy filling and dispensing.

Bin guarantees safe and clean storage of box pipette tips without been effected from dust, moisture and other environmental effects.

> Featured with non-skid silicone feet for safe and stable stand on the laboratory desks.





Bin guarantees safe and clean storage of pipette tips without been effected from dust, moisture and other environmental effects.

Cover is featured with easy opening sliding lid. Once opened, the lid stays open and enables easy filling and dispensing.

024





026

## lab consumables & labware






#### **BEAKERS** - "glass"

▶ Manufactured from heat resistant, borosilicate glass 3.3 according to ISO 3819 and DIN 12331 standards.

Thick wall, heavy base and reinforced rim prevent breakage.

catalogue number	volume	pack quantity
025.01.005	5 ml	10 pieces
025.01.010	10 ml	10 pieces
025.01.025	25 ml	10 pieces
025.01.050	50 ml	10 pieces
025.01.100	100 ml	10 pieces
025.01.150	150 ml	10 pieces
025.01.250	250 ml	10 pieces
025.01.400	400 ml	10 pieces
025.01.600	600 ml	10 pieces
025.01.800	800 ml	10 pieces
025.01.901	1000 ml	10 pieces
025.01.902	2000 ml	6 pieces
025.01.905	5000 ml	1 piece
025.01.910	10000 ml	1 piece






Various beaker tongs can be selected from catalogue page no 52.



> Manufactured from ultra clear polypropylene according to ISO 7056 standard with thick walls. Resistant to most acids, bases and many commonly used solvents. Functional large spout minimize possible spills during liquid transfer.

embossed scale	volume	pack quantity
026.01.025	25 ml	1 piece
026.01.050	50 ml	1 piece
026.01.100	100 ml	1 piece
026.01.250	250 ml	1 piece
026.01.500	500 ml	1 piece
026.01.901	1000 ml	1 piece
026.01.902	2000 ml	1 piece

blue printed scale	volume	pack quantity
026.03.025	25 ml	1 piece
026.03.050	50 ml	1 piece
026.03.100	100 ml	1 piece
026.03.250	250 ml	1 piece
026.03.500	500 ml	1 piece
026.03.901	1000 ml	1 piece
026.03.902	2000 ml	1 piece



**BEAKERS - "stainless steel"** 

Manufactured from AISI 304 grade stainless steel.

> Highly polished smooth interior enables much easier cleaning.

catalogue number	volume	pack quantity
025.04.100	100 ml	1 piece
025.04.250	250 ml	1 piece
025.04.500	500 ml	1 piece
025.04.901	1000 ml	1 piece



#### **BEAKERS - "PTFE"**

► Manufactured from chemically inert PTFE with excellent chemical resistance, and high temperature resistance between -200°C to +260°C.

catalogue number	volume	pack quantity
025.03.050	50 ml	1 piece
025.03.100	100 ml	1 piece
025.03.250	250 ml	1 piece
025.03.500	500 ml	1 piece
025.03.901	1000 ml	1 piece



BEAKERS WITH HANDLE - "P.P" - "embossed & printed scale"

> Manufactured from ultra clear polypropylene according to ISO 7056 standard with thick walls. Resistant to most acids, bases and many commonly used solvents.

- > Functional large spout minimize possible spills during liquid transfer.
- > Easily stackable due to the tapered body form for reducing storage space.

embossed scale	volume	pack quantity
026.02.250	250 ml	1 piece
026.02.500	500 ml	1 piece
026.02.901	1000 ml	1 piece
026.02.902	2000 ml	1 piece
026.02.903	3000 ml	1 piece

blue printed	volume	pack quantity
026.04.250	250 ml	1 piece
026.04.500	500 ml	1 piece
026.04.901	1000 ml	1 piece
026.04.902	2000 ml	1 piece
026.04.903	3000 ml	1 piece

#### FLASKS - "glass" "round & flat bottom"

• Manufactured from heat resistant, borosilicate glass 3.3 according to ISO 1773 standard.

> Thick wall, heavy base and reinforced rim prevent breakage.





Various flask stands can be selected from catalogue page no 99.



round bottom	volume	pack quantity
029.02.050	50 ml	10 pieces
029.02.100	100 ml	10 pieces
029.02.250	250 ml	10 pieces
029.02.500	500 ml	10 pieces
029.02.901	1000 ml	10 pieces
029.02.902	2000 ml	6 pieces
029.02.904	4000 ml	1 piece
029.02.906	6000 ml	1 piece
029.02.910	10000 ml	1 piece



#### BEAKERS WITH HANDLE "stainless steel"

 Manufactured from AISI 304 grade stainless steel.


> Highly polished smooth interior enables much easier cleaning.

Moulded graduations on the side wall offer easy volume identification.

catalogue number	volume	pack quantity
025.05.500	500 ml	1 piece
025.05.901	1000 ml	1 piece
025.05.902	2000 ml	1 piece



volume	pack quantity
50 ml	10 pieces
100 ml	10 pieces
250 ml	10 pieces
500 ml	10 pieces
1000 ml	10 pieces
2000 ml	6 pieces
4000 ml	1 piece
6000 ml	1 piece
10000 ml	1 piece
	50 ml 100 ml 250 ml 500 ml 1000 ml 2000 ml 4000 ml 6000 ml



ERLENMEYERS - "clear" "glass" - "narrow neck"

 Manufactured from heat resistant, borosilicate glass 3.3 according to ISO 1773 standard.

Thick wall, heavy base and reinforced rim prevent breakage.

catalogue number	volume	pack quantity
027.01.025	25 ml	10 pieces
027.01.050	50 ml	10 pieces
027.01.100	100 ml	10 pieces
027.01.250	250 ml	10 pieces
027.01.300	300 ml	10 pieces
027.01.500	500 ml	10 pieces
027.01.901	1000 ml	10 pieces
027.01.902	2000 ml	6 pieces
027.01.903	3000 ml	1 piece
027.01.905	5000 ml	1 piece



ERLENMEYERS - "clear" "glass" - "screw cap"

► Manufactured from heat resistant, borosilicate glass 3.3 with a leak-proof screw cap.

Thick wall, heavy base and reinforced rim prevent breakage.

 Supplied with a polypropylene screw cap with large ridges for increased grip.

► Unique internal flanged design of the caps guarantees leak-proof closure.

catalogue number	neck size	volume	pack quantity
027.03.100	GL 32	100 ml	1 piece
027.03.250	GL 32	250 ml	1 piece
027.03.500	GL 32	500 ml	1 piece
027.03.901	GL 32	1000 ml	1 piece



ERLENMEYERS - "clear" "polypropylene" - "screw cap"


> Manufactured from clear polypropylene.

 Thick wall, heavy base and reinforced rim prevent breakage.

> Supplied with a polypropylene screw cap with large ridges for increased grip.

 Unique internal flanged design of the caps guarantees leak-proof closure.

catalogue number	neck size	volume	pack quantity
028.03.050	GL 40	50 ml	1 piece
028.03.100	GL 40	100 ml	1 piece
028.03.250	GL 52	250 ml	1 piece
028.03.500	GL 52	500 ml	1 piece
028.03.901	GL 52	1000 ml	1 piece

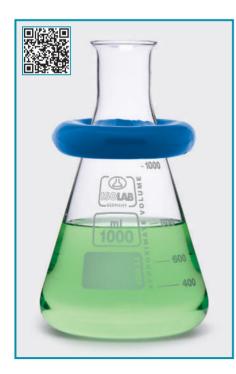

STABILISING RINGS - "for erlenmeyers & flasks"

> Manufactured from heavy alloy with different internal diameters for perfect fit to the necks of various volume erlenmeyers and flasks.

➤ Can fit neatly around the neck of erlenmeyers and other flasks preventing falling over or floating risks in water baths.

> Soft vinyl coated ring surface prevents scratching the glass surface during use.



catalogue number	internal diameter	external diameter	recommended for	pack quantity
027.11.048	48 mm	85 mm	100 ml - 500 ml	1 piece
027.11.056	56 mm	100 mm	250 ml - 1000 ml	1 piece
027.11.061	61 mm	115 mm	500 ml - 2000 ml	1 piece
027.11.074	74 mm	129 mm	1000 ml - 4000 ml	1 piece





Featured with 4 integrated baffles for efficient mixing. Baffles create a turbulent flow, enlarge gas exchange surface and increase oxygen intake.

#### ERLENMEYERS - "baffled - straight neck - for cell culture"

> Manufactured from borosilicate glass. Featured with 4 integrated baffles for efficient mixing.

Baffles create a turbulent flow, enlarge gas exchange surface and increase oxygen intake. Baffles also allow stable swirling for effective mixing.

> Widely used in microbiology for the preperation of microbial suspension culture. Ideal for cultivating S. Cerevisiae and aerobic bacteria cultures.



#### CAP - "aluminium" Manufactured from aluminium for perfect fit to the necks of glass baffled erlenmeyers with straight neck.

Chrome nickel springs grip to the neck of the outer wall of the vessel.

catalogue number pack quantit 027.06.101 1 piece

ERLENMEYERS - "for cell culture" - "sterile"

> Manufactured from PETG. Caps are manufactured from HDPE.

> Widely used for the preparation of suspension cultures both in cell culture and microbiological applications such as E.coli, plant callus, etc.

volume	catalogue number	cap type	catalogue number	cap type	pack quantity
250 ml	027.17.250	plug	027.18.250	filter	12 pieces
500 ml	027.17.500	plug	027.18.500	filter	12 pieces
1000 ml	027.17.901	plug	027.18.901	filter	6 pieces

> Thick wall, heavy base and reinforced rim prevent breakage. Supplied without caps.

catalogue number	volume	neck diameter	largest outer dia.	height	pack quantity
027.06.100	100 ml	38 mm	64 mm	112 mm	1 piece
027.06.250	250 ml	38 mm	85 mm	145 mm	1 piece
027.06.500	500 ml	38 mm	105 mm	182 mm	1 piece
027.06.901	1000 ml	38 mm	129 mm	230 mm	1 piece
027.06.902	2000 ml	38 mm	165 mm	275 mm	1 piece



#### STOPPER - "cellulose"

Manufactured from additive free autoclavable. Air permeable, actively breathing best quality cellulose.

Provide excellent sealing for microbiological samples in tissue culture tubes, flasks etc.

catalogue	pack
number	quantity
051.24.009	10 pieces





#### COATED BOTTLES - "glass" - "clear & amber"

> When handling dangerous and/or valuable solutions coated bottles are highly recommended.

> They are featured with identical technical specifications of clear and amber bottles with codes 061.01.xxx and 061.02.xxx.

Bodies of these bottles are coated with a special formulated coating which reduces the impacts. Coating covers the body like a protective glove and holds the broken parts unscattered.

> The coating also holds the broken glass together so that the leakage will be minimum. In most of the cases this coating keeps the solutions still inside the flask body without leakage.

> The coating is highly transparent and can resist up to 135°C with maximum period of 30 minutes. These bottles can be cleaned at maximum 95°C and can be reapetably autoclaved at 121°C.

Coated bottles should not be exposed directly to open flame.

volume	neck NS size	coated clear bottles	coated amber bottles	pack quantity
100 ml	GL 45	061.01.100C	061.02.100C	1 piece
250 ml	GL 45	061.01.250C	061.02.250C	1 piece
500 ml	GL 45	061.01.500C	061.02.500C	1 piece
1000 ml	GL 45	061.01.901C	061.02.901C	1 piece
2000 ml	GL 45	061.01.902C	061.02.902C	1 piece

#### BOTTLES - "ISO" - "borosilicate glass"

> Manufactured from heat resistant, durable borosilicate glass with thick walls and crush-resistant corners.

> These impact resistant, excellently thermal stable bottles are autoclavable at 121°C. Caps should not be closed during autoclaving.

> Angled neck form allows unrestricted liquid flow out without leaving any residue at the bottle neck.

> A large GL 45 bottle neck provides easy filling and pouring. Unique design pouring ring prevents drops and spillage.

> Caps are made from polypropylene with large ridges with increased grip. Cap inner design ensures hermetical and leak-proof closure.

➤ Volume graduations on wall side offers better liquid level viewing. Graduations and inscriptions are printed with white enamel.



volume	neck NS size	clear bottles	pack quantity	amber bottles	pack quantity
100 ml	GL 45	061.01.100	10 pieces	061.02.100	1 piece
250 ml	GL 45	061.01.250	10 pieces	061.02.250	1 piece
500 ml	GL 45	061.01.500	10 pieces	061.02.500	1 piece
1000 ml	GL 45	061.01.901	10 pieces	061.02.901	1 piece
2000 ml	GL 45	061.01.902	4 pieces	061.02.902	1 piece
3000 ml	GL 45	061.01.903	1 piece	061.02.903	1 piece
5000 ml	GL 45	061.01.905	1 piece	061.02.905	1 piece
10000 ml	GL 45	061.01.910	1 piece	061.02.910	1 piece
20000 ml	GL 45	061.01.920	1 piece	061.02.920	1 piece





Such informations as lot number, production and expiry dates etc. are indicated on the packing.

#### BOTTLES - "ISO" - "polypropylene"

Manufactured from special formulated polypropylene with thick walls and crush-resistant corners.

> Featured with high transperancy and best chemical heat tolerance.

➤ These impact resistant, excellently thermal stable bottles are autoclavable at 121°C. Caps should not be closed during autoclaving

Angled neck form allows unrestricted liquid flow out without leaving any residue at the bottle neck.

A large GL 45 bottle neck provides easy filling and pouring. Unique design of the neck with moulded pouring ring prevents drops and spillage.

> Cap with large ridges with increased grip featured with self lock and internal security ring. Cap inner design ensures hermetical and leak-proof closure.

Embossed volume graduations on wall side offers better liquid level viewing and reproducable filling of the bottle without the need of a measuring cylinder.

## Alternative 2 bottles: Amber bottles

Clear bottles are manufactured from very clear polypropylene resulting with high transperancy and for better view of the bottle content.

> Amber bottles are manufactured from special formulated polypropylene preventing UV light penetration into the flask yet still offering high transperancy.

## Alternative 2 products: Non-sterile bottles Gamma sterile bottles

> Sterile bottles are manufactured at aseptically sterile production halls and then send to gamma sterilisation. Such informations as lot number, production and expiry dates etc are indicated on the packing.

clear bottles non-sterile	clear bottles gamma sterile	amber bottles non-sterile	amber bottles gamma sterile	neck size	volume	pack quantity
061.15.100	061.16.100	061.17.100	061.18.100	GL 45	100 ml	100 pieces
061.15.250	061.16.250	061.17.250	061.18.250	GL 45	250 ml	100 pieces
061.15.500	061.16.500	061.17.500	061.18.500	GL 45	500 ml	100 pieces
061.15.901	061.16.901	061.17.901	061.18.901	GL 45	1000 ml	50 pieces
061.15.902	061.16.902	061.17.902	061.18.902	GL 45	2000 ml	50 pieces



Unique design of the cap with intended top plate guarantees tight and leakproof closure.



Integral security ring of the cap ensures safe and untouched protection of the bottle content.



Caps are made from robust and thick polyethylene with large ridges for increased grip.



Unique neck design with moulded pouring ring prevents drops and liquid splash.

#### BOTTLES - "square" - "wide neck" - "polyethylene"

Manufactured from polyethylene with thick walls and crushresistant corners.

> A large bottle neck provides easy filling and pouring.

Cap offers increased grip. Featured with an insert plug for hermetical and leak-proof closure.

> Bottle neck and the cap carry holes for enabling the insertion of the security seal wire.

> The space between the cap and the insert plug can be used for securing confidential notes.

> Embossed volume graduations on wall side offers better liquid level viewing and reproducable filling of the bottle without the need of a measuring cylinder.

# Alternative 2 bottles: Clear bottles Amber bottles

Clear bottles are manufactured from very clear P.E resulting with high transperancy and for better view of the bottle content.

> Amber bottles are manufactured from special formulated P.E preventing UV light penetration into the flask yet still offering high transperancy.

amber bottles	bottle volume	dimensions	pack quantity
061.08.050	50 ml	37x39x73 mm	50 pieces
061.08.100	100 ml	50x45x90 mm	50 pieces
061.08.250	250 ml	64x57x112 mm	50 pieces
061.08.500	500 ml	85x72x140 mm	50 pieces
061.08.901	1000 ml	104x82x173 mm	50 pieces
061.08.902	2000 ml	134x100x210 mm	50 pieces
	bottles 061.08.050 061.08.100 061.08.250 061.08.500 061.08.901	bottles         volume           061.08.050         50 ml           061.08.100         100 ml           061.08.250         250 ml           061.08.500         500 ml           061.08.901         1000 ml	bottles         volume         dimensions           061.08.050         50 ml         37x39x73 mm           061.08.100         100 ml         50x45x90 mm           061.08.250         250 ml         64x57x112 mm           061.08.500         500 ml         85x72x140 mm           061.08.901         1000 ml         104x82x173 mm

#### **SECURITY SEALS**

> Security seal is used to ensure the safety locking and durability of the product inside the bottles.

> 4 different colors are used to identify among the seals with identification numbers printed on the seal plate.

ISOLAB 000000	ISOLAB 000000	ISOLAB 000000	ISOLAB 000000
		T	
061.09.0B1	061.09.0R1	061.09.0Y1	061.09.0G1


061.09.0B1

061.09.0Y1

catalogue number	color	pack quantity
061.09.0B1	blue	10 pieces
061.09.0R1	red	10 pieces
061.09.0Y1	yellow	10 pieces
061.09.0G1	green	10 pieces

#### **SECURITY SEAL CUTTER**

Security seal cutter is a perfect tool to cut security seal wires easily.







The space between cap and insert plug can be used for private and confidential notes.



Insert the seal wire through the holes of both the cap and bottle itself. Then insert the wire into the hole of the seal as shown.



Last step is to wind the seal key clockwise until the seal wire gets tight enough to provide optimum security lock.



#### BOTTLES - "glass" - "wide neck"

Manufactured from neutral glass with thick walls and crushresistant corners.

> Ideal for safe storage and transportation of liquids and powders.

Thick wall, heavy base and reinforced rim prevent breakage during washing and transportation.

> A large bottle neck provides easy filling and pouring. Unique design of the neck prevents drops and spillage.

Caps are made from polypropylene with large ridges for fast closure.

 Cap inner design with LDPE washer ensures hermetical and leak-proof closure.

# Alternative 2 bottles: Clear bottles Amber bottles

Amber bottles prevents UV light penetration into the bottle and protects sensitive samples.



clear bottles	amber bottles	volume	neck size	bottle diameter	bottle height	pack quantity
061.10.050	061.11.050	50 ml	32 mm	44 mm	75 mm	10 pieces
061.10.100	061.11.100	100 ml	40 mm	50 mm	93 mm	10 pieces
061.10.250	061.11.250	250 ml	55 mm	70 mm	113 mm	10 pieces
061.10.500	061.11.500	500 ml	55 mm	85 mm	154 mm	10 pieces
061.10.901	061.11.901	1000 ml	68 mm	104 mm	181 mm	10 pieces

## BOTTLES - "aluminium"

> These odour-natural, impervious to light and rust proof bottles are manufactured from aluminium.

Ideal for storing and transporting of samples and products which have to be stored totally unhaltered.

Bottle neck provides easy filling and pouring. Unique design of the neck prevents drops and spillage.

> Caps with large ridges with increased grip featured with self lock and internal security ring. Cap inner design ensures hermetical and leak-proof closure.

> These bottles are supplied with an insert plug for hermetical and leak-proof closure.

> Round neck form allows unrestricted liquid flow out without leaving any residue at the bottle neck.

▶ 6 It, 12 It and 31 It aluminium bottles are featured with a sturdy handle for easy carrying.





catalogue number	volume	neck size	bottle diameter	bottle height	pack quantity
061.14.025	25 ml	GL 18	40 mm	80 mm	10 pieces
061.14.060	60 ml	GL 32	45 mm	90 mm	10 pieces
061.14.120	120 ml	GL 32	50 mm	120 mm	10 pieces
061.14.300	300 ml	GL 32	55 mm	165 mm	10 pieces
061.14.600	600 ml	GL 45	75 mm	195 mm	10 pieces
061.14.901	1200 ml	GL 45	90 mm	225 mm	10 pieces
061.14.906	6 L	GL 60	173 mm	335 mm	1 piece
061.14.912	12 L	GL 50	215 mm	430 mm	1 piece
061.14.931	31 L	GL 50	310 mm	500 mm	1 piece



catalogue number	volume	recommended for	neck size	bottle Ø x H	pack quantity
061.47.050	50 ml	for powders	GL 40	50x78 mm	10 pieces
061.47.125	125 ml	for powders	GL 40	55x109 mm	10 pieces
061.47.250	250 ml	for powders	GL 60	69x130 mm	10 pieces
061.47.500	500 ml	for powders	GL 60	82x172 mm	10 pieces
061.47.901	1000 ml	for powders	GL 60	100x210 mm	10 pieces
061.46.901	1000 ml	for liquids	GL 45	100x222 mm	10 pieces
061.46.902	2500 ml	for liquids	GL 45	140x300 mm	10 pieces



item no	catalogue number	volume	neck size	neck O.D	W x L x H (mm)	pack quantity
1	061.41.500	500 ml	GL 45	45 mm	90 x 90 x163	50 pieces
2	061.41.901	1000 ml	GL 45	45 mm	95 x 95 x 207	50 pieces
3	061.41.902	2500 ml	GL 45	45 mm	127 x 127 x 310	25 pieces
4	061.41.905	5000 ml	GL 45	45 mm	145 x 145 x 386	25 pieces

#### BOTTLES - "glass"

> Manufactured from neutral glass with thick walls and amber color.

> Amber bottles prevents UV light penetration into the bottle and protects sensitive samples.

 Specially recommended for safe storage and transportation of liquids, powders and pastes.

> Thick wall, heavy base and reinforced rim prevent breakage during washing and transportation.

 Bottle necks provide easy filling and pouring of samples.

 Caps are made from P.E with large ridges for fast closure.

Cap inner design with inverted top plate ensures hermetical and leak-proof closure. GL 45 caps for liquid bottles are featured with a PTFE protective insert.

> Featured with self lock and internal security ring for safe protection of the bottle content.

#### BOTTLES - "HDPE" - "for liquids"

Manufactured from best quality high density polyethylene with thick walls and crush-resistant corners to minimise deformation by vacuum.

They offer remarkable resistance and durability with highest safety. Wide base avoids the risk of tip over.

➤ Bottles 2,5 It and higher volume are featured with a full hand handle for easier and safe product pouring.

> The large bottle neck provides easy filling and pouring. Unique design of the neck with moulded pouring ring prevents drops and spillage.

> Cap inner design with inverted top plate ensures hermetical and leak-proof closure. GL 45 caps for liquid bottles are featured with a PTFE protective insert.

> Featured with self lock and internal security ring for safe protection of the bottle content.



Unique design of the cap with inverted top plate guarantees tight and leakproof closure.



Integral security ring of the cap ensures safe and untouched protection of the bottle content.



Caps are made from robust and thick polyethylene with large ridges for increased grip.



GL 45 caps for liquid bottles are featured with a PTFE protective insert for additional safety.

#### **BOTTLES - "HDPE"**

Manufactured from best quality high density polyethylene with thick walls and crush-resistant corners to minimise deformation by vacuum.

They offer remarkable resistance and durability with highest safety. Wide base avoids the risk of tip over of the bottle and maximises safety.

> These bottles guarantee optimum solutions for safe handling, storage and transport of solid chemicals.

The large bottle neck provides easy filling and pouring. Unique design of the neck with moulded pouring ring prevents spillage.

 Cap inner design with inverted top plate ensures hermetical and leak-proof closure.

Featured with self lock and internal security ring for safe protection of the bottle content.





item no	catalogue number	volume	neck size	neck O.D	W x L x H (mm)	pack quantity
1	061.42.125	125 ml	GL 45	45 mm	60 x 60 x 96	50 pieces
2	061.42.250	250 ml	GL 63	63 mm	86 x 86 x 145	50 pieces
3	061.42.500	500 ml	GL 63	63 mm	90 x 90 x 175	50 pieces
4	061.42.901	1000 ml	GL 63	63 mm	96 x 96 x 207	50 pieces
5	061.42.911	1500 ml	GL 63	63 mm	116 x 116 x 246	50 pieces
6	061.42.902	2500 ml	GL 80	80 mm	127 x 127 x 272	25 pieces



Unique design of the cap with inverted top plate guarantees tight and leakproof closure.



Integral security ring of the cap ensures safe and untouched protection of the bottle content.



#### BOTTLES - "PET" - "sterile"

Manufactured from special formulated PET with thick walls and crush-resistant corners. Specially recommended for safe storage and transportation of cell culture media.

These bottles are manufactured at aseptically sterile production halls and then send to gamma sterilisation. They can be used for all analysis where a sterile sample is required.

➤ The bottle neck provides easy filling and pouring. Their square shape offers maximum space saving. Caps are made from polyethylene with large ridges for fast closure.

Embossed volume graduations on wall side offer better liquid level viewing.

catalogue number	volume	neck size	bottle W x L x H (mm)	pack quantity	box quantity
061.09.125	125 ml	32 mm	53x53x105	36 pieces	144 pieces
061.09.250	250 ml	32 mm	59x59x147	32 pieces	96 pieces
061.09.500	500 ml	32 mm	77x77x174	32 pieces	96 pieces
061.09.901	1000 ml	32 mm	93x93x214	24 pieces	48 pieces

# lab consumables & labware



BOTTLES - "for water sampling" - "polypropylene"

Manufactured from polypropylene for taking, transporting and storing of water samples for microbiological analysis. They can be used for all analysis where a sterile sample is required.

> Bottles are manufactured at aseptically sterile production halls and then sent to gamma sterilisation. Such informations as lot number, production and expiry dates etc are indicated on the packing.

> Square bottle form offers easy handling and optimum space saving solutions. GL 50 wide bottle neck provides easy filling and pouring.

> Cap with large ridges with increased grip featured with self lock and internal security ring. Cap inner design ensures hermetical and leak-proof closure. Caps are made of polyethylene.

Embossed volume graduations on wall side offer better liquid level viewing.

# Alternative 2 bottles: Without sodium thiosulfate With sodium thiosulfate

> Bottles with sodium thiosulfate (20 mg/lt - according to ISO/ FIS 19458/2006 standard) are ideal for water analysis where chlorine may modify the composition of the sample.

> "Bulk packed", where bottles are packed as a group in a box.

> Alternative 2 packing:

 "Single packed", where bottles are first individually packed in P.E bags and then repacked in a box.

Alternative 2 colors:
 Clear bottles
 Amber bottles



Self sealing lock caps with integral security ring. Cap inner design ensures hermetical closure and guarantees excellent leak proof closure. an



sample and source descriptions, code and lot numbers, expiry date and other informations.

Caranus In (

20 mg/ later Par

Cap with large ridges with supervised grip featured with self lock and internal security ring. Cap inner design ensures hormotical and lock proof hermetical and leak-proof closure.



Clear bottles are manufactured from very clear P.P resulting with high transperancy and for better view of the bottle content.

Amber bottles > are manufactured from special formulated P.P preventing UV light penetration into the flask yet still offering high transperancy.

"Single packed", where bottles are first individually packed in P.E bags and then repacked in a box.

bulk packed bottles	bottle volume	bottle dimensions	clear bottles W/O sodium thiosulfate	clear bottles with sodium thiosulfate	amber bottles W/O sodium thiosulfate	amber bottles with sodium thiosulfate	packing specifications
ach	125 ml	57 x 57 x 90	061.21.125	061.23.125	061.22.125	061.24.125	180 pcs in box
d ti	250 ml	60 x 60 x 115	061.21.250	061.23.250	061.22.250	061.24.250	108 pcs in box
	500 ml	70 x 70 x 145	061.21.500	061.23.500	061.22.500	061.24.500	84 pcs in box
4	1000 ml	90 x 90 x 175	061.21.901	061.23.901	061.22.901	061.24.901	30 pcs in box
ked	bottle volume	bottle dimensions	clear bottles W/O sodium thiosulfate	clear bottles with sodium thiosulfate	amber bottles W/O sodium thiosulfate	amber bottles with sodium thiosulfate	packing specifications
backed fles						amber bottles with sodium thiosulfate 061.28.125	packing specifications 130 pcs in box
le packed ottles	volume	dimensions	sodium thiosulfate	sodium thiosulfate	sodium thiosulfate		
single packed bottles	volume 125 ml	dimensions 57 x 57 x 90	sodium thiosulfate 061.25.125	sodium thiosulfate 061.27.125	sodium thiosulfate 061.26.125	061.28.125	130 pcs in box



#### **CONTAINER CUP**

Manufactured from clear polypropylene with 40 ml effective volume.

The press-on cap ensures hermetical and leak-proof closure. Scale on side wall for easy volume identification.

 Frosted marking area on side wall enables easy marking and labelling.

catalogue number	product description	pack quantity
087.02.001	non-sterile cups	1000 pieces
087.02.002	aseptic sterile cups	500 pieces



JARS - "glass" - "wide neck"

Manufactured from neutral glass with thick walls and crush-resistant corners.

Ideal for safe storage and transportation of liquids and powders.

 Enamaled steel cap inner design ensures hermetical and leak-proof closure.

catalogue number	volume	jar diameter	pack quantity
061.29.040	40 ml	43 mm	10 pieces
061.29.105	105 ml	49 mm	10 pieces
061.29.370	370 ml	72 mm	10 pieces
061.29.720	720 ml	90 mm	10 pieces
061.29.901	1000 ml	95 mm	10 pieces



JARS - "P.P" - "wide neck"

> Manufactured from special formulated polypropylene with thick walls and crush-resistant corners.

Resistant to most acids, bases and many commonly used solvents.

Ideal for safe storage and transportation of liquids and powders.

 Caps are made from polypropylene with large ridges with increased grip. Cap ensures leak-proof closure.

catalogue number	volume	jar diameter	pack quantity
061.13.001	250 ml	90 mm	1 piece
061.13.002	410 ml	90 mm	1 piece
061.13.004	1270 ml	140 mm	1 piece
061.13.006	1420 ml	140 mm	1 piece
061.13.008	1800 ml	140 mm	1 piece





Committed to



ISOLAB chemicals is a registered trademark of ISOLAB Laborgeräte GmbH



#### BOTTLES - "spray"

> Manufactured from transparent PET with a spray head.

All media contacting parts perfectly resist to most solvents and chemicals.

Liquids can be finely vaporised with the pull of the hand pump trigger.

> Feature with a safety lock at the trigger which prevents accidental use.

catalogue number	volume	pack quantity
062.11.250	250 ml	1 piece
062.11.500	500 ml	1 piece



Extremely fine and homogenious vaporisation is guaranteed with the pull of the trigger.

#### WASH BOTTLES - "integral"

Manufactured from highly translucent polyethylene. Ergonomic shape offers easy grip and easy squeeze during use.

Integral moulded delivery tube delivers the liquid in the bottle untill the last drop.

> Delivery tube guarantees a fine and straight flow with an application of a slight pressure on the body.

catalogue number	volume	pack quantity
062.08.250	250 ml	1 piece
062.08.500	500 ml	1 piece



Dispensing tip provides extra fine stream. The tip of the delivery tube can be cut in order to increase the liquid flow rate.







#### WASH BOTTLES - "narrow neck"

> Manufactured from highly translucent and semi-rigid polyethylene with thick walls and crush-resistant corners.

> Round bottle form allows un-restricted liquid flow-out without leaving any residue at the bottle neck.

> Flexible delivery tube guarantees a fine and straight flow with an application of a slight pressure on the body.

➤ "Goose neck" design of the delivery tube guarantees easy and precise reaching to the flask corners.

 Dispensing tip provides extra fine stream.

Delivery tube tip can be cut to increase the flow rate.

clear bottles	volume	coloured bottles	volume	bottle color	pack quantity
062.05.100	100 ml	062.05.05R	500 ml	red	1 piece
062.05.250	250 ml	062.05.05Y	500 ml	yellow	1 piece
062.05.500	500 ml	062.05.05G	500 ml	green 📃	1 piece
062.05.901	1000 ml	062.05.05B	500 ml	blue	1 piece





#### WASH BOTTLES - "wide neck" - "multi-color cap"


> Manufactured from highly translucent and semi-rigid polyethylene with thick walls and crush-resistant corners.

> Round bottle form allows unrestricted liquid flow out without leaving any residue at the bottle neck.

> Angled delivery tube guarantees a fine and straight flow with an application of a slight pressure on the body.

> Dispensing tube design offers optimum backflow and turbulance free liquid transfer.

> Caps acupled with delivery tube are made from polyethylene with large ridges with increased grip. Cap inner design ensures hermetical and leakproof closure.



Colored caps enables easy identification of the bottle content. Ribbed cap provides perfect grib.

catalogue number	volume	cap color	pack quantity
062.09.05R	500 ml	red	1 piece
062.09.05Y	500 ml	yellow	1 piece
062.09.05G	500 ml	green	1 piece
062.09.05B	500 ml	blue	1 piece

#### WASH BOTTLES - "wide neck" - "multilingual"

Manufactured from highly translucent and semi-rigid polyethylene and polypropylene according to European safety regulations (EC)1272/2008(GHS).

> Angled delivery tube guarantees a fine and straight flow with an application of a slight pressure on the body.

 Dispensing tube design offers turbulance free liquid transfer.

Caps acupled with delivery tube are made from polyethylene with large ridges with increased grip.

 Cap inner design ensures leak-proof closure.

Chemical names, formulas, CAS numbers and other key safety informations are printed on the body surface in 4 (English / French / German and Spanish) languages.



Warning words as "flammable", to identify the the hazardous liquids, "how-to-use" instructions in four languages are printed on the body.

Chemical names, formulas, CAS numbers and pictograms showing the latest changes in regulations are printed on the body.





catalogue number	wash bottle label name	bottle material	bottle volume	cap color	pack quantity
062.50.500	acetone	P.P	500 ml	red	1 piece
062.51.500	water	P.E	500 ml	blue	1 piece
062.51.501	distilled water	P.E	500 ml	blue	1 piece
062.51.502	deionised water	P.E	500 ml	blue	1 piece
062.52.500	ethanol	P.E	500 ml	green	1 piece
062.53.500	ethyl acetate	P.E	500 ml	white	1 piece
062.54.500	iso-propanol	P.E	500 ml	yellow	1 piece
062.55.500	methanol	P.E	500 ml	orange	1 piece
062.56.500	methylethylketone	P.P	500 ml	brown	1 piece
062.57.500	tetrahydrofuran	P.P	500 ml	black	1 piece
062.58.500	toluene	P.E	500 ml	torquise	1 piece



#### JERRYCANS - "polyethylene"

> Manufactured from UV stabilised, thick polyethylene with sturdy carrying handles.

 Featured with a wide neck for easy filling and draining.

> Caps are made from polypropylene with large ridges with increased grip.

> Cap with self-locking internal security ring ensures leak-proof closure.

> 20 and 30 It jerrycans are featured with a leak-proof stopcock which prevents vacuum formation during draining.



Caps are made from polypropylene with large ridges for increased grip.

catalogue number	volume	pack quantity
062.21.902	2 L	1 piece
062.21.903	3 L	1 piece
062.21.905	5 L	1 piece
062.21.910	10 L	1 piece
062.21.920	20 L	1 piece
062.21.930	30 L	1 piece



#### CARBOYS - "aspirator bottles" - "with stopcock" - "polypropylene"

- Manufactured from UV stabilised, thick polypropylene with sturdy carrying handles.
- Featured with a wide neck for easy filling and draining.

> Caps are made from polypropylene with large ridges with increased grip. Cap ensures leak-proof closure.

> Featured with a leak-proof stopcock.



Caps are made from polypropylene with large ridges with increased grip.



Featured with a leakproof stopcock which prevents vacuum formation during draining.

catalogue number	volume	carboy Ø	carboy H	cap Ø	pack quantity
062.28.905	5 L	170 mm	345 mm	55 mm	1 piece
062.28.910	10 L	200 mm	455 mm	55 mm	1 piece
062.28.920	20 L	265 mm	550 mm	55 mm	1 piece



#### BOTTLES - "aspirator" - "with stopcock" - "glass"

Manufactured from heat resistant, durable borosilicate glass with thick wall, heavy base and reinforced rim.

> Featured with a wide neck for easy filling and draining.

> Caps are made from polypropylene with large ridges with increased grip.

> Cap inner design ensures leak-proof closure.

Featured with a leak-proof stopcock.



Fe sto

Featured with a leak-proof stopcock which prevents vacuum formation during

Caps are made from polypropylene with large ridges with increased

catalogue number	volume	pack quantity
062.27.905	5 L	1 piece
062.27.910	10 L	1 piece
062.27.920	20 L	1 piece

grip.

draining.

# BOTTLES - "dropping"



Manufactured from transparent polyethylene with a dropping cap. Cap can be easily dismantled for cleaning.

> Dispensing tip provides similar size drops at all times. Supplied with a push-to-open cap for safety reasons.

catalogue number	volume	pack quantity
062.10.010	10 ml	10 pieces
062.10.015	15 ml	10 pieces
062.10.020	20 ml	10 pieces
062.10.030	30 ml	10 pieces

#### BOTTLES - "dropping"



*clear amber pack bottles bottles volume quantity 062.02.100 062.03.100 100 ml 1 piece* 

Manufactured from heat resistant, durable borosilicate glass with a glass dropping cap.

 Dispensing tip provides similar size drops at all times.

> Amber bottles prevent UV lights to penetrate into the bottle.

# BOTTLES - "dropping"



clear bottles	amber bottles	volume	pack quantity
062.12.050	062.13.050	50 ml	1 piece
062.12.100	062.13.100	100 ml	1 piece

► Manufactured from heat resistant, durable borosilicate glass with a rubber dropping cap. Cap can be easily dismantled for cleaning.

- > Dispensing tip provides similar size drops at all times.
- Amber bottles prevent UV lights to penetrate into the bottle.

## BOTTLES - "dropping"



clear	amber	volume	pack
bottles	bottles		quantity
062.04.100	062.04.101	100 ml	1 piece



Manufactured from transparent polyethylene with a dropping cap. Cap can be easily dismantled for cleaning.

> Dispensing tip provides similar size drops at all times. The dispensing tip can be cut to increase the drop volume

> Amber bottles prevent UV lights to penetrate into the bottle.









#### CARRIERS - "for bottles"

Manufactured from epoxy coated steel wire for safe transportation of 500 ml, 1 lt and 2,5 lt standard chemical bottles.

 Easy to grab sturdy handle offers perfect balance and comfort during use.

catalogue number	for bottle max. dia.	bottle array	pack quantity
062.66.500	100 mm	6 x 500 ml	1 piece
062.66.901	105 mm	4 x 1000 ml	1 piece
062.66.902	140 mm	2 x 2500 ml	1 piece







#### **TRANSPORT BOX**

> Manufactured from polypropylene for storing and transporting small size products.

Clasping lid ensures safe closure and guarantees the interior being not effected by dust, humidity and other environmental conditions.

> The clarity of the box enables the user to visibly check the sample integrity and use the box safely.

Carry handle folds neatly allowing the boxes can be stacked on each other.

The lid can open fully 180° offering easy access to the contents and easy cleaning of interior.

catalogue number

062.66.004



#### **BASKET - "for bottles"**

> Manufactured from ABS for safe and convenient transportation up to 6 wash bottles.


Although highly recommended for 500 ml bottles can also carry 250 ml bottles.

Strong, light weight body construction and ergonomic handle offer both comfort and control.

> Easily stackable due to the tapered body form for reducing storage space.

catalogue	for bottle	pack
number	max. diameter	quantity
062.66.001	90 mm	

BOX - "with compartments" - "acrylic"



> Manufactured from acrylic featured with different size compartments.

 Offers practical positioning of different size small objects such as magnetic stirrers.

The long compartment is ideal to store longer objects including magnetic bar retrievers.

Featured with a lid protecting the box interior.

compartment catalogue number pack box vidtl box box paci ength lantity guantit quantit 057.02.101 330 mm 110 mm 35 mm 12 1 piece 1 piece

with excellent field of vision.

safe access to partiations.

from enviromental effects.

others.

**DISPENSER BOXES** 

Manufactured from crystal clear acrylic

> Generous openings provide easy and

> Covers are featured with easy opening hinged lids. Once opened, the lid stands

> Their flip-top covers guarantee safe and clean storage without been effacted

Featured with non-skid silicone feet for safe and stable stand on the desks.

open and enables easy handling.

Ideal assistants for storing and dispensing small sized products such as pipette tips, tubes, vials and many



catalogue number	specifications	external dimensions	pack quantity
006.15.001	1 compartment	175 x 250 x 330 mm	1 piece
006.15.002	2 compartments	175 x 250 x 330 mm	1 piece
006.15.003	3 compartments	265 x 250 x 330 mm	1 piece





#### BOXES - "double opening"

➤ Manufactured from polypropylene for storing and transporting all products including food stuff.

Clasping lid ensures safe closure and guarantees the interior being not effected by dust, humidity and other environmental conditions.

> The clarity of the box enables the user to visibly check the sample integrity and safe use of the box safely.

► Easily stackable due to the tapered body form for reducing storage space.

➤ The lid can open fully 180° with two steps offering easy access to the contents and easy cleaning of interior.



catalogue number	dimensions (mm)	box volume	pack quantity
062.39.900	95 x 150 x 75	0,75 L	1 piece
062.39.901	125 x 185 x 65	1,00 L	1 piece
062.39.902	125 x 185 x 90	1,50 L	1 piece
062.39.903	155 x 230 x 110	3,00 L	1 piece
062.39.905	200 x 280 x 125	5,00 L	1 piece
062.39.907	255 x 355 x 122	7,50 L	1 piece
062.39.910	250 x 345 x 150	10,00 L	1 piece
062.39.913	255 x 355 x 200	13,00 L	1 piece

#### BOXES - "click lock lid"

Manufactured from polypropylene for easy and safe storage of most products.

 "Click-lock" system enables safe closure and easy opening of the box lid.


> The clarity of the box enables the user to visibly check the sample integrity and safe use of the box.

> Easily stackable due to the tapered body form for reducing storage space.

catalogue number	dimensions (mm) v	box volume d	pack quantity
062.36.910	385 x 260 x 155	10 L	1 piece
062.36.920	460 x 320 x 180	20 L	1 piece
062.36.930	510 x 355 x 230	30 L	1 piece



1

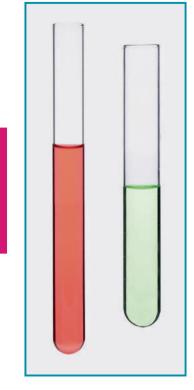


#### **TEST TUBES - "glass"**

> Manufactured by automated machines with consistent length and thickness.

> Due to the properties of borosilicate glass highly recommended for over heated applications.

tube dimensions	neutral glass test tubes	borosilicate glass tubes	pack quantity
6 x 40 mm	077.01.000		100 pieces
10 x 75 mm	077.01.001	077.02.001	100 pieces
12 x 75 mm	077.01.021		100 pieces
12 x 100 mm	077.01.002	077.02.002	100 pieces
13 x 100 mm	077.01.003	077.02.003	100 pieces
13 x 130 mm	077.01.031		100 pieces
16 x 100 mm	077.01.004	077.02.004	100 pieces
16 x 160 mm	077.01.005	077.02.005	100 pieces
18 x 180 mm	077.01.006	077.02.006	100 pieces
20 x 200 mm	077.01.007		100 pieces
20 x 220 mm	077.01.008		100 pieces



#### TEST TUBES - "P.P or P.S"

> Manufactured from clear polypropylene or from polystyrene for disposable use.


P.S tubes	P.P tubes	tube dimensions	bottom form	pack quantity
077.04.001	077.04.002	12x75 mm	round	1000 pieces
077.04.003	077.04.004	16x100 mm	round	500 pieces
077.04.005	077.04.006	16x100 mm	conical	500 pieces

#### CENTRIFUGE TUBES - "glass"

Manufactured from neutral glass with wall thickness 1,0 - 1,1 mm.

➤ Nominal capacity is approximately 15 ml. They stand up to 3.500 RCF and guarantee problem free centrifugation.

tube centrifuge	tube dimensions	product specifications	pack quantity
078.01.001	16x100 mm	non-graduated	100 pieces
078.01.002	16x100 mm	graduated	10 pieces

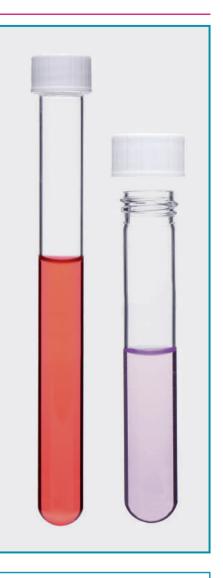

#### TEST TUBES "glass" - "with screw cap"

> Manufactured from neutral glass featured with a polypropylene screw cap.

 Hermetic caps guarantee absolute leak-proof closure.


> Specially recommended for tissue culture or other similar applications.

> Tubes and caps are delivered in separate packings.

catalogue number	tube dimensions	pack quantity
077.03.001	16x100 mm	100 pieces
077.03.002	16x160 mm	100 pieces



Various beaker tongs can be selected from catalogue page no 69.



#### TUBE RACKS - "epoxy coated steel"




> They offer ideal solutions with square tube holes, reinforced edges and slotted bottom design or secure handling.

> Manufactured from high quality steel wire, welded and coated with heat cured blue epoxy.


> The epoxy coating is absolutely corrosion proof and can resist to salts, moderate acids, moderate alkalis and organic solvents.

Ideal for autoclaving. Can resists from -200°C to +121°C.



Square tube holes and slotted bottom design guarantees firm hold of the tubes at exact positions.

catalogue number	for tubes	well quantity	tube array	rack L x W x H	pack quantity
079.01.101	13 mm	84	6 x 14	100x231x68 mm	1 piece
079.01.102	16 mm	55	5 x 11	118x260x74 mm	1 piece
079.01.103	18 mm	55	5 x 11	110x235x75 mm	1 piece
079.01.104	20 mm	40	4 x 10	100x235x70 mm	1 piece
079.01.105	25 mm	32	4 x 8	116x230x93 mm	1 piece
079.01.106	30 mm	21	3 x 7	110x260x95 mm	1 piece
079.01.100	30 //////	21	3 % /	110x200x9511111	i piece

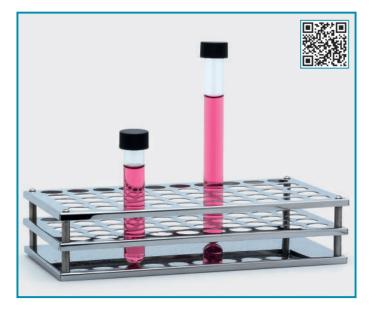

#### TUBE RACKS - "with silicone grips"



Manufactured from modified ABS which enables the racks to be used in water baths without floating.

> Bottom of each tube compartment is featured with a silicone grip that firmly holds the tubes in position without waggle.

> Tubes can be inserted and extracted with a gentle push or pull.



#### PUSH & EJECT function

Just simply press upwards the bottom layer of the tube rack by two hands. The eject mechanism automatically releases the tubes from their positions simultaneously and immediately.



#### SILICONE GRIP function

Bottom of each tube compartment is featured with a silicone grip that firmly holds the tubes in position without waggle.

catalogue	tube	tube	tube	pack
number	diameter	qty	array	quantity
079.11.016	15/16 mm	50	5x10	1 piece

#### TUBE RACKS - "st. steel"

Manufactured from high quality, chemical and corrosion resistant AISI 304 grade stainless steel.

Robust and seamless construction guarantees long life cycle. Smooth polished surface provides fast and easy cleaning.

> Offers a very long life cycle due to the very robust construction.

Perfect design of the tube holes firmly keeps the tubes at their position.

catalogue number	tube diameter	tube quantity	tube array	pack quantity
079.02.001	13 mm	50	5x10	1 piece
079.02.002	16 mm	50	5x10	1 piece
079.02.003	18 mm	40	4x10	1 piece

#### TUBE RACKS - "polypropylene" - "dismantled"



Manufactured from modified polypropylene which enables the racks to be used in water baths without floating.

Guarantees temperature resistance between -20°C to +121°C.


> 4 different color options offer visual sorting and organising of different samples.

> The alpha numeric grid reference on the top tier of the rack ensures an easy tube location and sample positioning.

> Racks are supplied dismantled for reducing storage area.

Racks can be easily assambled less than half a minute with the help of supplied instruction manuel.

item no	for tubes	well quantity	tube array	rack L x W x H	white racks catalogue no	blue racks _ catalogue no _	red racks catalogue no	orange racks catalogue no	pack quantity
1	13 mm	84	6 x 14	125x265x70 mm	079.01.001W	079.01.001B	079.01.001R	079.01.0010	1 piece
2	16 mm	55	5 x 11	125x265x70 mm	079.01.002W	079.01.002B	079.01.002R	079.01.0020	1 piece
3	18 mm	55	5 x 11	125x265x70 mm	079.01.003W	079.01.003B	079.01.003R	079.01.0030	1 piece
4	20 mm	40	4 x 10	125x265x70 mm	079.01.004W	079.01.004B	079.01.004R	079.01.0040	1 piece
5	25 mm	32	4 x 8	125x265x90 mm	079.01.005W	079.01.005B	079.01.005R	079.01.0050	1 piece
6	30 mm	21	3 x 7	125x265x90 mm	079.01.006W	079.01.006B	079.01.006R	079.01.0060	1 piece

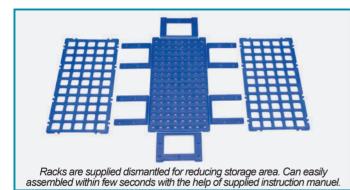





4 different color options of the stands offer visual sorting and organising of different samples.

#### TUBE RACK - "4 sides"

Manufactured from modified polypropylene which enables the racks to be used in water baths without floating.

- 4 sides offer 4 different tube holding alternative.
  - > Side 1: holds 4 x 30 mm dia. tube with 2 x 2 array
  - Side 2: holds 32 x 12 mm dia. tube with 4 x 8 array
    Side 3: holds 12 x 17 mm dia. tube with 2 x 6 array

  - Side 4: holds 96 x 7 mm dia. tube with 8 x 12 array

> Racks are designed with an interlocking system for connection to each other in order to form multi rack rows.

Alphanumerical index on tube rows enables easy identification of tube positions.

catalogue number	tube diameter	tube volume	tube quantity	tube array	pack quantity
080.01.001	30 mm	50 ml	4	2 x 2	1 piece
	12 mm		32	4 x 8	
	17 mm	15 ml	12	2 x 6	
	7 mm		96	8 x 12	

#### TUBE RACKS - "polypropylene" - "foldable"



Manufactured from modified polypropylene which enables the racks to be used in water baths without floating.

Guarantees temperature resistance between -20°C to +121°C.

> 4 different color options offer visual sorting and organising of different samples.

> Raised tube sockets guarantee firm hold of the tubes at their exact positions.

> The alpha numeric grid reference on the top tier of the rack ensures an easy tube location and sample positioning.

> Racks are supplied assembled and folded. Can be ready for use in few seconds with a simple action.

> These racks can be folded after use for reducing storage area.

for tubes	well quantity	tube array	rack L x W x H	white racks catalogue no	blue racks _ catalogue no _	red racks catalogue no	orange racks catalogue no	pack quantity
13 mm	50	5 x 10	160x275x70 mm	079.03.001W	079.03.001B	079.03.001R	079.03.0010	1 piece
16 mm	50	5 x 10	160x275x70 mm	079.03.002W	079.03.002B	079.03.002R	079.03.0020	1 piece
18 mm	50	5 x 10	160x275x70 mm	079.03.003W	079.03.003B	079.03.003R	079.03.0030	1 piece
20 mm	45	5x9	160x275x70 mm	079.03.004W	079.03.004B	079.03.004R	079.03.0040	1 piece
30 mm	26	4 x 6/7	160x275x70 mm	079.03.005W	079.03.005B	079.03.005R	079.03.0050	1 piece






Raised tube sockets guarantee firm hold of the tubes at their exact positions.



Supplied assembled and folded. Can be ready for use in few seconds with a simple action.







Place the rack on a flat surface and push the side supports inwards.



Press on 4 corners and click the upper part to locking position.





#### STANDS - "rectangular"

> Highly stable rectangular base is manufactured from enamel coated sheet steel.

> Silicone feet placed under the base prevents the stand from sliding.

Supplied without rods. Kindly select the suitable rod from below table.

catalogue number	dimensions	pack quantity
049.01.130	130 x 210 mm	1 piece
049.01.150	150 x 300 mm	1 piece
049.01.200	200 x 315 mm	1 piece

#### SUPPORT RODS

> Manufactured either from galvanised steel or stainless steel with a M10 thread.

galvanised steel	rod length	rod diameter	pack quantity
049.06.004	600 mm	12 mm	1 piece
049.06.005	750 mm	12 mm	1 piece
049.06.006	1000 mm	12 mm	1 piece
049.00.000	1000 11111	1211111	i piec

stainless steel	rod length	rod diameter	pack quantity
049.07.004	600 mm	12 mm	1 piece
049.07.005	750 mm	12 mm	1 piece
049.07.006	1000 mm	12 mm	1 piece


#### STANDS - "triangle"

> Highly stable triangle base is manufactured from enamel coated sheet steel.

Silicone feet placed under the base prevents the stand from sliding.

Supplied without rods. Kindly select the suitable rod from below table.

catalogue number	foot length	base thickness	pack quantity
049.03.115	115 mm	8 mm	1 piece
049.03.150	150 mm	8 mm	1 piece

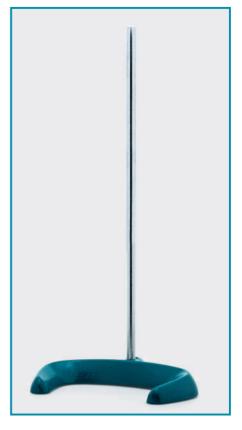

#### STANDS - "horse shoe"


> The most strudy stand type.

 Extremely stable horse shoe base is manufactured from enamel coated cast steel.

> Highly recommended for various applications such as titration, assembly of stirrers etc. Supplied with rods.

catalogue number	size	rod dia.	rod height d	pack quantity
049.09.180	small	12 mm	600 mm	1 piece
049.09.250	medium	14 mm	700 mm	1 piece
049.09.320	large	16 mm	800 mm	1 piece





#### **WIRE GAUZES**

 Manufactured from galvanised steel with a ceramic circular plate at the center.

catalogue	wire gauze	pack
number	dimensions	quantity
050.06.001	150x150 mm	1 piece



#### STANDS - "ABS"

 Highly stable rectangular base is manufactured from ABS.


 Base with dimensions 175x300 mm has two rod holding holes.

> Same rod can be placed either at the center or at the rear of the base offering multi advantages.

> White base color guarantees perfect visual observation of color changes during titration applications.

> Delivered complete with a screwin galvanized support rod of 600 mm height.

catalogue	base	base	pack
number	width	length	quantity
049.04.175	175 mm	300 mm	1 piece

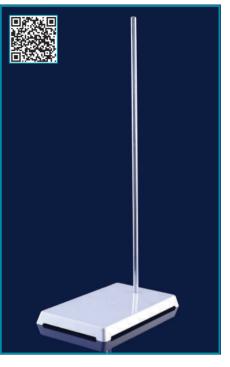




#### LABORATORY JACKS

> Table and base plate are manufactured from anodized aluminium. Scissors are made from stainless steel.

 Large control knob enables smooth and continuous control of table height.

catalogue number	plate width	plate length	pack quantity
050.05.150	150 mm	150 mm	1 piece
050.05.200	200 mm	200 mm	1 piece





#### TRIPOD - "fix height"

> Manufactured from chrome plated steel.

➤ Holding ring with 125 mm diameter offers practical use with all sizes of ceramic triangles and wire gauzes.

catalogue	fix	pack
number	height	quantity
050.04.001	200 mm	1 piece

#### **CERAMIC TRIANGLES**

 Consists of ceramic pipes around galvenised steel wire.

catalogue number	ceramic cylinder dimension	pack quantity
050.07.050	50 mm	1 piece
050.07.060	60 mm	1 piece



150 mm standard diameter of circular ring can be reduced to 125 mm with the help of supplied reducement ring.

#### TRIPOD - "adjustable height"

> Manufactured from chrome plated steel. Height can be adjustable from 200 mm to 300 mm.

► Holding ring with 150 mm diameter can be reduced to 125 mm with the supplied reducement attachment.

catalogue	pack
number	quantity
050.04.002	1 piece



CLAMP - "2 jaws" - "without bosshead"

Manufactured from high quality, corrosion resistant chromated steel holding for various objects in the most secure way.

> PVC coated insulated jaws guarantee perfect heat insulation. Soft and elastic coating holds the glassware gently and prevent possible breakage.

Individually adjustable clamps guarantee perfect and precise control of holding pressure and holding position.

Clamps can be opened and closed smoothly with a 50 mm grip diameter.

catalogue	pack
number	quantity
045.01.001	1 piece



#### CLAMP - "3 jaws" - "without bosshead"

> Manufactured from high quality, corrosion resistant chromated steel holding for various objects in the most secure way.

> PVC coated insulated jaws guarantee perfect heat insulation. Soft and elastic coating holds the glassware gently and prevent possible breakage.

Individually adjustable clamps guarantee perfect and precise control of holding pressure and holding position.

Clamps can be opened and closed smoothly with a 70 mm grip diameter. catalogue pack number quantity 045.03.001 1 piece





CLAMP - "2 jaws" - "with bosshead"

Manufactured from high quality, corrosion resistant chromated steel holding for various objects in the most secure way.

➤ Featured with a swivel bosshead which provides 360° swivel of the clamped object around their axis. Bosshead locking feature guarantees perfect position hold of the clamped objects. Adjustable clamps guarantee perfect pressure control.

PVC coated insulated jaws guarantee perfect heat insulation. Soft coating holds the glassware gently and prevent breakage.

Clamps can be opened and	catalogue	pack
closed smoothly with a 50	number	quantity
mm grip diameter.	045.04.001	1 piece



CLAMP - "3 jaws" - "with bosshead"

Manufactured from high quality, corrosion resistant chromated steel holding for various objects in the most secure way.

➤ Featured with a swivel bosshead which provides 360° swivel of the clamped object around their axis. Bosshead locking feature guarantees perfect position hold of the clamped objects. Adjustable clamps guarantee perfect pressure control.

PVC coated insulated jaws guarantee perfect heat insulation. Soft coating holds the glassware gently and prevent breakage.

Clamps can be opened and closed smoothly with a 70 mm grip diameter.

catalogue	pack
number	quantity
045.06.001	1 piece

#### CLAMP - "for frame work"

Manufactured from high quality, corrosion resistant chromated steel.

Ideal for frame works and fixing perpendiculars.

Clamps can be opened and closed smoothly by a screw thread with a 12 mm grip diameter.

catalogue	pack
number	quantity
046.07.001	1 piece




catalogue number

060.04.001

pack puantitv

1 piece

CLAMP - "for thermometers"

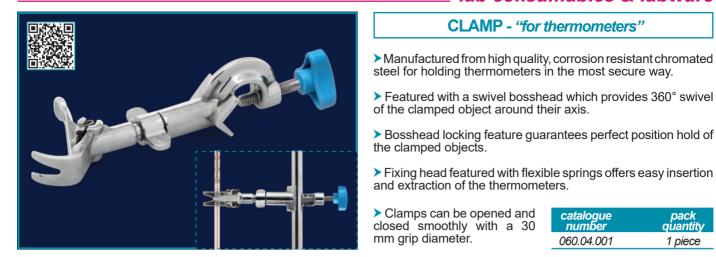



#### BOSSHEAD - "standard" - "fix position"

Manufactured from high quality, corrosion resistant chromated steel for holding rods in the most secure way.

> Holds the objects on a fixed position.

closed smoothly with a 23 mm grip diameter.

> Clamps can be opened and

catalogue number pack quantity 046.01.001 1 piece

Manufactured from high > quality, corrosion resistant chromated steel for holding rods in the most secure way.

> Holds the objects on a fixed position.

> Clamps can be oper	ned	and
closed smoothly with	n a	17
mm grip diameter.		

catalogue	pack
number	quantity
046.05.001	1 piece



#### BOSSHEAD - "heavy duty" - "fix position"

Manufactured from high quality, corrosion resistant powder coated steel for holding rods in the most secure way.

Holds the objects on a fixed position.

> Sturdy construction guarantees the use with heavy objects.

Clamps can be opened and closed smoothly with a 23 mm grip diameter.

catalogue	pack
number	quantity
046.05.002	1 piece



BOSSHEAD - "heavy duty" - "fix position"

#### BOSSHEAD - "standard" - "swivel head"

> Manufactured from high quality, corrosion resistant chromated steel for holding rods in the most secure way.

> Featured with a swivel bosshead which provides 360° swivel of the clamped object around their axis.

Bosshead locking feature guarantees perfect position hold of the clamped objects.

> Clamps can be opened and closed smoothly with a 25 mm grip diameter.

catalogue	pack
number	quantity
046.01.002	1 piece



TONGS - "flat jaws"

#### TONGS - "rod jaws"

Manufactured from high quality, corrosion resistant chromated steel for holding erlenmeyers and flasks in the most secure way.

 PVC coated insulated jaws guarantees perfect heat insulation. > Soft and elastic coating holds the glassware gently and prevent possible breakage.


catalogue number	pos. no	pack quantity
029.03.001	1	1 piece
026.03.001	2	1 piece

#### TONGS - "for evaporating dishes"

 Manufactured from high quality, chromated steel.

> Unique design with grabbing jaws enables safe holding of dishes.

catalogue	total	pack
number	length	quantity
038.05.001	280 mm	1 piece



 PVC coated insulated jaws guarantees perfect heat insulation.  Soft and elastic coating holds the glassware gently and prevent possible breakage.

pos. no	pack quantity
1	1 piece
2	1 piece
	<b>no</b> 1



#### TONGS - "for crucibles"

 Manufactured from high quality, chromated steel for holding crucibles.

catalogue number	total length	pack quantity
038.06.250	250 mm	1 piece
038.06.300	300 mm	1 piece
038.06.400	400 mm	1 piece

 Unique design with grabbing jaws enables safe holding of crucibles.



#### CLAMP - "for tubes" - "steel"

Manufactured from chromated steel for holding tubes in the most secure way.

> Featured with a steel spring and a finger for tight and firm holding of the tubes. > Long handling arm avoids close contact of the fingers to the flame.

cataloguetotalpacknumberlengthquantity080.04.002150 mm1 piece



#### CLAMP - "for tubes" - "wood"

Manufactured from hardened wood for holding tubes in the most secure way.

Featured with a steel spring for tight and firm holding of the tubes.  Long handling arm avoids close contact of the fingers to the flame.

catalogue	total	pack
number	length	quantity
080.04.001	180 mm	1 piece

047.10.200 200 mm

047.10.300 300 mm

1 piece

1 piece



047.09.180 180 mm

047.09.210 210 mm

and a straight/flat spatula at


the other end.

1 piece

1 piece

end and a wooden handle at

the other end.



#### SPATULAS - "in a wallet"


A practical set of 6 most common and frequently used spatulas all manufactured from high quality, chemical and corrosion resistant AISI 304 grade stainless steel.

Set consists of one of each micro spoon / curved and ground/ chattaway spatula with all 180 mm length and dissecting forcep / blunt - sharp scissors with 160 mm length.

➤ All spatulas are placed into suitable holding pockets of the wallet that keeps the spatulas away from disorder and exterior effects.

anna anoooonnig	iereep / iereire
spatula set	pack quantity
047.05.001	1 piece
empty wallet	pack quantity
047.05.002	1 piece

SCOOPS - "polypropylene" - "self standing"

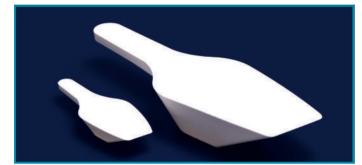

> Manufactured from high quality polypropylene which resists to most acids, bases and many commonly used solvents.

 Guarantees excellent temperature resistance between -20°C to +121°C.

> Perfect shape and size enable efficient sampling of various powder, granulate and paste form samples.


> 9 volume sizes from 2 ml to 1000 ml offer an wide sampling option from smallest to largest sample volume.

> Due to their flat bottom construction these scoops can stand horizontal on the flat surfaces and can also be used as a weighing pan.


> With the help of precision formed sharp edge they offer best performance while picking up samples even from wet surfaces.



Featured with easy to grip handles for comfortable use. Approximate volume values are printed on the handles.



The indicated volumes are estimated volumes.

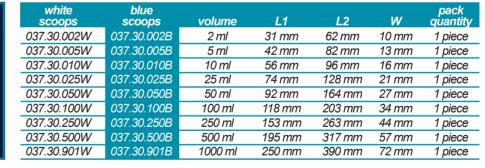



Due to their flat bottom construction these scoops can stand horizontal on a flat surface and can also be used as a weighing pan.



Same size scoops are easily stackable for reducing storage space. Different color options offer easy visual sorting.



With the help of precision formed sharp edge they offer best performance while picking up samples even from wet surfaces.

#### SCOOPS - "polystyrene" - "self standing" - "with & without lid"







➤ Manufactured from high quality polystyrene which resists to most acids, bases and many commonly used solvents. Guarantees temperature resistance between -10°C to +70°C.

> Perfect shape and size enable efficient sampling of various powder, granulate and paste form samples.

6 volume sizes from 25 ml to 500 ml offer an wide sampling option from smallest to largest sample volume.

> Due to their flat bottom and slightly inclined handle construction these scoops stand horizontal on the flat surfaces and can also be used as weighing pans.

> Easy to grip and long handle increases the distance between the hand and the sample to reduce cross contamination risks and also offers comfortable use.

> Approximate volume values are printed on the handles.


# Alternative 2 scoops: Gamma sterile scoops

> Sterile scoops are manufactured at aseptically sterile production halls and then send to gamma sterilisation. Such informations as lot number, production and expiry dates etc are indicated on the packing.

> Sterile scoops are manufactured as single use. They eliminate the cost of separate sterile bags or containers in sample collection process.

> Sterile scoops are featured with a press-on, transparent lid which enables easy identification of sample and protects the samples from dust, moisture and other environmental effects.

> The transparent lid should be closed immediately after the sampling procedure to secure a sterile and contemination-free sample. Lid is featured with a frosted write on area.



non-sterile white scoops	non-sterile blue scoops	gamma sterile whit scoops with lid	e volume	L1	L2	w	pack quantity
037.35.025W	037.35.025B	037.36.025W	25 ml	57 mm	137 mm	30 mm	1 piece
037.35.050W	037.35.050B	037.36.050W	50 ml	68 mm	158 mm	33 mm	1 piece
037.35.100W	037.35.100B	037.36.100W	100 ml	96 mm	200 mm	38 mm	1 piece
037.35.150W	037.35.150B	037.36.150W	150 ml	107 mm	215 mm	41 mm	1 piece
037.35.250W	037.35.250B	037.36.250W	250 ml	127 mm	243 mm	50 mm	1 piece
037.35.500W	037.35.500B	037.36.500W	500 ml	162 mm	292 mm	65 mm	1 piece



Precision formed sharp edge offers best performance while picking up samples even from wet surfaces.






Flat bottom and slightly inclined handle construction offer horizontal stand on the flat surfaces.





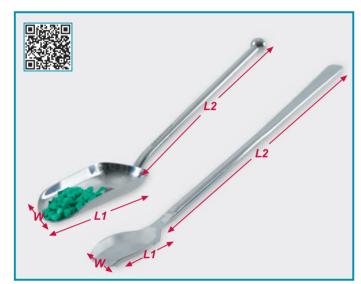

#### SCOOPS - "stainless steel"

> Manufactured from high quality, AISI 304 stainless steel.

Suitable for spooning medium and large size products. Featured with a round formed spoon at one end and a steel handle at the other end.

> Robust and seamless construction guarantees long life cycle. Smooth polished surfaces provide easy cleaning.

catalogue number	scoop (Ø) W	scoop L1	handle L2	pack quantity
037.08.050	50 mm	96 mm	92 mm	1 piece
037.08.075	75 mm	145 mm	100 mm	1 piece
037.08.100	100 mm	203 mm	102 mm	1 piece
037.08.120	120 mm	230 mm	105 mm	1 piece

#### SCOOP & SPOON - "stainless steel"

Manufactured from high quality, chemical and corrosion resistant AISI 304 grade stainless steel.

> Suitable for spooning small to medium size products. Featured with a round formed spoon at one end and a handle at the other end.

> Robust and seamless construction guarantees long life cycle.

Smooth polished surfaces provide fast and easy cleaning.

scoop cat. no.	scoop (Ø) W	scoop L1	handle L2	pack quantity
047.18.002	21 mm	63 mm	140 mm	1 piece
spoon cat. no.	scoop (Ø) W	scoop L1	handle L2	pack quantity
047.18.001	11 mm	30 mm	160 mm	1 piece



#### SPOONS - "polystyrene" - "sterile"

> Manufactured from high quality polystyrene as single use.

Resists to most acids, bases and many commonly used solvents. Guarantees temperature resistance between -10°C to +70°C.

Sterile spoons are "DNase, RNase and pyrogen-free" since sterilised by gamma irradiation after production step. Individually single packed with lot number, production date and expiry date printed on the package.

Approximate volume values are printed on the handles.

Perfect shape and size enable efficient sampling of various powder, granulate and paste form samples.

Easy to grip and long handle increases the distance between the hand and the sample to reduce cross contamination risks.

catalogue number	spoon s volume	scoop (Ø) W	spoon L1	handle L2	pack quantity
037.36.002	2,5 ml	22 mm	36 mm	54 mm	1 piece
037.36.010	10 ml	31 mm	56 mm	110 mm	1 piece

#### SPATULAS - "polypropylene" - "macro spoon"





> Manufactured from high quality flexible polypropylene.


Most commonly used spatula. Featured with a macro spoon form for small, medium and large size particles at one end and a straight/flat spatula form at the other end.

Robust and seamless construction guarantees long life cycle. Smooth polished surfaces provide fast and easy cleaning.

Also offers practical solutions for mixing and stirring solutions manuelly by hand.

> Flat end has 35 degree sharp edges for easy removal of the residues on flat surfaces.








Sharp blade penetrates directly into paper or plastic bags for optimum and quick sampling process.

Spatulas are featured with a lid hich protects the samples from dust, moisture and other effects.




> Flexible body form offers best sampling and collecting.

# Alternative 2 spatulas: Mon-sterile spatulas Gamma sterile spatulas

Gamma sterilised sterile spatulas carry such informations as lot number, production and expiry dates etc on the packing.

total length	non-sterile spatulas	gamma sterile spatulas	pack quantity
150 mm	047.32.150	047.33.150	1 piece
180 mm	047.32.180	047.33.180	1 piece
210 mm	047.32.210	047.33.210	1 piece



# SPATULAS - "sterile" - "with lid" - "polystyrene"

➤ Manufactured from high quality polystyrene which resists to most acids, bases and many commonly used solvents. Guarantees temperature resistance between -10°C to +70°C.

> Gamma sterile spatulas are manufactured as single use. They eliminate the cost of seperate sterile bags or containers in sample collection.

Perfect shape and size enable efficient sampling of various powder, granulate and paste form samples.

Sharp blade penetrates directly into paper or plastic bags for optimum and quick sampling process.

Easy to grip and long handle increases the distance between the hand and the sample to reduce cross contamination risks.

> Approximate volume values are printed on scoop handles.

> Sterile spatulas are featured with a transparent lid which protects the samples from dust, moisture and other effects.

> The transparent lid should be closed immediately after the sampling to secure a sterile and contemination-free sample.

> Lid is featured with a frosted write on area for practical use.


catalogue	spatula (Ø)	spatula	handle	pack
number	W	L1	L2	quantity
037.36.001	13 mm	150 mm	110 mm	



#### FORCEPS - "general use"

Manufactured from AISI 304 grade stainless steel. Most commonly used forceps. Featured with a blunt point tip without jaw.

catalogue number	total length	pack quantity
048.01.105	105 mm	1 piece
048.01.115	115 mm	1 piece
048.01.130	130 mm	1 piece
048.01.145	145 mm	1 piece
048.01.160	160 mm	1 piece
048.01.200	200 mm	1 piece
048.01.250	250 mm	1 piece
048.01.300	300 mm	1 piece



#### FORCEPS - "with tooth"

> Manufactured from AISI 304 grade stainless steel. Featured with a blunt point tip with a 1:2 array jaws for much effective and forced grasping.

catalogue number	total length	pack quantity
048.02.115	115 mm	1 piece
048.02.130	130 mm	1 piece
048.02.145	145 mm	1 piece
048.02.160	160 mm	1 piece



#### FORCEPS - "non-sterile"

> Manufactured from high quality, chemical and corrosion resistant ABS. Fine sharp tips and straight body form offer multiple advantages.



FORCEPS - "general use" - "sterile"

catalogue	total	pack
number	length	quantity
048.10.110	110 mm	10 pieces



# Manufactured under germ-free gamma sterile conditions with extreme sterility control from ABS. Certified as "DNase, RNase and pyrogen-free since sterilised by gamma irradiation after production step. Individually single packed with lot number, production date and expiry date printed

on the package.

catalogue	total	pack
number	length	quantity
048.11.110	110 mm	1 piece

#### FORCEPS - "dissecting use"

Manufactured from AISI 304 grade stainless steel. Most commonly used forceps for dissecting.

> Featured either with an straight fine sharp point tip or with curved inclined fine sharp point tip.

forceps with straight tip	forceps with curved tip	total length	pack quantity
048.07.105	048.08.105	105 mm	1 piece
048.07.115	048.08.115	115 mm	1 piece
048.07.130	048.08.130	130 mm	1 piece
048.07.150		150 mm	1 piece
048.07.160		160 mm	1 piece
048.07.200		200 mm	1 piece

#### FORCEPS - "for cover glasses"

- Manufactured from AISI 304 grade stainless steel. Most commonly used forceps for handling cover glasses.
- > Featured either with a flat inclined tip or with a flat straight tip.

forceps with	forceps with straight tip	total	pack
inclined tip		length	quantity
048.03.001	048.03.002	105 mm	1 piece







059



#### SCISSORS - "general use" - "sharp tip" & "blunt tip" & "blunt/sharp tip"

> Manufactured from AISI 304 grade stainless steel with straight form. Most commonly used scissors.

> Robust and seamless construction guarantees long life cycle.

total length	scissors sharp tip	scissors blunt tip	scissors blunt / sharp tip	pack quantity
130 mm	048.22.130	048.23.130	048.24.130	1 piece
160 mm	048.22.160	048.23.160	048.24.160	1 piece

SCISSORS - "dissecting use"

➤ Manufactured from AISI 304 grade stainless steel. Most commonly used scissors for dissecting.

► Featured either with a straight and fine sharp point tip or curved and fine sharp point tip.

scissor scissor total pack straight tip curved tip length quantity 048.25.130 048.26.130 130 mm 1 piece



## SCISSORS - "general use"

Scissor part manufactured from high quality steel. Commonly used scissors for general applications. Featured with a straight and fine sharp point tips.

catalogue number	total length	pack quantity
048.30.130	130 mm	1 piece
048.30.160	160 mm	1 piece
048.30.200	200 mm	1 piece



SCISSORS - "heavy duty"

Scissor part manufactured from high quality steel. Most commonly used scissor for cutting all materials even thin layer of metal sheets.

 Spring supported ergonomic plastic handle with safety lock offers easy, fast and safe use.

catalogue	total	pack
number	length	quantity
048.31.001	185 mm	1 piece



#### CUTTERS

> Can be used as a cutter, as a safety knife suitable for detailed precise cutting. Both models are featured with both a break-off device.

 Large cutter is also featured with an auto-lock knob as additional safety. ► Light weight and ergonomic handle offers excellent grip option.

catalogue number	blade length	blade width	pack quantity
048.06.001	80 mm	9 <i>mm</i>	1 piece
048.06.002	100 mm	18 mm	1 piece

#### SCALPEL - "with safety cover"

> Single packed sterile scalpel featured with highest grade stainless steel cutting blade.

> Handle is manufactured from polypropylene with a soft grip option.

> The safety cover closes the blade part securely and prevents the unexpected cut risks.

catalogue	total	blade	pack
number	length	length	quantity
048.50.003	140 mm	40 mm	1 piece


#### **SCALPEL HANDLES**

> Manufactured from stainless steel with approximate length of 130 mm.

> Handle no: 1 carries blades size from 10 to 18. Handle no: 2 carries blade size from 18 to 24.

> Grids at the front part guarantees perfect control during usage.

catalogue number	handle no	total length	pack quantity
048.50.001	1	130 mm	1 piece
048.50.002	2	130 mm	1 piece

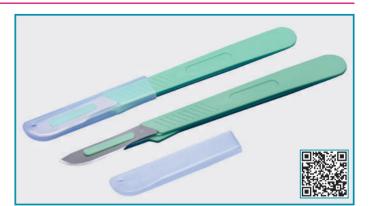





#### SCALPEL BLADE - "no:10"

Manufactured from carbon steel and sterilised with gamma radiation.

Suitable to be used with scalpel handle no: 1.

for




#### SCALPEL BLADE - "no:11"

Manufactured from carbon steel and sterilised with gamma radiation.

> Suitable to be used with scalpel handle no: 1.

for

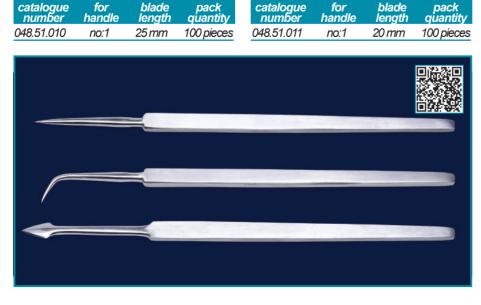



#### SCALPEL BLADE - "no:21"

Manufactured from carbon steel and sterilised with gamma radiation.

> Suitable to be used with scalpel handle no: 2.

catalogue	for	blade	pack
number	handle	length	quantity
048.51.021	no:2	35 mm	100 pieces

#### **DISSECTING NEEDLES**

Needle parts are manufactured from stainless steel with sharp ends.

> Supplied as a set consisting of 3 needles:

- > dissecting needle, straight
- > dissecting needle, bent
- > dissecting needle, lanceolated

catalogue	pack
number	quantity
052.30.001	1 set



BUNSEN BURNER "standard type"

 Most common used bunsen burner with flame adjustment.

> Can be used with all gases such as neutral gas, butane gas and coal gas.

➤ Offers practical control of flame from very slow heating to rapid boiling with an adjustable air and gas regulation ring.

> Precise flame adjustment is guaranteed by a screw driven gas control knob.

catalogue number	pack quantity	Cá r
050.01.001	1 piece	05






> Preferably used if higher heating capacity is required.

> Can be used with all gases such as neutral gas, butane gas and coal gas.

> Offers practical control of flame from very slow heating to rapid boiling with an adjustable air and gas regulation ring.

> Precise flame adjustment is guaranteed by a screw driven gas control knob.

pack	catalogue	pack
uantity	number	quantity
l piece	050.01.002	1 piece

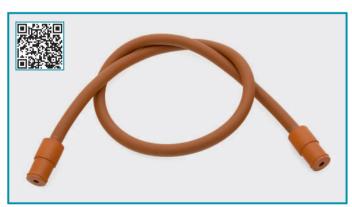



#### BUNSEN BURNER "meker type"

For very high heating heating up to 1700°C is required.

> Can be used with all gases such as neutral gas, butane gas and coal gas.

➤ Offers practical control of flame from very slow heating to rapid boiling with an adjustable air and gas regulation ring.

> Precise flame adjustment is guaranteed by a screw driven gas control knob.

cata nu

050.



> There is always a tilt over risk for bunsen burners.

Bunsen burner stabilizer provides a very stable and robust additional base and holds the attached bunsen burner firmly avoiding above mentioned risk.

➤ The nest perfectly fits to the bases of bunsen burners with catalogue no: 050.01.002 and 050.01.003.

First insert the bunsen burner into the stabilizer nest. Then stabilize the bunsen burner by fixing the provided screw tightly.

alogue ımber	pack quantity	catalogue number	pack quantity
.01.003	1 piece	050.09.001	1 piece

HOSES - "for bunser burners"

Manufactured from extra thick walled rubber. Specially designed to be used with bunsen burners.

> Reinforced ends fits perfect to the bunsen burner at one side and the gas tap at the other side assuring gas leakage free connection.

pack quantity
1 piece
1 piece







ISOLAB chemicals is a registered trademark of ISOLAB Laborgeräte GmbH



DESICCATORS "glass" - "non-vacuum"

Manufactured thick, robust and heat resistant, durable borosilicate glass without vacuum stopcock.

> Excellent smooth grinded body and lid flanges guarantee airtight closure. Supplied with a porcelain perforated desiccator plate.

desiccator diameter	pack quantity
200 mm	1 piece
250 mm	1 piece
300 mm	1 piece
	diameter 200 mm 250 mm

spare lid for non-vacuum desc.	lid diameter	pack quantity
039.06.200	200 mm	1 piece
039.06.250	250 mm	1 piece
039.06.300	300 mm	1 piece



#### DESICCATORS "glass" - "vacuum"

Manufactured from borosilicate glass. Featured with a 2-way high vacuum stopcock enabling consistent and uniform vacuum draw and release.

Excellent smooth grinded body and lid flanges guarantee airtight closure. Supplied with a porcelain perforated desiccator plate.

catalogue number	desiccator diameter	pack quantity
039.02.200	200 mm	1 piece
039.02.250	250 mm	1 piece
039.02.300	300 mm	1 piece

spare lid for vacuum desc.	lid diameter	pack quantity
039.07.200	200 mm	1 piece
039.07.250	250 mm	1 piece
039.07.300	300 mm	1 piece

Silica-Gel beads can be regenerated

when heated at a temperature of maximum 120°C.

The color turns back to original orange

> Packed as 1 kg in a sealed P.P bottle

in order to prevent preabsorption of



color.

moisture.

catalogue number

039.16.001

Silica-Gel beads are moisture > absorbing self - indicating drying agents.

Perfect substitude of classical > desiccator moisture absorbents.

Beads has a grain size variable from 1 to 3 mm. They are free from any heavy and environmentally compatible.

> Original orange color gradually turns to white as the gel absorbs moisture.

> Color change offers monitoring of the saturation level.







After regeneration

packing pecificati

1 kg in P.P bottle



DESICCATORS "P.P & P.C" - "vacuum"


> Manufactured P.P base with transparent P.C cover. Featured with a 3-way high vacuum stopcock enabling consistent and uniform vacuum draw and release.

> Silicone gasket between body and the lid ensures airtight closure. Supplied with a polypropylene perforated desiccator plate.

catalogue number	desiccator diameter	pack quantity
039.12.200	200 mm	1 piece
039.12.250	250 mm	1 piece
039.12.300	300 mm	1 piece

spare porcellain dessiccator plates	lid diameter	pack quantity
039.05.200	190 mm	1 piece
039.05.250	235 mm	1 piece
039.05.300	300 mm	1 piece





MORTARS - "agate"

> Manufactured from high quality, natural agate stone with standard depth.

 Supplied with a pestle with relevant size to agate mortar.

catalogue number	volume	ext. dia	pack height quantity
038.07.050	9 ml	50 mm	25 mm 1 piece
038.07.075	22 ml	75 mm	30 mm 1 piece
			40 mm 1 piece
038.07.125	120 ml	125 mm	45 mm 1 piece
038.07.150	270 ml	150 mm	55 mm 1 piece



#### MORTARS - "deep form"

Manufactured from high quality, natural agate stone with extra depth compared to standard deep mortars.

> Supplied with a pestle with relevant size to agate mortar.

catalogue number	volume	ext. dia	pack height quantity
			35 mm 1 piece
038.09.070	35 ml	70 mm	40 mm 1 piece
			45 mm 1 piece
			55 mm 1 piece
038.09.120	165 ml	120 mm	60 mm 1 piece

#### MORTARS - "black agate"

Manufactured from high quality, natural black agate stone with standard depth.

> Supplied with a pestle with relevant size to agate mortar.

catalogue number	volume	ext. dia	pack height quantity
			30 mm 1 piece
038.18.085	70 ml	85 mm	35 mm 1 piece
038.18.110	140 ml	115 mm	45 mm 1 piece
038.18.125	210 ml	125 mm	50 mm 1 piece
038.18.150	350 ml	150 mm	55 mm 1 piece



#### MORTARS - "alsint"

Manufactured from extremely chemical resistant pure 99,7 % aluminium oxide (alsint).

 Recommended for use absolute contamination free crushing.

> Supplied with a pestle with relevant size to alsint mortar.

 
 catalogue number
 ext. volume
 pack dia
 pack height quantity

 038.08.050
 7 ml
 50 mm
 26 mm
 1 piece

 038.08.075
 30 ml
 75 mm
 40 mm
 1 piece

 038.08.100
 80 ml
 100 mm
 48 mm
 1 piece

 038.08.125
 120 ml
 125 mm
 70 mm
 1 piece

 038.08.150
 150 ml
 150 mm
 75 mm
 1 piece



#### MORTARS - "porcelain"

> Manufactured from high quality, glazed porcelain according to DIN 12906 standard.

Grinding chamber made from unglazed porcelain provides perfect hold of the samples during crushing without splattering.

Supplied without pestle. Please select the appropriate pestle.

 
 catalogue number
 volume
 ext. dia
 pack height quantity

 038.02.065
 70 ml
 80 mm
 40 mm
 1 piece

 038.02.090
 170 ml
 105 mm
 55 mm
 1 piece

 038.02.130
 400 ml
 150 mm
 70 mm
 1 piece

 038.02.150
 700 ml
 175 mm
 70 mm
 1 piece

 038.02.150
 700 ml
 207 mm
 80 mm
 1 piece



PESTLES - "porcelain"

 Manufactured from high quality, glazed porcelain according to DIN 12906 standard.

 Grinding head made from unglazed porcelain for crushing without splattering.

catalogue number	head diameter	total length	pack quantity
038.03.115	24 mm	115 mm	1 piece
038.03.135	30 mm	135 mm	1 piece
038.03.150	36 mm	150 mm	1 piece
038.03.175	42 mm	175 mm	1 piece
038.03.210	55 mm	210 mm	1 piece



EVAPORATING DISHES "porcelain" - "flat base"

 Manufactured from high quality, glazed porcelain according to DIN 12903 standard.

catalogue number	volume	ext. dia	height	pack quantity
038.11.060				
038.11.080	40 ml	80 mm	20 mm	6 pieces
038.11.100	80 ml	110 mm	25 mm	6 pieces
038.11.125				
038.11.160	450 ml	160 mm	35 mm	6 pieces



#### EVAPORATING DISHES "porcelain" - "round base"

 Manufactured from high quality, glazed porcelain according to DIN 12903 standard.

 
 catalogue number
 ext. volume
 pack dia
 pack height quantity

 038.12.060
 40 ml
 60 mm
 25 mm
 6 pieces

 038.12.080
 75 ml
 80 mm
 30 mm
 6 pieces

 038.12.100
 180 ml
 100 mm
 45 mm
 6 pieces

 038.12.125
 310 ml
 125 mm
 48 mm
 6 pieces

 038.12.160
 640 ml
 160 mm
 58 mm
 6 pieces



#### CRYSTALLIZATION DISHES "glass" - "flat base"

 Manufactured from heat resistant, durable borosilicate glass according to DIN 12338.

catalogue number	volume	ext. dia	height	pack quantity
049.05.060				
049.05.100	110 ml	70 mm	40 mm	1 piece
049.05.150				
049.05.300				
049.05.900	860 ml	140 mm	75 mm	1 piece



#### EVAPORATING DISHES "st. steel" - "round base"

Manufactured from high quality, chemical and corrosion resistant AISI 304 grade stainless steel.

catalogue number	volume	ext. dia	height	pack quantity
038.14.060				
038.14.080	125 ml	80 mm	40 mm	1 piece
038.14.100	250 ml	100 mm	55 mm	1 piece





CRYSTALLIZATION DISHES "st. steel" - "flat base"

 Manufactured from high quality, chemical and corrosion resistant AISI 304 grade stainless steel.

catalogue number	volume	ext. dia	height	pack quantity
049.08.070	100 ml	70 mm	35 mm	1 piece
049.08.085	150 ml	85 mm	45 mm	1 piece
049.08.110	400 ml	110 mm	55 mm	1 piece

CRUCIBLES "st. steel" - "medium form"

 Manufactured from high quality, chemical and corrosion resistant AISI 304 grade stainless steel.

catalogue number	external diameter	height	pack quantity
038.13.S35	44 mm	35 mm	1 piece
038.13.S45	51 mm	45 mm	1 piece
038.13.S50	63 mm	50 mm	1 piece

## COMBUSTION BOATS - "porcelain"

 Manufactured from high quality, glazed porcelain.

> In order to prevent breakage controlled cooling and preventing use with direct flame is recommended.





CRUCIBLES - "porcelain"

 Manufactured from high quality, glazed porcelain according to DIN 12904 standard.

In order to prevent breakage controlled cooling and preventing use with direct flame is recommended.

> Supplied without lid. Please select the appropriate size from lid options.

catalogue number	external diameter	height	pack quantity
038.14.L30	30 mm	18 mm	6 pieces
038.14.L35	35 mm	23 mm	6 pieces
038.14.L40	40 mm	25 mm	6 pieces
038.14.L45	45 mm	29 mm	6 pieces
038.14.L50	50 mm	32 mm	6 pieces
038.14.L60	60 mm	38 mm	6 pieces
038.14.L70	70 mm	48 mm	6 pieces

catalogue number	external diameter	height	pack quantity
038.14.M35	35 mm	28 mm	6 pieces
038.14.M40	40 mm	32 mm	6 pieces
038.14.M45	45 mm	36 mm	6 pieces
038.14.M50	50 mm	40 mm	6 pieces
038.14.M60	60 mm	50 mm	6 pieces
038.14.M70	70 mm	60 mm	6 pieces
038.14.M82	82 mm	65 mm	6 pieces

catalogue number	external diameter	height	pack quantity
038.14.H30	30 mm	38 mm	6 pieces
038.14.H35	35 mm	44 mm	6 pieces
038.14.H40	40 mm	49 mm	6 pieces
038.14.H46	46 mm	58 mm	6 pieces
038.14.H51	51 mm	65 mm	6 pieces
038.14.H60	60 mm	79 mm	6 pieces





 Manufactured from high quality, glazed porcelain according to DIN 12904 standard.

catalogue number	inner diameter	external diameter	pack quantity
038.19.035	33 mm	37 mm	6 pieces
038.19.043	42 mm	46 mm	6 pieces
038.19.046	44 mm	49 mm	6 pieces
038.19.052	46 mm	54 mm	6 pieces
038.19.060	57 mm	62 mm	6 pieces
038.19.068	62 mm	69 mm	6 pieces





#### INCINERATING DISHES "porcelain" - "cylindrical"

Manufactured from high quality, glazed porcelain.

catalogue number	internal diameter	height	pack quantity
038.21.040	40 mm	21 mm	1 piece
038.21.050	50 mm	25 mm	1 piece
038.21.060	60 mm	31 mm	1 piece



#### INCINERATING DISHES "porcelain" - "rectangular"

> Manufactured from high quality, glazed porcelain.

catalogue number	dimensions	height	pack quantity
038.20.025	50 x 25 mm	10 mm	1 piece
038.20.046	70 x 46 mm	13 mm	1 piece
038.20.055	100 x 55 mm	16 mm	1 piece



▶ Manufactured from extremely chemical resistant pure 99,7 % aluminium oxide (alsint) resistant to 1700°C.

> In order to prevent breakage controlled cooling and preventing use with direct flame is recommended.

catalogue number	external diameter	height	pack quantity
038.13.A30	30 mm	24 mm	1 piece
038.13.A41	41 mm	37 mm	1 piece
038.13.A48	48 mm	41 mm	1 piece
038.13.A54	54 mm	50 mm	1 piece
038.13.A60	60 mm	50 mm	1 piece
038.13.A66	66 mm	56 mm	1 piece



TUBINGS - "rubber" "standard type"

 Manufactured from natural rubber with standard thickness of durometer 45 A.

► Guarantees excellent chemical and temperature resistance between -25°C to +70°C.

catalogue number	int. / ext. diameter	wall thickness	pack quantity
052.10.001	5/8 mm	1,5 mm	1 meter
052.10.002	5/9 <i>m</i> m	2,0 mm	1 meter
052.10.003	6/9 <i>m</i> m	1,5 mm	1 meter
052.10.004	6/10 mm	2,0 mm	1 meter
052.10.005	7/11 mm	2,0 mm	1 meter
052.10.006	8/12 mm	2,0 mm	1 meter
052.10.007	10/14 mm	2,0 mm	1 meter
052.10.008	12/16 mm	2,0 mm	1 meter



TUBINGS - "rubber" "vacuum type"

Manufactured from natural rubber with thickness required by vacuum applications with durometer 45 A.

➤ Guarantees excellent chemical and temperature resistance between -25°C to +70°C.

catalogue number	int. / ext. diameter	wall thickness	pack quantity
052.11.001	6/16 mm	5,0 mm	1 meter
052.11.002	7/17 mm	5,0 mm	1 meter
052.11.003	8/18 <i>mm</i>	5,0 mm	1 meter
052.11.004	10/20 mm	5,0 mm	1 meter



TUBINGS - "silicone" "standard type"

> Manufactured from natural silicone with standard thickness of durometer 45 A.

Guarantees excellent chemical and temperature resistance between -60°C to +170°C.

catalogue number	int. / ext. diameter	wall thickness	pack quantity
052.12.001	3/6 <i>mm</i>	1,5 mm	1 meter
052.12.002	4/7 mm	1,5 mm	1 meter
052.12.003	5/8 <i>mm</i>	1,5 mm	1 meter
052.12.004	6/10 <i>mm</i>	2,0 mm	1 meter
052.12.005	7/11 mm	2,0 mm	1 meter
052.12.006	8/12 <i>mm</i>	2,0 mm	1 meter
052.12.007	9/13 <i>m</i> m	2,0 mm	1 meter
052.12.008	10/14 mm	2,0 mm	1 meter



6

#### TUBINGS - "PTFE" - standard type"

 Manufactured from chemicaly inert PTFE with excellent mechanical strength.

Guarantees excellent chemical and temperature resistance between -200°C to +280°C.

catalogue number	int. / ext. diameter a	wall thickness	pack quantity
052.13.001	0,5/1 mm	0,25 mm	1 meter
052.13.002	1 / 1,5 mm	0,25 mm	1 meter
052.13.003	1/2 mm	0,50 mm	1 meter
052.13.004	1,5/3,5 mm	1,00 mm	1 meter
052.13.005	2/4 mm	1,00 mm	1 meter
052.13.006	3/5 <i>mm</i>	1,00 mm	1 meter
052.13.007	4/6 <i>mm</i>	1,00 mm	1 meter
052.13.008	6/8 <i>mm</i>	1,00 mm	1 meter
052.13.009	8/10 mm	1,00 mm	1 meter



Offers a clean and sharp cut of all kinds of hoses with external diameter range 6 mm to 25 mm.

➤ The cutter blade is manufactured from stainless steel with two ends. If one cutting end gets blunt, the other side can be used.

pack quantity
1 piece



Offers a clean and sharp cut of all kinds of hoses with external diameter range 6 mm to 25 mm.



#### **TUBING CLAMPS - "click -lock"**

> Manufactured with a stainless steel clamp and HIPS pressure plate for reliable and precise flow control.

Can be used wherever the flow rates at tubings with liquids and gases need to be regulated or stopped.

The micro screw system enables a fine and stepless adjusted flow control.

> The clamp can be opened and closed at any position without tiresome screwing.

The unique construction enables easy mount of the clamp even when the tubing is already connected to a system.


Adjustable pressure plate compress the tubing over a wide area against the stainless hook in order to prevent damages.

max. hose diameter	blue clamps catalogue no	red clamps catalogue no	orange clamps catalogue no	pack quantity
up to 10 mm	052.15.010B	052.15.010R	052.15.0100	1 piece
up to 15 mm	052.15.015B	052.15.015R	052.15.0150	1 piece
up to 20 mm	052.15.020B	052.15.020R	052.15.0200	1 piece





Open the clamp screws





"Click" the clamp

Regulate the flow



#### **TUBING CLAMPS - "hoffman"**

Manufactured from chrome plated steel for reliable and precise flow control of liquids and gases.

Can be used wherever the flow rates at tubings with liquids and gases need to be regulated or stopped.

➤ The swing-open hinged bottom bar enables a fine and stepless adjusted flow control. Variably adjustable up to the total closure of the tubing.

> The unique construction enables easy mount of the clamp even when the tubing is already connected to a system.

catalogue number	for hose	pack quantity
052.17.012	12 mm	1 piece
052.17.020	20 mm	1 piece
052.17.030	30 mm	1 piece




#### TUBING CLAMPS - "worm drive"

Ideal clamps for safe fastening and securing tubings on pipe systems or to stopcocks.

catalogue number	for hose Ø (mm)	pack quantity
052.16.012	8-12	1 piece
052.16.016	10-16	1 piece
052.16.020	12-20	1 piece
052.16.025	16-25	1 piece

Manufactured from chrome steel according to DIN 3017 standard.

TUBE CONNECTORS - "L" - "Y" - "T" - "X"

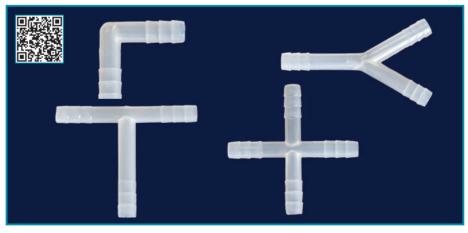

Manufactured from clear polypropylene for safe connection of tubings with exactly same inner diameter.

 4 available models provide excellent, leak-proof multi-functional and connection.

k ity	ID hose diameters	"L" model catalogue no	"Y" model catalogue no	"T" model catalogue no	"X" model catalogue no	pack quantity
æ	6 mm	052.22.006	052.23.006	052.24.006	052.25.006	1 piece
æ	8 mm	052.22.008	052.23.008	052.24.008	052.25.008	1 piece
æ	10 mm	052.22.010	052.23.010	052.24.010	052.25.010	1 piece

067



additive free, best quality natural rubber according to DIN 12871 standard with durometer 40 A.

► Guarantees excellent chemical and temperature resistance between -25°C to excellent +70°C.

12871 standard with durometer 50 A. > Guarantees excellent chemical and temperature resistance between -60°C to +170°C.

natural silicone according to DIN

> Offers multi advantages with their light weight yet robust construction. Can be

dimensions.

easily drilled.

quality natural cork according to DIN 12871 standard

bottom	ton	height	otopporo	otopporo	pack	otopporo	pack
Ømm	top Ø mm	mm	stoppers rubber	stoppers silicone	quantity	stoppers cork	quantity
3,5	6,5	15,0	051.20.001	051.22.001	10 pcs.	051.23.001	10 pcs.
5,0	9,0	20,0	051.20.002	051.22.002	10 pcs.	051.23.002	10 pcs.
8,0	12,0	20,0	051.20.003	051.22.003	10 pcs.	051.23.003	10 pcs.
10,5	14,5	20,0	051.20.004	051.22.004	10 pcs.	051.23.004	10 pcs.
12,5	16,5	20,0	051.20.005	051.22.005	10 pcs.	051.23.005	10 pcs.
14,0	18,0	20,0	051.20.006	051.22.006	10 pcs.	051.23.006	10 pcs.
17,0	22,0	25,0	051.20.007	051.22.007	10 pcs.	051.23.007	10 pcs.
18,0	24,0	30,0	051.20.008	051.22.008	10 pcs.	051.23.008	10 pcs.
21,0	27,0	30,0	051.20.009	051.22.009	10 pcs.	051.23.009	10 pcs.
23,0	29,0	30,0	051.20.010	051.22.010	10 pcs.	051.23.010	10 pcs.
26,0	32,0	30,0	051.20.011	051.22.011	10 pcs.	051.23.011	10 pcs.
29,0	35,0	30,0	051.20.012	051.22.012	10 pcs.	051.23.012	10 pcs.
31,0	38,0	35,0	051.20.013	051.22.013	10 pcs.	051.23.013	10 pcs.
36,0	44,0	40,0	051.20.014	051.22.014	10 pcs.	051.23.014	10 pcs.
41,0	49,0	40,0	051.20.015	051.22.015	6 pcs.	051.23.015	10 pcs.
47,0	55,0	40,0	051.20.016	051.22.016	6 pcs.	051.23.016	10 pcs.
50,5	59,5	45,0	051.20.017	051.22.017	6 pcs.	051.23.017	10 pcs.
56,0	65,0	45,0	051.20.018	051.22.018	6 pcs.	051.23.018	10 pcs.
60,0	70,0	50,0	051.20.019	051.22.019	6 pcs.	051.23.019	10 pcs.
64,5	75,5	55,0	051.20.020	051.22.020	3 pcs.	051.23.020	10 pcs.
71,0	83,0	60,0	051.20.021	051.22.021	3 pcs.	051.23.021	10 pcs.
79,0	92,0	65,0	051.20.022	051.22.022	3 pcs.	051.23.022	10 pcs.

### how to select proper size stopper?

Attached table indicates technical dimensions of NS joints. Please examine the related NS size and select the right stopper from the catalogue list.

Please pay attention to select a larger stopper for perfect closure of the joint.

NS size	total height	diameter narrow end	diameter wide end				
10/19	19,00 mm	8,02 mm	10,00 mm				
12/21	21,00 mm	10,50 mm	12,50 mm				
14/23	23,00 mm	12,17 mm	14,50 mm				
19/26	26,00 mm	16,01 mm	18,80 mm				
24/29	29,00 mm	20,95 mm	24,00 mm				
29/32	32,00 mm	26,12 mm	29,20 mm				
34/35	35,00 mm	30,77 mm	34,50 mm				

chemically inert, autoclavable, best quality natural silicone.

► Guarantees excellent chemical and temperature resistance between -60°C to +170°C.

They provide perfect tight sealing even with poorly finished rims preventing accidental openings.

> Offers optional sealing both from inside or outside of the tube wall.

► For sampling the upper septum can be easily punctured. Flexible body material reseales.



effective diameter	pack quantity
7,1 mm	10 pieces
10,2 mm	10 pieces
12,7 mm	10 pieces
14,9 mm	10 pieces
15,9 mm	10 pieces
19,4 mm	10 pieces
23,7 mm	10 pieces
30,7 mm	10 pieces
	diameter 7,1 mm 10,2 mm 12,7 mm 14,9 mm 15,9 mm 19,4 mm 23,7 mm

### STOPPERS - "hallow glass" - "hexagonal"

Manufactured from borosilicate glass according to DIN 12252.

Hexagonal flat head prevents the stopper from rolling on the bench and avoids the breakage risk.

> A pointed, round formed "drip-tip" stopper lower end guarantees return of the adhered liquid back to the flasks.

NS size	stoppers clear	pack quantity	stoppers amber	pack quantity
NS 10/19	051.03.001	10 pieces	051.04.001	1 piece
NS 12/21	051.03.002	10 pieces	051.04.002	1 piece
NS 14/23	051.03.003	10 pieces	051.04.003	1 piece
NS 19/26	051.03.004	10 pieces	051.04.004	1 piece
NS 24/29	051.03.005	10 pieces	051.04.005	1 piece
NS 29/32	051.03.006	10 pieces	051.04.006	1 piece
NS 34/35	051.03.007	10 pieces	051.04.007	1 piece





### STOPPERS "polyethylene"

Manufactured from polyethylene for perfect tight sealing for all NS joints.

> Hexagonal flat head prevents the stopper from rolling on the bench and avoids the breakage risk.

> The hallow form of the stopper head collects the adhered liquid and prevents the possible damage risk of the laboratory benchs.

 
 catalogue number
 NS size NS size
 pack quantity

 051.08.010
 NS 10/19
 10 pieces

 051.08.012
 NS 12/21
 10 pieces

 051.08.014
 NS 14/23
 10 pieces

 051.08.019
 NS 19/26
 10 pieces

 051.08.024
 NS 24/29
 10 pieces

 051.08.024
 NS 24/29
 10 pieces

 051.08.029
 NS 29/32
 10 pieces











### STOPPERS - "rubber" - "drilled"

Manufactured from additive free, best quality natural rubber according to DIN 12871 standard with durometer 40 A.

> The drilled hole offers labour and time saving applications.

catalogue number	bottom Ø mm	top Ø mm	hole Ø mm	pack quantity
051.21.001	10,5	14,5	3,0	1 piece
051.21.002	12,5	16,5	3,0	1 piece
051.21.003	14,0	18,0	3,0	1 piece
051.21.004	17,0	22,0	4,0	1 piece
051.21.005	18,0	24,0	4,0	1 piece
051.21.006	21,0	27,0	5,0	1 piece
051.21.007	23,0	29,0	5,0	1 piece
051.21.008	26,0	32,0	6,0	1 piece
051.21.009	29,0	35,0	6,0	1 piece
051.21.010	31,0	38,0	7,0	1 piece

### CAPS - "polypropylene"

Manufactured from polypropylene for perfect and tight closure of GL 45 screw necked laboratory bottles.

 Large ridges on the cap outer surface guarantees for increased grip and fast closure.

> Color coded caps enable fast, easy and practical identification of bottle content.

catalogue number	color	pack quantity
051.09.45R	red	10 pieces
051.09.45Y	yellow	10 pieces
051.09.45B	blue	10 pieces
051.09.45G	green	10 pieces

STOPPERS - "flange" - "polyethylene"

Manufactured from polyethylene for perfect tight sealing of specially test tubes. Grooved, conical body shape and large size flanges on the stopper perfectly touch to the walls of the tubes and offer the best leak-proof sealing.

catalogue number 13 mm	catalogue number 16 mm	color	pack quantity
051.10.001	051.11.001	clear 📃	100 pieces
051.10.002	051.11.002	dark blue	100 pieces
051.10.003	051.11.003	yellow	100 pieces
051.10.004	051.11.004	red	100 pieces
051.10.005	051.11.005	green	100 pieces

### **CLING FILM**

> Manufactured from PVC based resin with extremely good stretching, and adhesion characteristics. Perfect tool for sealing and wrapping of various labware.

> Offers an easy use and easy for unravel application.

> Stretches and widens up 50% of original length. Clings around the labware and seals labware with leak-proof tightness.

> Waterproof. Chemically inert and resistant to most organic solvents and caustic agents.

▶ Remains flexible in moderate freezing temperatures. Can resists up to 75°C.



Offers extremely good stretching, and adhesion characteristics. Perfect tool for sealing and wrapping of various labware.

catalogue	roll	roll	foil	pack
number	width	length	thickness	quantity
058.03.001	300 mm	90 m	0,011 mm	1 piece





### SEALING FILM - "parafilm"

Most common sealing film used in laboratories.

> Manufactured from polioefin and paraffin mixture.

➤ Guarantees excellent chemical to salt, inorganic and alkaline solutions up to 48 hours and offers temperature resistance between -45°C to +500°C.

Stretches and widens up 200% of original length.

> Clings around flask necks circumference and seal irregular perimeters of flasks, erlenmeyers, bottles, beakers etc. with leak-proof tightness.

Also prevents breakage risk of flask neck and spillage of flask contents in case of a tilt over.

Clings around flask neck circumference and seal irregular perimeters of flaks, erlenmeyers, bottles, beakers etc. with leak-proof tightness.



catalogue number	width	length	pack quantity	box quantity
058.01.001	50 mm	75 mt	1 piece	24 pieces
058.01.002	100 mm	38 mt	1 piece	12 pieces



### PARAFILM DISPENSER

Perfect tool for safe and easy cutting of 100 mm and 50 mm width parafilms.

> Keeps the remaining part uneffected from environmental conditions.

Can cut one roll of 100 mm or simultaneously 2 rolls of 50 mm width parafilm.

> Manufactured from ABS and featured with a double action cutting blade that silides and cuts.

> The clear hinged lid enables visual control of the remaining parafilm roll.

SPARE CUTTING BLADE



Push the cutting mechanism of the dispenser backwards.



Place the parafilm and move the mechanism back to original position.

> Unique design of the blade holder guarantees easy handling.

> The cutting blade can easily slide in both directions providing a clean and uninterrupted cut.

> The cutting blade is embedded in a holding block ensuring finger safety.

dispenser cat. number	dimensions	body color	pack quantity
058.02.001B	120 x 140 x 140 mm	blue	1 piece
058.02.001P	120 x 140 x 140 mm	purple	1 piece
058.02.001R	120 x 140 x 140 mm	ruby	1 piece





Pull out the necessary length from dispenser for cutting.

Parafilm is cut with one movement of the blade from side to side.

 Unique design of the blade holder guarantees easy handling.

> The cutting blade is embedded in a holding block ensuring finger safety.

> It is recommended that after a certain use period the cutting blade should be exchanged for better cutting performance.

catalogue	pack
number	quantity
058.02.101	1 piece





The clear hinged lid enables visual control of the remaining parafilm roll and keeps the remaining part uneffected from enviromental conditions.

Parafilm dispenser simultaneously can cut 2 rolls of 50 mm width parafilm. 120









### FOIL ROLL - "aluminium"

> Manufactured from polished, pure aluminium sheet for wrapping and sealing of various labware.

Due to the characteristics also convenient to form temporary containers.

 Offers ideal use during autoclaving, heating, freezing applications.

> Approximate foil thickness is 0,018 mm.

catalogue	roll	roll	pack
number	width	length	quantity
058.04.001	300 mm	45 m	1 piece

### FOIL DISPENSER

> Perfect dispenser to be used for aluminium folios and cling films.

> Easy and safe to use; Place the roll inside the box, press the lid, pull the necessary length out and start cutting.

An easy and clean cut without waste is guaranteed with sharp cutting teeth.

 Light weight ensures easy handling with one hand.

 Compact design requires limited working space area.

catalogue	max. roll	pack
number	width	quantity
058.02.002	300 mm	1 piece

### **ALUMINIUM DISCS**

Manufactured from polished, pure aluminium sheet in circular form for sealing of beakers, erlenmeyers, flasks and other various labware necks.

 Guarantees perfect, dust-free seal and offers ideal use during autoclaving, heating, freezing applications.

> Discs do not stick to each other since they are interleaved with protective tissue papers.

> Approximate foil thickness is 0,03 mm.

Guarantees perfect, dust-free seal and offers ideal use during autoclaving, heating, freezing applications.



catalogue number	diameter	pack quantity
058.05.080	80 mm	1000 pieces
058.05.100	100 mm	1000 pieces
058.05.125	125 mm	1000 pieces
058.05.150	150 mm	1000 pieces

### PEN - "engraving"



Easy to operate; hold the pen tightly on the surface, press the power button, let the tip rotate with high speed and provide a permanent inscription on the surface.

 Offers unlimited application for writing, marking and engraving on almost all surfaces without applying pressure.

Easy to operate; hold the pen tightly on the surface, press the power button, let the tip rotate with high speed and provide a permenant inscription on the surface.

The inscriptions and markings will not be effected by chemicals or sunshine and stay forever.

Cordless battery power enables both indoor and outdoor applications. Operates with 2x"AA" battery which is not supplied with the pen.

catalogue number pack quantity 099.01.001 1 piece



### PENS - "permanent-ink"- "double tip"

All purpose pens with round fiber tip for labelling, writing, painting on virtually all materials including glass, metal and plastic surfaces.

> Consists of 2 tips at each end. The "fine" tip at one end has 0,6 mm stroke. The "medium" tip at the other hand has 1,5 mm stroke.

> The pen ink is odorless, smudge-proof, and quick drying. Tips do not dry even if left uncapped for prolonged hours.



Supplied as a pack of 3 pens with red, blue and black colors.

catalogue number pack auantit∖ 099.01.002 set of 3 pens











### PENS - "marker"- "double tip"

> All purpose pens with flat fiber tip for marking texts on paper.

Consists of 2 tips at each end. The "fine" tip at one end has 0,9 mm stroke. The "medium" tip at the other hand has 2,7 mm stroke.

> Airtight pen cap prevents air flow and for extended life cycle.

Supplied as a pack of 5 pens with purple, blue, green, pink and yellow colors.



Supplied as a pack of 5 pens with purple, blue, green, pink and yellow colors.

catalogue	pack
number	quantity
099.01.006	set of 5 pens

### PENS - "permanent-ink"- "single tip"

All purpose pens with round fiber tip for labelling, writing, painting on virtually all materials including glass, metal and plastic surfaces.


Consists of a single tip at one end with 3 mm stroke.

The pen ink is odorless, smudge-proof, and quick drying. Tip do not dry even if left uncapped for prolonged hours.

catalogue	pack
number	quantity
099.01.003	set of 3 pens

pack of 3 pens with blue, red and black colors.

### SEALING TAPE - "for petri dishes"



Perfect tool to protect petri dish interior contents. Stretches and widens up 50% of original length.

 Clings around the petri dish body and seals irrular perimeters of petri dishes.

> Waterproof. Chemically inert and resistant to most organic solvents and caustic agents.

Remains flexible in moderate freezing temperatures. Can resist up to 100°C.

catalogue	atalogue tape	
number	number width	
058.07.001	19 mm	1 piece



 Designed for easy identification of materials with the universally applicable hazard symbols.

Manufactured from 100 µm glossy PE film with acrylic resin adhesive back.

Expands and retracts together with temperature fluctuations and guarantees always a strong adhesive bond.

Chemically inert, water proof, moisture and most solvents and caustic agents. Can be used between - 20°C to + 80°C temperature range.

> Adheres to any clean surface including PTFE coated surfaces without cracking, peeling and degrading. Peels off without leaving any sticky residue.

GHS 1         warning         099.11.001         099.11.003           GHS 1         danger         099.11.002         099.11.004           GHS 2         warning         099.12.001         099.12.003           GHS 2         danger         099.12.002         099.12.004           GHS 3         warning         099.13.001         099.13.003           GHS 3         danger         099.13.002         099.13.004           GHS 4         warning         099.14.001         099.13.003           GHS 5         warning         099.15.001         099.14.003           GHS 5         warning         099.15.001         099.15.003           GHS 5         danger         099.15.002         099.15.004           GHS 6         danger         099.16.002         099.16.004           GHS 7         warning         099.17.001         099.17.003           GHS 8         warning         099.18.001         099.18.003           GHS 8         danger         099.18.002         099.18.004	product type	signal word	label size 26x37 mm	label size 37x52 mm
GHS 2         warning         099.12.001         099.12.003         GHS 2         danger         099.12.002         099.12.004         GHS 3         warning         099.13.001         099.13.003         GHS 3         danger         099.13.001         099.13.003         GHS 3         danger         099.13.002         099.13.004         GHS 4         warning         099.14.001         099.13.003         GHS 5         warning         099.15.001         099.14.003         GHS 5         warning         099.15.001         099.15.003         GHS 5         danger         099.15.002         099.15.004         GHS 6         danger         099.16.002         099.16.004         GHS 7         warning         099.17.001         099.17.003         GHS 8         warning         099.17.001         099.17.003         GHS 8         warning         099.18.001         099.18.003         GHS 8         danger         099.18.002         099.18.004	GHS 1	warning	099.11.001	099.11.003
GHS 2         danger         099.12.002         099.12.004           GHS 3         warning         099.13.001         099.13.003           GHS 3         danger         099.13.002         099.13.004           GHS 4         warning         099.14.001         099.14.003           GHS 5         warning         099.15.001         099.15.003           GHS 5         warning         099.15.001         099.15.003           GHS 5         danger         099.15.002         099.15.004           GHS 6         danger         099.16.002         099.16.004           GHS 7         warning         099.17.001         099.17.003           GHS 8         warning         099.18.001         099.18.003           GHS 8         danger         099.18.002         099.18.004	GHS 1	danger	099.11.002	099.11.004
GHS 3         warning         099.13.001         099.13.003           GHS 3         danger         099.13.002         099.13.004           GHS 4         warning         099.14.001         099.14.003           GHS 5         warning         099.15.001         099.15.003           GHS 5         danger         099.15.002         099.15.004           GHS 6         danger         099.16.002         099.16.004           GHS 7         warning         099.17.001         099.17.003           GHS 8         warning         099.18.001         099.18.003           GHS 8         danger         099.18.002         099.18.004	GHS 2	warning	099.12.001	099.12.003
GHS 3         danger         099.13.002         099.13.004           GHS 4         warning         099.14.001         099.14.003           GHS 5         warning         099.15.001         099.15.003           GHS 5         danger         099.15.002         099.15.004           GHS 6         danger         099.16.002         099.16.004           GHS 7         warning         099.17.001         099.17.003           GHS 8         warning         099.18.001         099.18.003           GHS 8         danger         099.18.002         099.18.004	GHS 2	danger	099.12.002	099.12.004
GHS 4         warning         099.14.001         099.14.003           GHS 5         warning         099.15.001         099.15.003           GHS 5         danger         099.15.002         099.15.004           GHS 6         danger         099.16.002         099.16.004           GHS 7         warning         099.17.001         099.17.003           GHS 8         warning         099.18.001         099.18.003           GHS 8         danger         099.18.002         099.18.004	GHS 3	warning	099.13.001	099.13.003
GHS 5         warning         099.15.001         099.15.003           GHS 5         danger         099.15.002         099.15.004           GHS 6         danger         099.16.002         099.16.004           GHS 7         warning         099.17.001         099.17.003           GHS 8         warning         099.18.001         099.18.003           GHS 8         danger         099.18.002         099.18.004	GHS 3	danger	099.13.002	099.13.004
GHS 5         danger         099.15.002         099.15.004           GHS 6         danger         099.16.002         099.16.004           GHS 7         warning         099.17.001         099.17.003           GHS 8         warning         099.18.001         099.18.003           GHS 8         danger         099.18.002         099.18.004	GHS 4	warning	099.14.001	099.14.003
GHS 6         danger         099.16.002         099.16.004           GHS 7         warning         099.17.001         099.17.003           GHS 8         warning         099.18.001         099.18.003           GHS 8         danger         099.18.002         099.18.004	GHS 5	warning	099.15.001	099.15.003
GHS 7         warning         099.17.001         099.17.003           GHS 8         warning         099.18.001         099.18.003           GHS 8         danger         099.18.002         099.18.004	GHS 5	danger	099.15.002	099.15.004
GHS 8         warning         099.18.001         099.18.003           GHS 8         danger         099.18.002         099.18.004	GHS 6	danger	099.16.002	099.16.004
GHS 8 danger 099.18.002 099.18.004	GHS 7	warning	099.17.001	
	GHS 8	warning		
	GHS 8	danger	099.18.002	099.18.004
GHS 9 warning 099.19.001 099.19.003	GHS 9	warning	099.19.001	099.19.003

### SAFETY LABELS -"GHS pictograms"

By using GHS pictograms you can label all dangerous and hazardous products in your lab and avoid injuries.

"DANGER" word indicates a hazardous situation which if, not avoided will result in death or serious injury.

"WARNING" word indicates a hazardous situation which if, not avoided will result in serious injury.

➤ Each pictogram is defined with four (German / English / French / Spanish) languages. Supplied as rolls of 250 stickers packed in a dispenser box for practicle use.



**1- Reinforced Kraft Paper tape:** With reinforced layer with fiberglass lamination for excellent resistance to abrasion while transporting. Can adhare to any surface due to the strong adhesive backsurface. Suitable for heavy duty packaging, bundling etc.

**2- Reinforced Aluminium tape:** Made with layers of aluminium, fibreglass yarn and Kraft paper. Resistant to U.V degradation, flame, moisture, many chemicals. Can adhare to any surface due to the strong adhesive backsurface. Also suitable for heat/cold reflective wrap along or over insulation, wrapping any product for protection against heat, water, dust and chemicals.

catalogue number	tape name	tape width	tape length	pack quantity
099.04.004	Kraft	60 mm	50 mt	1 roll
099.04.005	Aluminiun	n50 mm	20 mt	1 roll



### **CUTTING TOOL - "for tapes"**

A practicle cutting tool for all mentioned tapes in this page.

Practical to use. Easy to handle. Just place the tape in position and start using immediately.

catalogue	pack
number	quantity
099.04.001	1 piece

### SEALING TAPE - "reinforced"

### TAPES - "for labelling" - "roll"

Manufactured from colored paper with special resin adhesive that resists to moisture and most solvents.

➤ Can be used between -5°C to + 110°C temperature range. Also with stands steam autoclaving cycle and gamma irradiation.

Adheres to any clean surface including PTFE coated surfaces and peels off without leaving any sticky residue.

Accepts writing from almost all pen types such as pencil, ball point pen, solvent ink marker etc.

 Markings remain absolutely legible under the most demanding laboratory conditions.

> Supplied as white color or as "rainbow pack" pack of 6 different colors matching the universal hazard color codes. (yellow for chemical reactivity / blue for health hazards / green for safety / red for flammability / orange tape for biohazard and white for general purpose.)

catalogue number	tape width	tape length	tape color	box quantity
099.02.001	19 mm	30 meter	rainbow colors	set of 6 rolls
099.02.011	19 mm	30 meter	white	1 roll

### TAPE DISPENSER

Suitable for holding and releasing the tape to be cut to users desire.

> The core perfectly fits to the inner diameter of the tape and keeps the tape rigidly.

> Platform includes a writing surface. Finger holes on the platform enable quick release of the tape and accelerate the cutting step.

- > Featured with a cut-off edge for efficient cutting of the tape.
- A weighted base with non-skid pads prevent sliding or lifting.

pack quantity 1 piece

Over all din 155x250x100 mm.	nensions:	catalogue number	0
Cutting platform din	nensions:	099.02.002	
155x110 mm.			

### LABELS - "rectangular form"


> Manufactured from polypropylene flexible paper with acrylic resin adhesive back.

> This unique combination expands and retracts together with temperature fluctuations and guarantees always a strong adhesive bond.


Chemically inert, resists to water, moisture and most organic solvents and caustic agents. Can be used between -96°C to +121°C temperature range. Also withstands steam autoclaving cycle and gamma irradiation.


> Adheres to any clean surface including PTFE coated surfaces without cracking, peeling and degrading. Peels off without leaving any sticky residue.

catalogue number	label length	label width	label color	roll quantity	pack quantity
099.03.050	30 mm	50 mm	white	1000 labels	1 roll
099.03.072	72 mm	40 mm	white	1000 labels	1 roll
099.03.090	90 mm	50 mm	white	1000 labels	1 roll





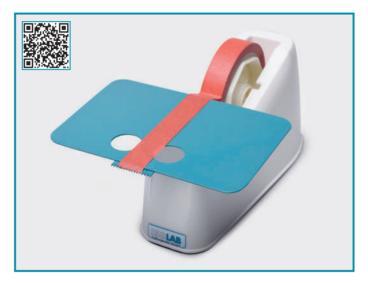

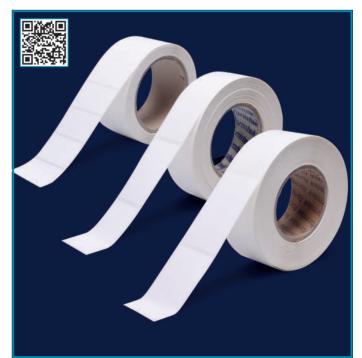



### LABEL - "circular form"

> Manufactured from polyfiber grade flexible paper with acrylic resin adhesive back.

> This unique combination expands and retracts together with temperature fluctuations and guarantees always a strong adhesive bond.

Chemically inert, resists to water, moisture and most organic solvents and caustic agents. Can be used between -196°C to +80°C temperature range.

> Adheres to any clean surface including PTFE coated surfaces without cracking, peeling and degrading. Peels off without leaving any sticky residue.

> Recommended to be used on tube caps with different diameters. Supplied as rolls packed in a dispenser box for practical use.

> Supplied as white color or as "rainbow pack" pack of 6 different colors matching the universal hazard color codes. (yellow for chemical reactivity / blue for health hazards / green for safety / red for flammability / orange tape for biohazard and white for general purpose.)



catalogue number	label diameter	recommended for	label color	roll quantity	pack quantity
099.05.009	9,5 mm	0,5 ml tubes	white	1000 labels	1 roll
099.05.109	9,5 mm	0,5 ml tubes	rainbow pack	1000 labels	6 rolls
099.05.013	13 mm	1,5 & 2,0 ml tubes	white	1000 labels	1 roll
099.05.113	13 mm	1,5 & 2,0 ml tubes	rainbow pack	1000 labels	6 rolls
099.05.019	19 mm	15 ml tubes	white	500 labels	1 roll
099.05.025	25 mm	50 ml tubes	white	500 labels	1 roll



### LABEL DISPENSER

 Perfect organizer for fast and efficient use of labels. Manufactured from clear acrylic and holds 6 label box.

Drop the label box in the label dispenser and feed the paper through the slot.

The writing surface enables easy and clean writing on the label. The sharp cutting edge helps to tear off the labels.

A weighted base with non-skid pads prevent sliding or lifting.

<ul> <li>Supplied without pen.</li> </ul>	catalogue number	pack quantity
	099.50.001	1 piece

### LABEL REMOVAL

> A perfect tool for effortless removal self adhesive labels.

> It works on the adhesive and quickly and gently dissolves adhesive of the label without leaving the sticky residue of the adhesive on the surface.

Can be used on glass, porcelain, metal, wood, cardboard and some plastic surfaces.

Not recommended to be used with polystyrene.	catalogue number

catalogue	pack
number	quantity
099.60.001	1 piece







LABELS - "rectangular form"

> Manufactured from polyfiber grade flexible paper with acrylic resin adhesive back.

> This unique combination expands and retracts together with temperature fluctuations and guarantees always a strong adhesive bond.

Chemically inert, resists to water, moisture and most organic solvents and caustic agents.


> Can be used between -40°C to +121°C temperature range.

> Also withstands steam autoclaving cycle and gamma irradiation.

> Adheres to any clean surface including PTFE coated surfaces without cracking, peeling and degrading. Peels off without leaving any sticky residue.

 Recommended to be used on flat or round surfaces with different diameters.

Supplied as 1000 label rolls packed in a dispenser box for practicle use.



Supplied as white color or as "rainbow pack" pack of 6 different colors matching the universal hazard color codes. (yellow for chemical reactivity / blue for health hazards / green for safety / red for flammability / orange tape for biohazard and white for general use). LABELS - "rectangular form"

> Manufactured from polyfiber grade flexible paper with acrylic resin adhesive back.

> This unique combination expands and retracts together with temperature fluctuations and guarantees always a strong adhesive bond.

> Chemically inert, resists to water, moisture and most organic solvents and caustic agents.

- > Can be used between -196°C to +80°C temperature range.
- Also with stands gamma irradiation.


> Adheres to any clean surface including PTFE coated surfaces without cracking, peeling and degrading. Peels off without leaving any sticky residue.

Recommended specially to be used with cryo vials or on any flat or round surface.

> Supplied as 1000 label rolls packed in a dispenser box for practicle use.

catalogue number	label dimensions	recommended tube volume	label color	pack quantity
099.07.033	33x13 mm	1,5 & 2,0 ml	white	1 roll
099.07.038	38x19 mm	general purpose	white	1 roll

GHS pictograms can be selected from catalogue page no 74.



catalogue number	label dimensions	recommended tube volume	label color	pack quantity
099.06.024	24x13 mm	0,5 ml	white	1 roll
099.06.124	24x13 mm	0,5 ml	rainbow pack	6 rolls
099.06.033	33x13 mm	1,5 & 2,0 ml	white	1 roll
099.06.133	33x13 mm	1,5 & 2,0 ml	rainbow pack	6 rolls
099.06.038	38x19 mm	general purpose	white	1 roll





### BAGS - "autoclavable" - "plain"

Manufactured from a special grade of polypropylene with high tear and puncture resistance.

Commonly used for safe disposal of contaminated laboratory waste such as used petri dishes, test tubes, sample vials, cultureware and other biohazardous products.

 Also offers an alternative for storing and transportation of various products.  Can resist pressure differences during autoclaving.

 Bags should be left open during autoclaving.

Strong side seams stand safe under pressure or weight and guarantee safe holding of bag content.

catalogue number	bag type	width x height	pack quantity
039.30.001	plain	200 x 300 mm	100 pieces
039.30.002	plain	300 x 600 mm	100 pieces
039.30.003	plain	400 x 700 mm	100 pieces
039.30.004	plain	590 x 890 mm	100 pieces
039.30.005	plain	690 x 1100 mm	100 pieces

# ANSARDOUN WINSTE

### BAGS - "autoclavable" - "imprinted"

> Manufactured from a special grade of polypropylene with high tear and puncture resistance.

➤ Commonly used for safe disposal of contaminated laboratory waste such as used petri dishes, test tubes , sample vials, cultureware and other biohazardous products.

Also offers an alternative for storing and transportation of various products.  Can resist pressure differences during autoclaving.

> Bags should be left open during autoclaving.

Strong side seams stand safe under pressure or weight and guarantee safe holding of bag content

> On the bag surface a large writing area and necessary warnings are imprinted.

catalogue number	bag type	width x height	pack quantity
039.20.001	imprinted	320 x 640 mm	50 pieces
039.20.002	imprinted	420 x 600 mm	50 pieces
039.20.003	imprinted	555 x 745 mm	50 pieces



### BAG STAND "adjustable height"

> Manufactured from stainless steel for use with the bags with catalogue no **039.30.001.** 

 Ideal for disposal of small objects during daily use at laboratories.

> Due to it's compact size bag stand does not cover space on the laboratory bench.

The height of the stand is adjustable with the help of adjusting screw.

catalogue	stand	pack
number	diameter	quantity
062.30.002	125 ± 5 mm	1 piece





### BAGS - "with wire closure" - "sterile"

Manufactured from clear and thick polyethylene to be used with chemical, medical, food, biological samples of liquid, powder, solid and paste form.

> With their exceptionally transparent, odour-tight, tear-proof and leakproof properties they offer alternative solutions to laboratory bottles and other flasks.

Sterilized with gamma irradiation, free of RNase, DNase, and pyrogene. Can be frozen to -80°C.

> Unique metal closure system guarantees leak-proof closure preventing odors and any leakage to exterior enviroment.

> Write-on white patch offers a practical area for writing specific marks and notes.

catalogue number	volume	width x height	wall thickness	wire thickness	packing specifications
039.21.001	60 ml	76 x 127 mm	70 microns	0,5 mm	500 pcs / pack - 1000 pcs / case
039.21.002	120 ml	76 x 178 mm	70 microns	0,5 mm	500 pcs / pack - 1000 pcs / case
039.21.003	540 ml	114 x 229 mm	70 microns	0,5 mm	500 pcs / pack - 1000 pcs / case
039.21.004	720 ml	140 x 229 mm	90 microns	0,5 mm	500 pcs / pack - 1000 pcs / case
039.21.005	1650 ml	180 x 300 mm	100 microns	0,5 mm	250 pcs / pack - 1000 pcs / case



### BAGS - "with zip-lock" - "with write - on patch"

> Manufactured from clear and robust polyethylene to be used with chemical, medical, food, biological samples of liquid, powder, solid and paste form.

> Non-sterile, ideal for dust-free storing, collecting, protecting and shipping of specimens and samples.

Write - on white patch offers a practical area for writing specific marks and notes.

Rim channel seal can be opened and closed repeatedly with the guarantee of leak-proof closure.

 
 catalogue number
 w x L (mm)
 pack quantity

 039.08.100
 70x100
 100 pieces

 039.08.150
 100x150
 100 pieces

 039.08.220
 150x220
 100 pieces

 039.08.300
 200x300
 100 pieces

Color coded in 4 different colors for fast and easy identification.



multiple use of the same bag

### **BAG LATCHES**

Manufactured from a special grade of polypropylene for quick closing of the bags. Practical closing system guarantees perfect and tight closure of the bags.

catalogue number	length	width	pack quantity
039.35.075	75 mm	15 mm	4 pieces
039.35.145	145 mm	15 mm	4 pieces
039.35.200	200 mm	15 mm	4 pieces



Offers very tight sealing of the bags. Can be opened again once closed.

length	width	pack quantity
105 mm	2,5 mm	100 pieces
150 mm	2,5 mm	100 pieces
	105 mm	105 mm 2,5 mm

lock.

### BAGS - "homogenization" - "sterile"

bag with side (lateral) filter

> Manufactured from polyethylene. Specially designed for fast and effective crushing of solid samples to the liquid phase.

Sterilized with gamma irradiation, free of RNase, DNase, and pyrogene.

> Even at low temperatures they maintain the stability of the specimen's microbiological status.

### bag with no filter

Bags without filter are generally used for standard and common practises.

Bags with side (lateral) filter divides the bag in 2 non-equal compartments. They are suitable for small samples such as

PCR applications.

> While working with infectious samples, bags can be sealed by any ordinary bag sealer to prevent the escape of aeresols.

> Alternative 3 products:
 > Bag with side filter
 > Bag with full filter

bag with full (page) surface filter

Bags with full (page) filter divides in 2 equal compartments. Solid sample remains in it's side, while the liquid phase moves to the other side.

catalogue number	bag type	volume	width x height	wall thickness	pore size	packing specifications
039.23.003	no filter	400 ml	190 x 300 mm	70 microns	-	50 pcs / pack - 500 pcs / case
039.23.002	side filter	400 ml	190 x 300 mm	70 microns	< 250 microns	50 pcs / pack - 500 pcs / case
039.23.001	full filter	400 ml	190 x 300 mm	70 microns	< 280 microns	50 pcs / pack - 500 pcs / case

### ACCESSORIES - "for homogenization bags"


**BAG STAND - "stainless steel":** Manufactured from AISI 304 grade stainless steel for hanging homogenization bags.

Can carry 4 homogenisation bags of any type.	catalogue number	pack quantity
	608.01.101	1 piece

BAG STAND - "acrylic": Manufactured durable acrylic for hanging homogenisation bags.

Can carry 10 homogenisation bags of any type.	catalogue number
0 11	600.01.100

ation	catalogue number	pack quantity
	608.01.102	1 piece

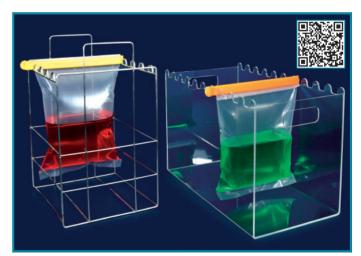

### **BAG LATCHES**

BAG LATCHES: Manufactured from a special grade of polypropylene for quick closing of the bags. Practical closing system guarantees perfect and tight closure of the bags.

 Color coded in 4 different colors for fast and easy identification.

catalogue	pack
number	quantity
039.35.200	set of 4







### GROUND JOINTS - "socket"

ADAPTERS - "expansion"



Manufactured from heat resistant, durable borosilicate glass according to DIN 12249 standard with 120 mm length.

> Excellent grinding quality prevents airleaks and liquid leakage.

catalogue number	joint NS size	pack quantity
063.01.010	10/19	1 piece
063.01.012	12/21	1 piece
063.01.014	14/23	1 piece
063.01.019	19/26	1 piece
063.01.024	24/29	1 piece
063.01.029	29/32	1 piece
063.01.034	34/35	1 piece
063.01.045	45/40	1 piece



### **GROUND JOINTS - "cone"**

Manufactured from heat resistant, durable borosilicate glass according to DIN 12249 standard with 120 mm length.

 Excellent grinding quality prevents airleaks and liquid leakage.

catalogue number	joint NS size	pack quantity
063.02.010	10/19	1 piece
063.02.012	12/21	1 piece
063.02.014	14/23	1 piece
063.02.019	19/26	1 piece
063.02.024	24/29	1 piece
063.02.029	29/32	1 piece
063.02.034	34/35	1 piece
063.02.045	45/40	1 piece

### ADAPTERS - "reduction"



Manufactured from heat resistant, durable borosilicate glass according to DIN 12257 standard with socket size larger than cone size.

catalogue number	cone	socket	pack
number	NS	NS q	uantity
064.11.001	12/21	14/23	1 pc.
064.11.002	14/23	19/26	1 pc.
064.11.003	14/23	24/29	1 pc.
064.11.004	19/26	24/29	1 pc.
064.11.005	14/23	29/32	1 pc.
064.11.006	19/26	29/32	1 pc.
064.11.007	24/29	29/32	1 pc.
064.11.008	19/26	34/35	1 pc.
064.11.009	24/29	34/35	1 pc.
064.11.010	29/32	34/35	1 pc.
064.11.011	24/29	45/40	1 pc.
064.11.012	29/32	45/40	1 pc.

### ADAPTERS - "with screw thread"



> Manufactured from heat resistant, durable borosilicate glass according to DIN 12257 standard.

 Excellent grinding quality prevents airleaks and liquid leakage.

 Different thread sizes offer multiple tubing connection options.

catalogue number l	joint VS size	neck thread o	pack quantity
065.19.141	14/23	GL 14	1 pc.
065.19.142	14/23	GL 18	1 pc.
065.19.291	29/32	GL 14	1 pc.
065.19.292	29/32	GL 18	1 pc.
065.19.293	29/32	GL 25	1 pc.



Manufactured from heat resistant, durable borosilicate glass according to DIN 12257 standard with socket size smaller than cone size.

catalogue number	cone	socket	pack
number	NS	NS Q	uantity
064.12.001	14/23	12/21	1 рс.
064.12.002	19/26	14/23	1 pc.
064.12.003	24/29	14/23	1 рс.
064.12.004	29/32	14/23	1 рс.
064.12.005	24/29	19/26	1 pc.
064.12.006	29/32	19/26	1 pc.
064.12.007	34/35	19/26	1 рс.
064.12.008	29/32	24/29	1 рс.
064.12.009	34/35	24/29	1 рс.
064.12.010	45/40	24/29	1 рс.
064.12.011	34/35	29/32	1 рс.
064.12.012	45/40	29/32	1 рс.

### ADAPTERS - "with screw thread & cap"



 Manufactured from heat resistant, durable borosilicate glass according to DIN 12257 standard.

 Excellent grinding quality prevents airleaks and liquid leakage.

 Supplied with a screw cap with hole featured with silicone sealing.

Provides easy adjustment of thermometer height position.

catalogue joint neck pack number NS size thread quantity 065.21.014 14/23 GL 14 1 pc. 065.21.029 29/32 GL 14 1 pc.

### ADAPTERS - "straight"



> Manufactured from heat resistant, durable borosilicate glass featured with a straight tubing adapter.

> Excellently grinded joint prevents airleaks and leakage.

> Tubing adapter fits tubings with 6-10 mm diameter.

pack wantity
1 piece
1 piece



### ADAPTERS - "straight" - "with stopcock"

Manufactured from borosilicate 3.3 with a straight adapter and a PTFE stopcock.

> Excellently grinded joint prevents airleaks and leakage.

➤ Tubing adapter fits tubings with 6-10 mm diameter.

joint NS size	pack quantity
14/23	1 piece
29/32	1 piece
	14/23

### ADAPTERS - "bend"



Manufactured from heat resistant, durable borosilicate glass featured with a 90° angle bend tubing adapter.

> Excellently grinded joint prevents airleaks and leakage.

Tubing adapter fits tubings with 6-10 mm diameter.

catalogue number	joint NS size	pack quantity
065.27.014	14/23	1 piece
065.27.029	29/32	1 piece

### ADAPTERS - "straight"



> Manufactured from heat resistant, durable borosilicate glass featured with a straight tubing adapter.

> Excellently grinded joint prevents airleaks and leakage.

➤ Tubing adapter fits tubings with 6-10 mm diameter.

catalogue number	joint NS size	pack quantity
065.22.014	14/23	1 piece
065.22.029	29/32	1 piece

### ADAPTERS - "bend"



Manufactured from heat resistant, durable borosilicate glass featured with a 90° angle bend tubing adapter.

> Excellently grinded joint prevents airleaks and leakage.

 Tubing adapter fits tubings with 6-10 mm diameter.

catalogue number	joint NS size	pack quantity
065.23.014	14/23	1 piece
065.23.029	29/32	1 piece



ADAPTERS - "bend" - "with stopcock"

> Manufactured from heat resistant, durable borosilicate glass with a 90° bend tubing adapter and a PTFE stopcock.

Excellently grinded joint prevents airleaks and leakage.

Tubing adapter fits tubings with 6-10 mm diameter.

catalogue number	joint NS size	pack quantity
065.29.014	14/23	1 piece
065.29.029	29/32	1 piece

### ADAPTERS - "straight" - "with stopcock"



> Manufactured from heat resistant, durable borosilicate glass featured with a straight tubing adapter and a PTFE stopcock.

> Excellently grinded joint prevents airleaks and leakage.

Tubing adapter fits tubings with 6-10 mm diameter.

catalogue number	joint NS size	pack quantity
065.24.014	14/23	1 piece
065.24.029	29/32	1 piece

### ADAPTERS - "bend" - "with stopcock"



Manufactured from heat resistant, durable borosilicate glass with a 90° angle bend tubing adapter and a PTFE stopcock.

> Excellently grinded joint prevents airleaks and leakage.

► Tubing adapter fits tubings with 6-10 mm diameter.

catalogue number	joint NS size	pack quantity
065.25.014	14/23	1 piece
065.25.029	29/32	1 piece

ADAPTERS - "bend" - "75° angle"

► Manufactured from heat resistant, durable borosilicate glass 75° angle bend and featured with two cones on both ends.

> Excellently grinded cones prevent airleaks and liquid leakage.

catalogue number	joint NS size	pack quantity
065.37.014	14/23	1 piece
065.37.029	29/32	1 piece
000.07.020	20/02	1 01000



► Manufactured from heat resistant, durable borosilicate glass 90° angle bend and featured with two cones on both ends.

ADAPTERS - "bend" - "90° angle"

 Excellently grinded cones prevent airleaks and liquid leakage.

catalogue number	joint NS size	pack quantity
065.38.014	14/23	1 piece
065.38.029	29/32	1 piece

ADAPTERS - "2 necks" - "45° upwards angled" ADAPTERS - "2 necks" - "75° downwards angled"



Manufactured from heat resistant, durable borosilicate glass featured with a 45° upwards angled socket.

> Excellently grinded joints prevent airleaks and liquid leakage.



Manufactured from heat resistant, durable borosilicate glass featured with a 75° downwards angled socket.

> Excellently grinded joints prevent airleaks and liquid leakage.

catalogue number	socket NS size	cone NS size	angled socket NS size	pack quantity
065.42.001	NS 14/23	NS 14/23	NS 14/23	1 piece
065.42.002	NS 19/26	NS 19/26	NS 19/26	1 piece
065.42.003	NS 29/32	NS 29/32	NS 14/23	1 piece
065.42.004	NS 29/32	NS 29/32	NS 29/32	1 piece

catalogue number	socket NS size	cone NS size	angled socket NS size	pack quantity
065.18.001	NS 14/23	NS 14/23	NS 14/23	1 piece
065.18.002	NS 19/26	NS 19/26	NS 19/26	1 piece
065.18.003	NS 29/32	NS 29/32	NS 14/23	1 piece
065.18.004	NS 29/32	NS 29/32	NS 29/32	1 piece

ADAPTERS - "3 necks" - "angled & parallel"

### ADAPTERS - "2 necks" - "parallel"



> Manufactured from heat resistant, durable borosilicate glass featured with a parallel socket.

> Excellently grinded joints prevent airleaks and liquid leakage.



> Manufactured from heat resistant, durable borosilicate glass featured with one parallel and one angled socket.

 Excellently grinded joints prevent airleaks and liquid leakage.

catalogue number	socket NS size	cone NS size	parallel socket NS size	pack quantity
065.43.001	NS 14/23	NS 14/23	NS 14/23	1 piece
065.43.002	NS 19/26	NS 19/26	NS 19/26	1 piece
065.43.003	NS 24/29	NS 19/26	NS 19/26	1 piece
065.43.004	NS 24/29	NS 24/29	NS 24/29	1 piece
065.43.005	NS 29/32	NS 14/23	NS 14/23	1 piece
065.43.006	NS 29/32	NS 29/32	NS 29/32	1 piece

catalogue number	socket NS size	cone NS size	parallel socket NS size	pack quantity
065.44.001	NS 14/23	NS 14/23	NS 14/23	1 piece
065.44.002	NS 19/26	NS 24/29	NS 19/26	1 piece
065.44.003	NS 19/26	NS 29/32	NS 19/26	1 piece
065.44.004	NS 24/29	NS 24/29	NS 24/29	1 piece
065.44.005	NS 29/32	NS 29/32	NS 29/32	1 piece

### **DISTILLING HEADS**



> Manufactured from heat resistant, durable borosilicate glass according to DIN 12594 standard featured with a 75° downwards angled cone.

> NS 14/23 socket is designed to be used with destillation thermometers.

> Excellently grinded joints prevent airleaks and liquid leakage.



Manufactured from heat resistant, durable borosilicate glass according to DIN 12594 standard featured with a 75° downwards angled cone.

Two parallel NS 14/23 sockets are designed to be used with destillation thermometers.

> Excellently grinded joints prevent airleaks and liquid İeakage.

socket NS size	cone NS size	angled cone NS size	pack quantity
NS 14/23	NS 14/23	NS 14/23	1 piece
NS 14/23	NS 19/26	NS 19/26	1 piece
NS 14/23	NS 29/32	NS 29/32	1 piece
	NS size NS 14/23 NS 14/23	NS size         NS size           NS 14/23         NS 14/23           NS 14/23         NS 19/26	NS 14/23 NS 14/23 NS 14/23 NS 14/23 NS 19/26 NS 19/26

catalogue number	socket NS size	cone NS size	angled cone NS size	pack quantity
065.46.001	NS 14/23	NS 14/23	NS 14/23	1 piece
065.46.002	NS 14/23	NS 19/26	NS 19/26	1 piece
065.46.005	NS 14/23	NS 29/32	NS 14/23	1 piece
065.46.006	NS 14/23	NS 29/32	NS 29/32	1 piece

### SPLASH HEADS - "straight"



Manufactured from heat resistant, durable borosilicate glass for seperation of drops. Advised to be placed directly on top of the distillation flasks.

> Excellently grinded joints prevent airleaks and liquid leakage.

catalogue cone so number NS l NS guantity 065.47.001 14/23 14/23 1 piece 065.47.003 29/32 29/32 1 piece

### ADAPTERS - "delivery" - "straight"



Manufactured from heat resistant, durable borosilicate glass according to DIN 12594 standard with a cone with drain tip.

Featured with a straight socket and a vacuum connecting adapter.

 Excellently grinded joints prevent airleaks and liquid leakage.

catalogue number	cone NS	socket NS	pack quantity
065.34.014	14/23	14/23	1 piece
065.34.029	29/32	29/32	1 piece

# SPLASH HEADS - "bend"



Manufactured from heat resistant, durable borosilicate glass 75° angled bend for seperation of drops. Advised to be placed directly on top of the distillation flasks.

Excellently grinded joints prevent airleaks and liquid İeakage.

catalogue cone socket pack number NS NS quantity 065.48.001 14/23 14/23 1 piece 065.48.005 29/32 29/32 1 piece

### ADAPTERS - "with stopcock"



Manufactured from heat resistant, durable borosilicate glass according to DIN 12594 standard with a socket with drain tip.

Featured with a straight socket and cone and a PTFE stopcock.

 Excellently grinded joints prevent airleaks and liquid leakage.

catalogue number	cone NS	socket NS	pack quantity
065.41.014	14/23	14/23	1 piece
065.41.019	19/26	19/26	1 piece
065.41.024	24/29	24/29	1 piece
065.41.029	29/32	29/32	1 piece











### **DISTILLING LINKS**

- > Manufactured from heat resistant, durable borosilicate glass without condenser with two parallel cones.
- > Excellently grinded joints prevent airleaks and liquid leakage.

catalogue number	cone NS size	cone NS size	pack quantity
065.52.014	NS 14/23	NS 14/23	1 piece
065.52.029	NS 29/32	NS 29/32	1 piece

### DISTILLING LINKS - "with splash head"

Manufactured from heat resistant, durable borosilicate glass with a splash head and with two parallel cones.

> Excellently grinded joints prevent airleaks and liquid leakage.

catalogue number	cone NS size	cone NS size	pack quantity
065.54.014	NS 14/23	NS 14/23	1 piece
065.54.029	NS 29/32	NS 29/32	1 piece

### DISTILLING LINKS - "with socket"

Manufactured from heat resistant, durable borosilicate glass without condenser with two parallel cones. NS 14/23 socket is designed to be used with destillation thermometers.

> Excellently grinded joints prevent airleaks and liquid leakage.

catalogue number	cone NS size	cone NS size	socket NS size	pack quantity
065.53.014	NS 14/23	NS 14/23	NS 14/23	1 piece
065.53.029	NS 29/32	NS 29/32	NS 14/23	1 piece

### DISTILLING LINKS - "with condenser"

> Manufactured from heat resistant, durable borosilicate glass with a liebig condenser with a NS 14/23 socket is designed to be used with destillation thermometers.

> Excellently grinded joints prevent airleaks and liquid leakage.

catalogue number	cone NS size	socket NS size	condenser length	pack quantity
065.55.001	NS 14/23	NS 14/23	160 mm	1 piece
065.55.002	NS 14/23	NS 14/23	250 mm	1 piece
065.55.003	NS 29/32	NS 14/23	250 mm	1 piece
065.55.004	NS 29/32	NS 14/23	400 mm	1 piece


### DISTILLING LINKS - "condenser & adapter"

> Manufactured from heat resistant, durable borosilicate glass with a liebig condenser with a NS 14/23 socket is designed to be used with destillation thermometers. Featured with a vacuum connecting adapter.

> Excellently grinded joints prevent airleaks and liquid leakage.

catalogue number	cone NS size	socket NS size	condenser length	pack quantity
065.56.001	NS 14/23	NS 14/23	160 mm	1 piece
065.56.002	NS 14/23	NS 14/23	250 mm	1 piece
065.56.003	NS 29/32	NS 14/23	250 mm	1 piece
065.56.004	NS 29/32	NS 14/23	400 mm	1 piece

DISTILLING LINKS - "with condenser" - "Claisen head"

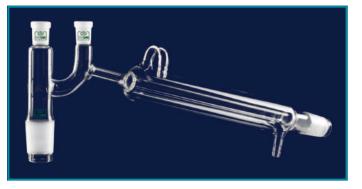

> Manufactured from heat resistant, durable borosilicate glass with a liebig condenser with two NS 14/23 socket is designed to be used with destillation thermometers.

> Excellently grinded joints prevent airleaks and liquid leakage.

catalogue number	cone NS size	socket NS size	condenser length	pack quantity
065.57.001	NS 14/23	NS 14/23	160 mm	1 piece
065.57.002	NS 14/23	NS 14/23	250 mm	1 piece
065.57.003	NS 29/32	NS 14/23	250 mm	1 piece
065.57.004	NS 29/32	NS 14/23	400 mm	1 piece

### DISTILLING LINKS - "with condenser & vacuum adapter" - "Claisen head"



> Manufactured from heat resistant, durable borosilicate glass with a liebig condenser with two NS 14/23 socket is designed to be used with destillation thermometers. Featured with a vacuum connecting adapter.

> Excellently grinded joints prevent airleaks and liquid leakage.

catalogue number	cone NS size	socket NS size	condenser length	pack quantity
065.58.001	NS 14/23	NS 14/23	160 mm	1 piece
065.58.002	NS 14/23	NS 14/23	250 mm	1 piece
065.58.003	NS 29/32	NS 14/23	250 mm	1 piece
065.58.004	NS 29/32	NS 14/23	400 mm	1 piece

### ADAPTERS - "PTFE" - "flexible"

Manufactured from chemicaly inert PTFE with excellent chemical resistance, high mechanical strength and high temperature resistance between -200°C to +260°C.

> Unique flexible body form guarantees 90° angular connections of NS joints and provides corrections of misalingment in glassware assemblies.

> Extra smooth interior finish guarantees high vacuum sealing performance without a need of any lubricant.

catalogue number	socket NS size	cone NS size	pack quantity
065.36.014	NS 14/23	NS 14/23	1 piece
065.36.019	NS 19/26	NS 19/26	1 piece
065.36.024	NS 24/29	NS 24/29	1 piece
065.36.029	NS 29/32	NS 29/32	1 piece

### **GLASS BEADS**

 Manufactured from borosilicate glass.

> They offer practical solutions specially for distillation applications with their different diameters.

catalogue number	diameter (mm)	pack quantity
030.60.003	3,0 - 3,5	1 kg
030.60.004	3,5 - 4,0	1 kg
030.60.005	4,0 - 5,0	1 kg
030.60.006	5,0 - 6,0	1 kg



ADAPTERS - "delivery" - "bend" - "short"



> Manufactured from heat resistant, durable borosilicate glass with 65 mm length.

Featured with a 105° angled bend socket.

 Excellently grinded joint prevents airleaks and liquid leakage.

catalogue number	socket NS size	pack quantity
065.30.014	14/23	1 piece
065.30.029	29/32	1 piece



ADAPTERS - "delivery" - "bend" - "long"

Manufactured from heat resistant, durable borosilicate glass with 200 mm length.

Featured with a 105° angled bend socket.

 Excellently grinded joint prevents airleaks and liquid leakage.

socket NS size	pack quantity
14/23	1 piece
29/32	1 piece
	NS size 14/23

### ADAPTERS - "delivery" - "bend"



Manufactured from heat resistant, durable borosilicate glass featured with a cone and a socket with drain tip.

► Featured with a 105° angled bend socket.

 Excellently grinded joints prevent airleaks and liquid leakage.

catalogue cone socket pack number NS NS quantity 065.32.014 14/23 14/23 1 piece 065.32.029 29/32 29/32 1 piece

# ADAPTERS - "delivery"-"bend"-"with ventilation"



> Manufactured from heat resistant, durable borosilicate glass featured with a cone and a socket with drain tip.

> Featured with a 105° angled bend socket and with ventilation arm useful to be used with highly boiling liquids.

 Excellently grinded joints prevent airleaks and liquid leakage.

catalogueconesocketpacknumberNSNSquantity065.33.01414/2314/231 piece065.33.02929/3229/321 piece

### ADAPTERS - "receiving" - "straight"



> Manufactured from heat resistant, durable borosilicate glass according to DIN 12594 standard with a cone with drain tip.

> Featured with a straight cone and a vacuum connecting adapter.

> Excellently grinded joints prevent airleaks and liquid leakage.

catalogue number	cone NS	socket NS	pack quantity
065.39.014	14/23	14/23	1 piece
065.39.029	29/32	29/32	1 piece

### ADAPTERS - "receiving" - "bend"



► Manufactured from heat resistant, durable borosilicate glass according to DIN 12594 standard with a cone with drain tip.

Featured with a bend cone and a vacuum connecting adapter.

 Excellently grinded joints prevent airleaks and liquid leakage.


catalogue number	cone NS	socket NS	pack quantity
065.40.014	14/23	14/23	1 piece
065.40.029	29/32	29/32	1 piece

### **DRYING TUBES - "bend"**



> Manufactured from heat resistant, durable borosilicate glass according to DIN 12610 standard with a ball and connection tube.

pack quantity
1 piece
1 piece



Manufactured from heat resistant, durable borosilicate glass with a U form.

catalogue number	pack quantity
065.62.100	1 piece
065.62.130	1 piece
065.62.180	1 piece
	•

### DRYING TUBES - "U form" - "with stopcock"



> Manufactured from heat resistant, durable borosilicate glass according to DIN 12616 standard with a U form and featured with a stopcock.

catalogue number	pack quantity
065.63.100	1 piece
065.63.130	1 piece
065.63.180	1 piece



# BOTTLES - "gas washing"

Manufactured from borosilicate 3.3 with thick walls with NS 29/32 neck size.

Supplied without the bottle heads.

catalogue number	bottle volume	pack quantity
065.66.125	125 ml	1 piece
065.66.250	250 ml	1 piece
065.66.500	500 ml	1 piece
065.66.901	1000 ml	1 piece

### BOTTLE HEAD - "glass side arm" - "with disc"



Manufactured from heat resistant, durable borosilicate glass without sintered glass support.

Featured with a glass side arm.

catalogue	pack
number	quantity
065.67.001	1 piece

### BOTTLE HEAD - "P.P side arm" - "without disc"

BOTTLE HEAD - "glass side arm" - "without disc"



 Manufactured from heat resistant, durable borosilicate glass without sintered glass support.

> Featured with with GL 14 screw thread polypropylene side arm which can easily connected disconnected preventing or accidental breakage.

catalogue	pack
number	quantity
065.67.002	1 piece



Manufactured from heat resistant, durable borosilicate glass with sintered glass support.

> Featured with a glass side arm.

Sintered glass disc with porosity 1 for efficient gas dispensing.

catalogue number	pack quantity
number	quantity
065.67.011	1 piece

### BOTTLE HEAD - "P.P side arm" - "with disc"



Manufactured from heat resistant, durable borosilicate glass with sintered glass support.

 Sintered glass disc with porosity 1 enables efficient gas dispensing

Featured with with GL 14 screw thread polypropylene side arms.

catalogue	pack
number	quantity
065.67.022	1 piece

### **CHEMISTRY SET**

> Set consists of 16 pieces various small size glassware with NS 14/23 joints.

> Allows multi micro experiments under vacuum or atmospheric pressure.

> Supplied in a sturdy plastic case featured with foam inserts. Foam inserts prevent breakage and allow organised storing of the contents.

Product descriptions of the	catalogue	pack
chemistry set are shown at	number	quantity
below list.	067.30.001	1 piece

item photo code	product descriptions	pack quantity
1	filter funnel	1 piece
2	receiver adapter - short stem	1 piece
3	stillhead with screwcap adapter	1 piece
4	receiver adapter - with vent	1 piece
5	pear shape flask with three necks - 25 ml	1 piece
6	erlenmeyer flask - 25 ml	1 piece
7	seperating funnel - with PTFE key - 30 ml	1 piece
8	vigreux fractionating column	1 piece

### WATER ESTIMATOR

Manufactured 3.3 borosilicate determination of water with xylol method.

> System consists of a 500 ml flask with NS 29/32 joint, a liebig condenser of 400 mm lenght and a measuring tube with PTFE stopcock.

from

for

catalogue	pack
number	quantity
065.70.001	1 piece



product descriptions	pack quantity
measuring cylinder - 10 ml	1 piece
beaker - low form - 25 ml	1 piece
liebig condenser	1 piece
flat bottom flask - 10 ml	1 piece
keck clip	1 piece
pressure equalising funnel - 10 ml	1 piece
hexagonal stoppers	2 pieces
microscale chemistry case	1 piece
	measuring cylinder - 10 ml beaker - low form - 25 ml liebig condenser flat bottom flask - 10 ml keck clip pressure equalising funnel - 10 ml hexagonal stoppers

### **ARSENIC ESTIMATOR**

Manufactured from borosilicate 3.3 for determination of arsenic and antimony content.

System consists of a 100 ml erlenmeyer with NS 29/32 joint and an absorption tube attached to erlenmeyer.

catalogue	pack
number	quantity
065.71.001	1 piece







CLIPS - "for NS joints"

> Manufactured from POM with excellent chemical resistance and high mechanical strength.

> With their flexible jaws, they guarantee absolute leak-proof, tight connection of two NS joints.

catalogue number	color	pack NS size quantity
063.04.010	black	NS 10/19 1 piece
063.04.012	purple 📃	NS 12/21 1 piece
063.04.014	yellow 📃	NS 14/23 1 piece
063.04.019	blue	NS 19/26 1 piece
063.04.024	green 📃	NS 24/29 1 piece
063.04.029	red	NS 29/32 1 piece
063.04.034	orange	NS 34/35 1 piece
063.04.045	brown	NS 45/40 1 piece



### JOINT GREASE "standard vacuum"

Ideal for lubricating and leak-proof sealing of all types of joints, metal and plastic connectors and stopcocks.

 Recommended to be used under standard vacuum conditions.

 Guarantees excellent chemical and temperature resistance between -40°C to +300°C.

> Non-solidifying during use. Easily washable due to water soluble characteristic.

▶ Best results can be achieved by application of a thin layer.

Supplied in a tube of 30 gram lubricant weight.

catalogue	grease	pack
number	color	quantity
063.17.001	clear	1 piece



### JOINT GREASE "high vacuum"

Ideal for lubricating and leak-proof sealing of all types of joints, metal and plastic connectors and stopcocks.

Recommended to be used under high vacuum conditions.

➤ Guarantees excellent chemical and temperature resistance between -40°C to +320°C.

 Non-solidifying during use. Easily washable due to water soluble characteristic.

 Best results can be achieved by application of a thin layer.

Supplied in a tube of 30 gram lubricant weight.

catalogue	grease	pack
number	color	quantity
063.17.002	brown	1 piece

### JOINT SLEEVES - "PTFE"



➤ Manufactured from chemicaly inert PTFE with excellent chemical resistance, high mechanical strength and high temperature resistance between -200°C to +260°C.

 Unique flexible body form guarantees leak-proof connections of NS joints with high vacuum performance.

> Extra smooth interior finish guarantees high vacuum sealing performance without a need of any lubricant.

pack

q<mark>uantity</mark> 1 piece

1 piece

1 piece

1 piece 1 piece 1 piece

	catalogue number	NS size
IT THE	063.14.014	NS 14/23
	063.14.019	NS 19/26
	063.14.024	NS 24/29
	063.14.029	NS 29/32
	063.14.034	NS 34/35
	063.14.045	NS 45/40




### SEALING TAPE - "PTFE"

➤ Manufactured from chemicaly inert PTFE with excellent chemical resistance, high mechanical strength and high temperature resistance between -200°C to +260°C.

Stretchs, conforms and perfectly seals all joints, connectors, stopcocks with leak- proof tightness.

catalogue	tape	tape	pack
number	width	length	quantity
058.06.001	12 mm	10 mt	1 piece

69

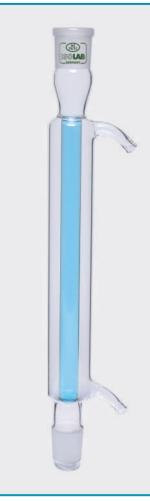

### CONDENSERS - "liebig" - "glass side arm"

➤ Manufactured from heat resistant, durable borosilicate glass according to DIN 12576 standard. Featured with glass side arms fitting 8-9 mm bore size tubings. Thick wall, and reinforced rim prevent breakage during washing and transportation.

catalogue number	effective length	joint NS size	pack quantity
033.11.160	160 mm	NS 14/23	1 piece
033.11.250	250 mm	NS 14/23	1 piece
033.11.252	250 mm	NS 24/29	1 piece
033.11.253	250 mm	NS 29/32	1 piece
033.11.400	400 mm	NS 14/23	1 piece
033.11.402	400 mm	NS 24/29	1 piece
033.11.403	400 mm	NS 29/32	1 piece

### CONDENSERS - "liebig" - "P.P side arm"

➤ Manufactured from heat resistant, durable borosilicate glass according to DIN 12576 standard. Featured with GL 14 screw thread polypropylene side arms fitting 8-9 mm bore size tubings. Side arms can be easily connected or disconnected to the main body preventing accidental breakage.

catalogue number	effective length	joint NS size	pack quantity
033.12.160	160 mm	NS 14/23	1 piece
033.12.250	250 mm	NS 14/23	1 piece
033.12.252	250 mm	NS 24/29	1 piece
033.12.253	250 mm	NS 29/32	1 piece
033.12.400	400 mm	NS 14/23	1 piece
033.12.402	400 mm	NS 24/29	1 piece
033.12.403	400 mm	NS 29/32	1 piece

### CONDENSERS - "allihn" - "glass side arm"


Manufactured from heat resistant, durable borosilicate glass according to DIN 12581 standard. Featured with glass side arms fitting 8-9 mm bore size tubings. Thick wall and reinforced rim prevent breakage during washing and transportation.


catalogue number	effective length	joint NS size	pack quantity
033.13.160	160 mm	NS 14/23	1 piece
033.13.250	250 mm	NS 14/23	1 piece
033.13.252	250 mm	NS 24/29	1 piece
033.13.253	250 mm	NS 29/32	1 piece
033.13.400	400 mm	NS 14/23	1 piece
033.13.402	400 mm	NS 24/29	1 piece
033.13.403	400 mm	NS 29/32	1 piece


### CONDENSERS - "allihn" - "P.P side arm"


Manufactured from heat resistant, durable borosilicate glass according to DIN 12581 standard. Featured with GL 14 screw thread polypropylene side arms fitting 8-9 mm bore size tubings. Side arms can be easily connected or disconnected to the main body preventing accidental breakage.

catalogue number	effective length	joint NS size	pack quantity
033.14.160	160 mm	NS 14/23	1 piece
033.14.250	250 mm	NS 14/23	1 piece
033.14.252	250 mm	NS 24/29	1 piece
033.14.253	250 mm	NS 29/32	1 piece
033.14.400	400 mm	NS 14/23	1 piece
033.14.402	400 mm	NS 24/29	1 piece
033.14.403	400 mm	NS 29/32	1 piece





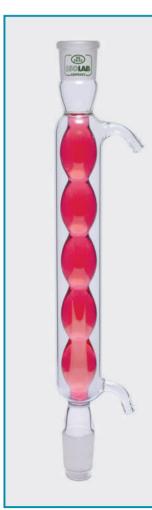

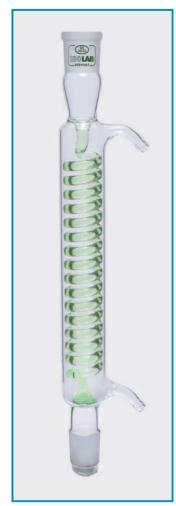

CONDENSERS - "spiral" - "glass side arm"

Manufactured from heat resistant, durable borosilicate glass according to DIN 12592 standard.

> Featured with glass side arms fitting 8-9 mm bore size tubings. Thick wall and reinforced rim prevent breakage during washing and transportation.

catalogue number	effective length	joint NS size	pack quantity
033.15.160	160 mm	NS 14/23	1 piece
033.15.253	250 mm	NS 29/32	1 piece
033.15.403	400 mm	NS 29/32	1 piece

### CONDENSERS - "spiral" - "P.P side arm"


Manufactured from heat resistant, durable borosilicate glass according to DIN 12592 standard.

➤ Featured with GL 14 screw thread polypropylene side arms fitting 8-9 mm bore size tubings. Side arms can be easily connected or disconnected preventing breakage.

> Thick wall and reinforced rim prevent breakage during washing and transportation.

catalogue number	effective length	joint NS size	pack quantity
033.16.160	160 mm	NS 14/23	1 piece
033.16.253	250 mm	NS 29/32	1 piece
033.16.403	400 mm	NS 29/32	1 piece

# 

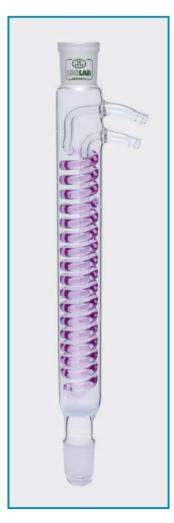

# CONDENSERS - "dimroth" - "glass side arm"

> Manufactured from heat resistant, durable borosilicate glass according to DIN 12591 standard. Featured with glass side arms fitting 8-9 mm bore size tubings. Thick wall and reinforced rim prevent breakage.

catalogue number	effective length	joint NS size	pack quantity
033.17.160	160 mm	NS 14/23	1 piece
033.17.163	160 mm	NS 29/32	1 piece
033.17.250	250 mm	NS 14/23	1 piece
033.17.253	250 mm	NS 29/32	1 piece
033.17.400	400 mm	NS 14/23	1 piece
033.17.403	400 mm	NS 29/32	1 piece


# CONDENSERS - "dimroth" - "P.P side arm"

Manufactured from heat resistant, durable borosilicate glass according to DIN 12591 standard.

> Featured with GL 14 screw thread polypropylene side arms fitting 8-9 mm bore size tubings. Side arms can be easily connected or disconnected preventing breakage.

catalogue number	effective length	joint NS size	pack quantity
033.18.160	160 mm	NS 14/23	1 piece
033.18.163	160 mm	NS 29/32	1 piece
033.18.250	250 mm	NS 14/23	1 piece
033.18.253	250 mm	NS 29/32	1 piece
033.18.400	400 mm	NS 14/23	1 piece
033.18.403	400 mm	NS 29/32	1 piece



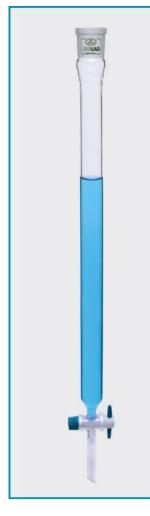

COLUMNS - "chromotography" - "w/o filter"

> Manufactured from borosilicate glass without filter.

> Thick wall and reinforced rim prevent breakage during washing and transportation.

► NS joints are manufactured according to DIN 12242 standard. Supplied with an interchangeable PTFE stopcock which does not require greasing at all.

catalogue number	effective length	internal diameter	socket NS size	pack quantity
066.10.001	200 mm	10 mm	NS 14/23	1 piece
066.10.003	400 mm	20 mm	NS 29/32	1 piece
066.10.004	600 mm	30 mm	NS 29/32	1 piece

### COLUMNS - "chromotography" - "with filter"

➤ Manufactured from borosilicate glass with "pore 1" size sintered glass filter. Reinforced rim prevent breakage.

➤ Perfectly grinded NS necks with smooth interior are manufactured according to DIN 12242 standard. Supplied with an interchangeable PTFE stopcock which does not require greasing at all.

catalogue number	effective length	internal diameter	socket NS size	pack quantity
066.11.001	200 mm	10 mm	NS 14/23	1 piece
066.11.003	200 mm	15 mm	NS 14/23	1 piece
066.11.002	300 mm	10 mm	NS 14/23	1 piece
066.11.004	400 mm	20 mm	NS 29/32	1 piece
066.11.005	600 mm	30 mm	NS 29/32	1 piece

# CONDENSERS - "soxhlet"-"allihn"-"glass arm"

Manufactured from heat resistant, durable borosilicate glass according to DIN 12581 standard.

> Featured with glass side arms fitting 8-9 mm bore size tubings. Thick wall and reinforced rim prevent breakage during washing and transportation.


catalogue number	for extractor volume	cone NS size	pack quantity
035.11.030	30 ml	NS 29/32	1 piece
035.11.070	70 ml	NS 34/35	1 piece
035.11.250	100 / 250 ml	NS 45/40	1 piece
035.11.500	500 ml	NS 45/40	1 piece


# CONDENSERS - "soxhlet"-"allihn"-"P.P arm"

Manufactured from heat resistant, durable borosilicate glass according to DIN 12581 standard. Thick wall, and reinforced rim prevent breakage during washing and transportation.

► Featured with GL 14 screw thread polypropylene side arms fitting 8-9 mm bore size tubings. Side arms can be easily connected or disconnected to the main body preventing accidental breakage.

catalogue number	for extractor volume	cone NS size	pack quantity
035.12.030	30 ml	NS 29/32	1 piece
035.12.070	70 ml	NS 34/35	1 piece
035.12.250	100 / 250 ml	NS 45/40	1 piece
035.12.500	500 ml	NS 45/40	1 piece

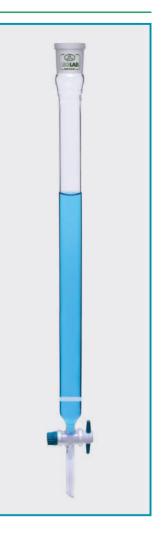

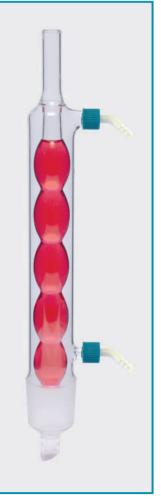

### CONDENSERS - "soxhlet"-"dimroth"-"glass arm"

 Manufactured from heat resistant, durable borosilicate glass according to DIN 12591 standard.

> Featured with glass side arms fitting 8-9 mm bore size tubings. Thick wall and reinforced rim prevent breakage during washing and transportation.

catalogue number	for extractor volume	cone NS size	pack quantity
035.13.030	30 ml	NS 29/32	1 piece
035.13.070	70 ml	NS 34/35	1 piece
035.13.250	100 / 250 ml	NS 45/40	1 piece
035.13.500	500 ml	NS 45/40	1 piece

### CONDENSERS - "soxhlet"-"dimroth"-"P.P arm"

➤ Manufactured from heat resistant, durable borosilicate glass according to DIN 12591 standard. Thick wall and reinforced rim prevent breakage during washing and transportation.

▶ Featured with GL 14 screw thread polypropylene side arms fitting 8-9 mm bore size tubings. Side arms can be easily connected or disconnected to the main body preventing accidental breakage.

catalogue number	for extractor volume	cone NS size	pack quantity
035.14.030	30 ml	NS 29/32	1 piece
035.14.070	70 ml	NS 34/35	1 piece
035.14.250	100 / 250 ml	NS 45/40	1 piece
035.14.500	500 ml	NS 45/40	1 piece



### EXTRACTORS "soxhlet"

ú


Manufactured from heat resistant, durable borosilicate glass without stopcock according to DIN 12602 standard.

Thick wall and reinforced rim prevent breakage during washing and transportation.

> Perfectly grinded NS joint with smooth interior guarantees perfect leakproof sealing.

catalogue number	volume	pack quantity
036.01.030	30 ml	1 piece
036.01.070	70 ml	1 piece
036.01.100	100 ml	1 piece
036.01.150	150 ml	1 piece
036.01.250	250 ml	1 piece
036.01.500	500 ml	1 piece

catalogue number	socket NS size
036.01.030	NS 29/32
036.01.070	NS 34/35
036.01.100	NS 45/40
036.01.150	NS 45/40
036.01.250	NS 45/40
036.01.500	NS 45/40



### EXTRACTOR THIMBLES - "cellulose"

Manufactured from thick and 100 % pure cotton fibres for reproducible results without any harm to the samples.

➤ Offers high temperature resistance up to 550°C, high mechanical strength and excellent retention capacity.

 Controlled dimensional accuracy guarantees excellent fitting to the extractors body.

> Also suitable for extracting solid or liquid samples from the gases.



catalogue number	diameter	height	pack quantity
102.28.080	28 mm	80 mm	25 pieces
102.30.080	30 mm	80 mm	25 pieces
102.33.080	33 mm	80 mm	25 pieces
102.33.094	33 mm	94 mm	25 pieces
102.34.120	34 mm	120 mm	25 pieces

ERLENMEYERS - "glass" - "ground neck"




Manufactured from heat resistant, durable borosilicate glass according to DIN EN ISO 4797 standard.

> Thick wall, heavy base and reinforced rim prevent breakage during washing and transportation.

Perfectly grinded NS necks with smooth interior guarantee excellent leak-proof closure.

clear erlenmeyers	amber erlenmeyers	volume	neck NS size	pack quantity
028.01.050		50 ml	NS 14/23	1 piece
028.01.051		50 ml	NS 19/26	1 piece
028.01.052		50 ml	NS 24/29	1 piece
028.01.053	028.11.053	50 ml	NS 29/32	1 piece
028.01.100		100 ml	NS 14/23	1 piece
028.01.101		100 ml	NS 19/26	1 piece
028.01.102		100 ml	NS 24/29	1 piece
028.01.103	028.11.103	100 ml	NS 29/32	1 piece
028.01.250		250 ml	NS 19/26	1 piece
028.01.251		250 ml	NS 24/29	1 piece
028.01.252	028.11.252	250 ml	NS 29/32	1 piece
028.01.300		300 ml	NS 29/32	1 piece
028.01.500		500 ml	NS 19/26	1 piece
028.01.501		500 ml	NS 24/29	1 piece
028.01.502	028.11.502	500 ml	NS 29/32	1 piece
028.01.901	028.11.901	1000 ml	NS 29/32	1 piece
028.01.902	028.11.902	2000 ml	NS 29/32	1 piece



Various flasks tongs can be selected from cat. page no 52.



Various stoppers can be selected from cat. page no 69.



NS 29 / 32

FLASKS - "glass" - "ground neck"



 Manufactured from heat resistant, durable borosilicate glass according to DIN EN ISO 4797 standard.

 Thick wall, heavy base and reinforced rim prevent breakage during washing and transportation.

 Perfectly grinded NS necks with smooth interior guarantee excellent leakproof closure.

flat bottom clear	round bottom clear	round bottom amber	volume	NS size	pack quantity
030.01.050	030.02.050		50 ml	NS 14/23	1 piece
030.01.051	030.02.051		50 ml	NS 19/26	1 piece
030.01.052	030.02.052		50 ml	NS 24/29	1 piece
030.01.053	030.02.053	030.12.053	50 ml	NS 29/32	1 piece
030.01.100	030.02.100		100 ml	NS 14/23	1 piece
030.01.101	030.02.101		100 ml	NS 19/26	1 piece
030.01.102	030.02.102		100 ml	NS 24/29	1 piece
030.01.103	030.02.103	030.12.103	100 ml	NS 29/32	1 piece
030.01.250	030.02.250		250 ml	NS 19/26	1 piece
030.01.251	030.02.251		250 ml	NS 24/29	1 piece
030.01.252	030.02.252	030.12.252	250 ml	NS 29/32	1 piece
030.01.500	030.02.500		500 ml	NS 24/29	1 piece
030.01.501	030.02.501	030.12.501	500 ml	NS 29/32	1 piece
030.01.900	030.02.900		1000 ml	NS 24/29	1 piece
030.01.901	030.02.901	030.12.901	1000 ml	NS 29/32	1 piece
030.01.902	030.02.902		2000 ml	NS 29/32	1 piece
030.01.904	030.02.904		4000 ml	NS 29/32	1 piece



FLASKS - "2 ground neck" "20° angled & parallel side neck"

> Manufactured from heat resistant, durable borosilicate glass according to DIN 12392 & DIN12394 standards.

> Thick wall, heavy base and reinforced rim prevent breakage during washing and transportation.

> Perfectly grinded NS necks with smooth interior guarantee excellent leak-proof closure.

flasks angled side neck	flasks parallel side neck	volume	center NS size	side NS size
030.24.050	030.30.050	50 ml	14/23	14/23
030.24.100	030.30.100	100 ml	14/23	14/23
030.24.250	030.30.250	250 ml	14/23	14/23
030.25.100	030.31.100	100 ml	24/29	14/23
030.25.250	030.31.250	250 ml	24/29	14/23
030.25.500	030.31.500	500 ml	24/29	14/23
030.25.901	030.31.901	1000 ml	24/29	14/23
030.26.100	030.32.100	100 ml	24/29	19/26
030.26.250	030.32.250	250 ml	24/29	19/26
030.26.500	030.32.500	500 ml	24/29	19/26
030.26.901	030.32.901	1000 ml	24/29	19/26
030.27.100	030.33.100	100 ml	29/32	14/23
030.27.250	030.33.250	250 ml	29/32	14/23
030.27.500	030.33.500	500 ml	29/32	14/23
030.27.901	030.33.901	1000 ml	29/32	14/23
030.27.902	030.33.902	2000 ml	29/32	14/23
030.28.100	030.34.100	100 ml	29/32	19/26
030.28.250	030.34.250	250 ml	29/32	19/26
030.28.500	030.34.500	500 ml	29/32	19/26
030.28.901	030.34.901	1000 ml	29/32	19/26
030.28.902	030.34.902	2000 ml	29/32	19/26
030.29.100	030.35.100	100 ml	29/32	29/32
030.29.250	030.35.250	250 ml	29/32	29/32
030.29.500	030.35.500	500 ml	29/32	29/32
030.29.901	030.35.901	1000 ml	29/32	29/32
030.29.902	030.35.902	2000 ml	29/32	29/32



FLASKS - "3 ground neck" "20° angled & parallel side neck"

Manufactured from heat resistant, durable borosilicate glass according to DIN 12392 & DIN12394 standards.

> Thick wall, heavy base and reinforced rim prevent breakage during washing and transportation.

 Perfectly grinded NS necks with smooth interior guarantee excellent leak-proof closure.

flasks angled side neck	flasks parallel side neck	volume	center NS size	side NS size
030.36.250	030.42.250	250 ml	14/23	14/23
030.37.250	030.43.250	250 ml	24/29	14/23
030.37.500	030.43.500	500 ml	24/29	14/23
030.37.901	030.43.901	1000 ml	24/29	14/23
030.38.250	030.44.250	250 ml	24/29	19/26
030.38.500	030.44.500	500 ml	24/29	19/26
030.38.901	030.44.901	1000 ml	24/29	19/26
030.38.902	030.44.902	2000 ml	24/29	19/26
030.39.250	030.45.250	250 ml	29/32	14/23
030.39.500	030.45.500	500 ml	29/32	14/23
030.39.901	030.45.901	1000 ml	29/32	14/23
030.40.250	030.46.250	250 ml	29/32	19/26
030.40.500	030.46.500	500 ml	29/32	19/26
030.40.901	030.46.901	1000 ml	29/32	19/26
030.41.250	030.47.250	250 ml	29/32	29/32
030.41.500	030.47.500	500 ml	29/32	29/32
030.41.901	030.47.901	1000 ml	29/32	29/32
030.41.902	030.47.902	2000 ml	29/32	29/32

FLASKS - "clear" - "glass" - "pear shape"

Manufactured from heat resistant, durable borosilicate glass according to DIN 12383 standard.

> Thick wall, heavy base and reinforced rim prevent breakage during washing and transportation.

> Perfectly grinded NS necks with smooth interior guarantee excellent leakproof closure.

 
 Catalogue number
 NS volume
 pack size
 pack qty.

 030.49.010
 10 ml
 NS 14/23
 1 pc

 030.49.025
 25 ml
 NS 14/23
 1 pc

 030.49.050
 50 ml
 NS 14/23
 1 pc

 030.49.050
 50 ml
 NS 14/23
 1 pc

 030.49.100
 100 ml
 NS 14/23
 1 pc

 030.49.250
 250 ml
 NS 14/23
 1 pc

 030.49.250
 250 ml
 NS 29/32
 1 pc

 030.52.050
 50 ml
 NS 29/32
 1 pc

 030.52.100
 100 ml
 NS 29/32
 1 pc

 030.52.250
 250 ml
 NS 29/32
 1 pc

 030.52.250
 250 ml
 NS 29/32
 1 pc



 Manufactured from heat resistant, durable borosilicate glass.

Thick wall, heavy base and reinforced rim prevent breakage during washing and transportation.

 Perfectly grinded NS necks with smooth interior guarantee excellent leakproof closure.

> Volume graduations and inscriptions are printed with white enamel.

catalogue number	volume	evaporating NS size	pack quantity
030.55.100	100 ml	NS 29/32	1 piece
030.55.250	250 ml	NS 29/32	1 piece
030.55.500	500 ml	NS 29/32	1 piece
030.55.901	1000 ml	NS 29/32	1 piece

FLASKS - "glass" - "evaporating"

### FLASKS - "clear" - "glass" - "kjeldahl"



> Manufactured from heat resistant, durable borosilicate glass according to DIN 12360 standard.

> Thick wall, heavy base and reinforced rim prevent breakage during washing and transportation.

> Perfectly grinded NS necks with smooth interior guarantee excellent leakproof closure.

 catalogue
 NS
 pack

 number volume
 size
 qty.

 030.57.100
 100ml
 NS 19/26
 1 pc

 030.57.250
 250ml
 NS 29/32
 1 pc

 030.57.500
 500ml
 NS 29/32
 1 pc

 030.57.750
 750ml
 NS 29/32
 1 pc

 030.57.750
 750ml
 NS 29/32
 1 pc

 030.57.901
 1000ml
 NS 29/32
 1 pc

### FLASKS - "receiving"



 Manufactured from heat resistant, durable borosilicate glass.

> Thick wall, heavy base and reinforced rim prevent breakage during washing and transportation.

> Perfectly grinded NS necks with smooth interior guarantee excellent leakproof closure.

catalogue number	volume	receiving NS size	pack quantity
030.56.100	100 ml	KS 35	1 piece
030.56.250	250 ml	KS 35	1 piece
030.56.500	500 ml	KS 35	1 piece
030.56.901	1000 ml	KS 35	1 piece

### CLIPS - "for receiving flasks"

Manufactured from stainless steel with excellent chemical resistance and superior mechanical strenght.

> Perfect tools to keep two KS joints fastened firmly to each other.

catalogue	pack
number	quantity
063.05.001	1 piece



### FLASKS - "clear" - "glass" - "nitrogen"





Manufactured from heat resistant, durable borosilicate glass according to DIN and ISO standards. Featured with an 25° angle PTFE stopcock.

Thick wall, heavy base and reinforced rim prevent breakage during washing and transportation.

> Perfectly grinded NS necks with smooth interior guarantee excellent leak-proof closure.

catalogue number	volume	neck NS size	pack quantity
030.58.025	25 ml	NS 14/23	1 piece
030.58.050	50 ml	NS 14/23	1 piece
030.58.100	100 ml	NS 14/23	1 piece
030.58.250	250 ml	NS 14/23	1 piece
030.59.050	50 ml	NS 29/32	1 piece
030.59.100	100 ml	NS 29/32	1 piece
030.59.250	250 ml	NS 29/32	1 piece
030.59.500	500 ml	NS 29/32	1 piece
030.59.901	1000 ml	NS 29/32	1 piece

### FLASK STANDS - "P.P"

> Manufactured from best quality heat resistant, polypropylene for holding round bottom flasks.

> Unique wall design offers an excellent support at every point of contact.

Easily stackable due to the tapered body form for reducing storage space.

catalogue	for flasks	pack
number	volume	quantity
029.14.902	100 - 2000 ml	1 piece



### CLIPS - "for NS joints"

Manufactured from POM with excellent chemical resistance and high mechanical strength.

> With their flexible jaws, they guarantee absolute leak-proof, tight connection of two NS joints.

catalogue number	color	pack NS size quantity
063.04.010	black	NS 10/19 1 piece
063.04.012	purple	NS 12/21 1 piece
063.04.014	yellow	NS 14/23 1 piece
063.04.019	blue	NS 19/26 1 piece
063.04.024	green 📃	NS 24/29 1 piece
063.04.029	red	NS 29/32 1 piece
063.04.034	orange	NS 34/35 1 piece
063.04.045	brown	NS 45/40 1 piece



### FLASK STANDS - "cork"

> Manufactured from best quality heat resistant, non-porous, natural cork for holding round bottom flasks.

> Unique wall design offers an excellent support at every point of contact.

	catalogue number	recommended flask volume	pack quantity
	029.04.001	50 - 100 ml	1 piece
1	029.04.002	250 - 500 ml	1 piece
1	029.04.003	1000 - 2000 ml	1 piece
1	029.04.004	4000 - 10000 ml	1 piece





### WATER STILLS - "basic"

Offers space saving, and practical design with economical energy and water consumption. Supplies laboratory grade, distilled water free off pyrogen.

> Double walled interior chamber is manufactured from cavitation-proof, seamless, corrosion resistant stainless steel.

Interior chamber should always be kept clean for consistent supply of pure water. Easily removable condenser unit enables fast and efficient cleaning of the chamber.

Integrated low water protection system turns off heating in case lack of water. Integrated over temperature protection system turns off heating in case of a sudden increase of heat.

Automatic circuit breakers ensure user safety in case of over temperature and over current problems.

catalogue no	623.01.004	623.01.008
dimensions (mm)	380 x 290 x 580	380 x 365 x 640
voltage (V)	220	220
frequency (Hz)	50/60	50/60
heating power (W)	3000	6000
output capacity (L/hr)	3,5	7,5
cooling water usage (L/hr)	30 - 50	60 - 80
controler	hydraulic thermostat	
safety devices	over temperature breaker water level switch	
water conductivity	~ 2,3 μS	

### WATER STILLS - "automatic"

> Offers many advantages with fully automatic operation, space saving unique design economical energy and water consumption. Supplies laboratory grade, distilled water free off pyrogen.

Built-in large storage tank stores the produced water.Double walled interior chamber is manufactured from cavitation-proof, corrosion resistant stainless steel.

Interior chamber should always be kept clean for consistent pure water quality. Easily removable condenser unit enables fast and efficient cleaning of the chamber.

Pre-filter system prevents undesired impurities to enter.

Integrated low water protection system turns off heating in case of low water inlet or lack of water supplied.

Integrated over temperature protection system turns off heating in case of a sudden increase of heat.

catalogue no	623.02.004	623.02.008
dimensions (mm)	740 x 345 x 515	680 x 360 x 650
voltage (V)	220	220
frequency (Hz)	50/60	50/60
heating power (W)	3000	6000
output capacity (L/hr)	4	8
storage capacity (L)	8	14
cooling water usage (L/hr)	30 - 50	60 - 80v
controler	hydraulic thermostat	
safety devices	temperature breaker, water level switch water float level sensor	
water conductivity	~ 2,3 µS	





### **PRE - FILTER**

Pre-filter system prevents undesired impurities and built-in large storage tank stores the produced water.

➤ Filter part in the pre-filter system should be controlled often and should be immediately replaced in case of dirt.

catalogue pack number quantity 623.11.110 1 piece





Integrated operating panel for convenient control of the main unit and also the heating bath.

Unique design of the detachable operating panel enables remote control option and easy use of the panel outside the fume hood.

### **ROTARY EVAPORATORS - "vertical"**

Featured with motorised quick-action lift that automatically raises the evaporation flask from the bath in case of any power failure.

> Chemical-resistant double PTFE system and patented pressure spring guarantees an excellent sealing during operation.

► Easy to read large digital LCD screen displays heating temperature, rotation speed, time and other parameters.

> Patented condenser design with 1.500 cm<sup>2</sup> effective cooling capacity guarantees excellent cooling effect.

> Unique motor action enabling selective rotation of the evaporation flask as clockwise or anti-clockwise movement guarantees effective results.

> Featured with an adjustable final position recognition system for protection of the glass parts from breakage.

Timer function with time setting range 1 - 999 minute enables precise control of the operation.

> Supplied with a large, stainless steel 5 L water-oil bath with precise temperature control from ambient to 180°C.

> An automatic over-heat protection system automaticaly stops heating if the bath temperature exceeds 220°C.



Featured with an adjustable final position recognition system for protection of the glass parts from breakage.Unique push-off device to release the flask and protect it from breaking.

Chemical-resistant double PTFE system and patented pressure spring guarantees an excellent sealing during operation.

Optimal interval operation offers dual action in clockwise and counter clockwise for the drying process.

spare parts for rotary evaporator

catalogue no (Vertical)	605.01.001
dimensions / weight (mm / kg)	465 x 457 x 583 / 15,0
power (W)	1400
voltage (V)	220
frequency (Hz)	50/60
heating range (°C)	ambient +5 to 180
heating accuracy (°C)	± 1,0
speed range (rpm)	20 - 280
speed & temp. & time display	LCD
time setting range (min)	1 - 999
rotation direction	reversible
protection class	IP 20
USB interface	yes

	spare parts for rotary evaporator	
catalogue number	product descriptions	pack quantity
605.01.101	vertical condenser	1 piece
605.01.115	diagonal condenser	1 piece
605.01.102	evaporating flask 50 ml	1 piece
605.01.103	evaporating flask 100 ml	1 piece
605.01.104	evaporating flask 250 ml	1 piece
605.01.105	evaporating flask 500 ml	1 piece
605.01.106	evaporating flask 1000 ml	1 piece
605.01.107	evaporating flask 2000 ml	1 piece
605.01.108	reciving flask 100 ml	1 piece
605.01.109	reciving flask 250 ml	1 piece
605.01.110	reciving flask 500 ml	1 piece
605.01.111	reciving flask 1000 ml	1 piece
605.01.112	foam brake	1 piece
605.01.113	vapor tube	1 piece
605.01.114	connection seal	1 piece



FUNNELS "glass" - "plain"

> Manufactured from heat resistant, durable borosilicate glass with short stem according to ISO 4798 standard.

► 60° cone filtering angle guarantees excellent adaptation of the filter papers.

catalogue number	funnel diameter	pack quantity
041.01.040	40 mm	10 pieces
041.01.060	60 mm	10 pieces
041.01.080	80 mm	10 pieces
041.01.100	100 mm	10 pieces
041.01.120	120 mm	6 pieces
041.01.150	150 mm	6 pieces



FUNNELS "P.P" - "plain"

Manufactured from translucent polypropylene with short stem according to ISO 4798 standard.

▶ 60° cone filtering angle guarantees excellent adaptation of the filter papers.

catalogue number	funnel diameter	pack quantity
041.02.040	40 mm	1 piece
041.02.060	60 mm	1 piece
041.02.080	80 mm	1 piece
041.02.100	100 mm	1 piece
041.02.120	120 mm	1 piece
041.02.150	150 mm	1 piece



FUNNELS "glass" - "analitical"

 Manufactured from borosilicate glass with long stem according to ISO 4798 standard.

➢ 60° cone filtering angle guarantees excellent adaptation of the filter papers.

➤ Internal helicoid ribs increase the filtering speen also prevent back pressure and airlocks.

glass	funnel	pack	
funnel	diameter	quantity	
041.03.080		1 piece	



"P.P" - "analitical"

 Manufactured from translucent polypropylene with short stem according to ISO 4798 standard.

▶ 60° cone filtering angle guarantees excellent adaptation of the filter papers.

Internal helicoid ribs increase the filtering speen also prevent back pressure and airlocks.

ack	P.P	funnel	
antity	funnel	diameter	
piece	041.04.080	80 mm	1 piece

### FUNNELS - "polypropylene" - "ribbed"



 Manufactured from translucent polypropylene with short stem according to ISO 4798 standard.

> Helicoid ribs increase the filtering speed also prevent back pressure and airlocks.

➤ 60° cone angle for perfect adaptation of the filter papers.

catalogue number	funnel diameter	pack quantity
041.05.040	40 mm	1 piece
041.05.060	60 mm	1 piece
041.05.080	80 mm	1 piece
041.05.100	100 mm	1 piece
041.05.120	120 mm	1 piece
041.05.150	150 mm	1 piece





### FUNNELS - "powder" - "P.P & glass"

 Manufactured from polypropylene or from borosilicate glass specially for transfering powders.

> Stem guarantees perfect fit to the flask necks and large bore diameter guarantees fast delivery of the material.

funnel diameter	P.P funnels	glass funnels	cone NS size	pack quantity
65 mm	041.07.065	041.08.060	14/23	1 piece
80 mm	041.07.080	041.08.080	19/26	1 piece
100 mm	041.07.100	041.08.100	24/29	1 piece
120 mm	041.07.120	041.08.120	29/32	1 piece
150 mm	041.07.150			1 piece



### FUNNELS HOLDERS "steel" - "without bosshead"

Manufactured from high quality, corrosion resistant chromated steel for holding all kinds of funnels up to 150 mm diameter in the most secure way.

> Unique ring shape with a slit offers practical use also with separating funnels.

catalogue number	holder diameter	pack quantity
042.03.040	40 mm	1 piece
042.03.060	60 mm	1 piece
042.03.080	80 mm	1 piece
042.03.100	100 mm	1 piece



### FUNNELS HOLDERS "steel" - "with bosshead"

> Manufactured from high quality, corrosion resistant chromated steel for holding all kinds of funnels up to 150 mm diameter in the most secure way.

Ring with slit offers use also with separating funnels.

> The boss head mounted to the stem enables fast and easy attachment of the funnel holder to the stand rods.

catalogue number	holder diameter	pack quantity
042.04.040	40 mm	1 piece
042.04.060	60 mm	1 piece
042.04.080	80 mm	1 piece
042.04.100	100 mm	1 piece



FUNNELS HOLDER "polypropylene" - "without slit"

Manufactured from polypropylene for holding all kinds of funnels from 60 mm up to 150 mm diameter in the most secure way.

Two tapered wedges in the locking system are used to ensure firm grip on rods of diameter range 10 mm to 13 mm.



Funnel holder without slit consists of 2 parts.

catalogue	pack
number	quantity
042.05.001	1 piece



FUNNELS HOLDER "polypropylene" - "with slit"

Manufactured from polypropylene for holding all kinds of funnels from 60 mm up to 150 mm diameter in the most secure way.

> Specially recommended to be used with seperating funnels.

➤ Two tapered wedges in the locking system are used to ensure firm grip on rods of diameter range 10 mm to 13 mm.





cataloguepacknumberquantity042.06.0011 piece



FUNNELS HOLDER "steel" - "adjustable height"

Manufactured from high quality, corrosion resistant chromated steel for holding all kinds of funnels up to 150 mm diameter in the most secure way.

The extendable funnel ring guarantees practical use with different funnel heights.

catalogue	pack	
number	quantity	
042.06.010	1 piece	



FLASKS - "filter" "glass" - "glass side arm"

 Manufactured from borosilicate glass according to ISO 6556 standard.

► Featured with glass side arm fitting 6-10 mm bore size tubings.

> Thick wall, heavy base and reinforced rim prevent breakage during washing and transportation.

catalogue number	volume	pack quantity
040.01.100	100 ml	1 piece
040.01.250	250 ml	1 piece
040.01.500	500 ml	1 piece
040.01.901	1000 ml	1 piece
040.01.902	2000 ml	1 piece







## PROTECTIVE COLLARS "for filter flasks"

120LAB

Manufactured from natural rubber with a special design that keeps the funnel and filtering flask always in center.

These adapters also provide all-round protection reducing impact damages.

Also clean seal is created between the flask rim and the funnel neck.

catalogue number	for flask volume	pack quantity
040.05.001	100 ml	1 piece
040.05.002	250 - 500 ml	1 piece
040.05.003	1000 ml	1 piece
040.05.004	2000 ml	1 piece

## FUNNELS - "büchner" "porcelain" - "P.P"

> Porcelain büchner funnels are manufactured from thick and robust glazed porcelain according to DIN 12905 to be used with filter funnels. Support plate with holes holds the filter paper allows maximum filtering speed.

➤ Polypropylene büchner funnels are manufactured from polypropylene with a perforated filter plate. The upper part can be stacked with the lower part to form a vacuum seal.Upper and lower parts can be separated for efficient cleaning.

funnels porcelain	funnels P.P	inner diameter	pack quantity
042.01.070	042.02.070	75 mm	1 piece
042.01.090	042.02.090	90 mm	1 piece
042.01.110	042.02.110	110 mm	1 piece



FLASKS - "filter" "glass" - "P.P side arm"

Manufactured from borosilicate glass according to ISO 6556 standard.

▶ Featured with GL 14 screw thread P.P side arm fitting 6-10 mm bore size tubings. Side arms can be easily connected or disconnected to the body preventing accidental breakage.

volume	pack quantity
100 ml	1 piece
250 ml	1 piece
500 ml	1 piece
1000 ml	1 piece
2000 ml	1 piece
	100 ml 250 ml 500 ml 1000 ml

FUNNELS - "gooch" - "glass" "with sintered glass disc"



Manufactured from heat resistant, durable borosilicate glass with an acid resistant sintered glass disc for filtration.

> Guarantees an easy and fast filtering without the need of any kind of filter paper.

> Heavy and thick body construction and reinforced rim prevent breakage during washing and transportation.

catalogue number	nominal volume	porosity grade	, type	pack quantity
043.01.051	50 ml	1	3 D	1 piece
043.01.052	50 ml	2	3 D	1 piece
043.01.053	50 ml	3	3 D	1 piece
043.01.054	50 ml	4	3 D	1 piece
043.01.071	75 ml	1	11 D	1 piece
043.01.072	75 ml	2	11 D	1 piece
043.01.073	75 ml	3	11 D	1 piece
043.01.074	75 ml	4	11 D	1 piece
043.01.121	125 ml	1	17 D	1 piece
043.01.122	125 ml	2	17 D	1 piece
043.01.123	125 ml	3	17 D	1 piece
043.01.124	125 ml	4	17 D	1 piece
043.01.501	500 ml	1	25 D	1 piece
043.01.502	500 ml	2	25 D	1 piece
043.01.503	500 ml	3	25 D	1 piece
043.01.504	500 ml	4	25 D	1 piece



CRUCIBLES - "gooch" - "glass" - "with sintered glass disc"





Manufactured from heat resistant, durable borosilicate glass with an acid resistant sintered glass disc for filtration.

Guarantees an easy and fast filtering without the need of any kind of filter paper.

> Heavy and thick body construction and reinforced rim prevent breakage during washing and transportation.

crucibles sint. glass	porosity grade	type	nominal volume	diameter	pack quantity
043.02.031	1	1 D	30 ml	30 mm	1 piece
043.02.032	2	1 D	30 ml	30 mm	1 piece
043.02.033	3	1 D	30 ml	30 mm	1 piece
043.02.034	4	1 D	30 ml	30 mm	1 piece
043.02.051	1	2 D	50 ml	40 mm	1 piece
043.02.052	2	2 D	50 ml	40 mm	1 piece
043.02.053	3	2 D	50 ml	40 mm	1 piece
043.02.054	4	2 D	50 ml	40 mm	1 piece

## GASKETS - "natural rubber"

Manufactured from natural rubber with conical body form. Designed to fit Buchner funnels and Gooch funnels.

Can be used also reverse cleaning of filter crucibles and as a support to standard funnels.

➤ Conical body form guarantees perfect fitting of funnels, filter funnels and crucibles to the filter flask necks.

Supplied as a set of 7 different size adapters which guarantee perfect fit to all filter funnel necks with different volume sizes.





catalogue	pack
number	quantity
040.06.001	1 set

CRUCIBLES - "gooch" - "porcelain" - "with perforated base"

 Manufactured from glazed porcelain with perforated bottom layer.

> The crucible body form guarantees perfect fit to "GUKO" adapters.

crucibles sint. glass	nominal volume	diameter x height	pack quantity
043.08.015	15 ml	29 x 33 mm	6 pieces
043.08.030	25 ml	36 x 45 mm	6 pieces
043.08.050	40 ml	40 x 50 mm	6 pieces

## VACUUM MANIFOLDS - "stainless steel"





Volume graduation inside walls of the funnels offer practical volume indication of the sample. Closure clamps under each funnels once closed guarantee

perfect and vacuum tight sealing.



The stainless steel frit filter supports 47/50 mm diameter ensures a uniform distribution.



➤ Manufactured from borosilicate glass according to ISO 6556 standard with a volume of 2000 ml. Featured with GL 14 screw thread polypropylene side arms fitting 6-10 mm bore size tubings.

 Side arms can be easily connected or disconnected for easy use.

#### FILTER BOTTLE "for vacuum system"

➤ Manufactured from borosilicate glass according to ISO 6556 standard with a volume of 5000 ml. Featured with GL 14 screw thread polypropylene side arms fitting 6-10 mm bore size tubings.

Side arms can be easily connected or disconnected for easy use.

filter	filter	pack
flask	bottle	quantity
043.06.001	043.06.011	1 piece

> Vacuum manifolds allow filtration of multiple samples either at once or independently by controlling the separate branch valves. Suitable to be used with 47/50 mm diameter membrane filters.

> Body and the funnels are manufactured from AISI 304 quality stainless steel to be used at food, beverage, pharmaceutical and water quality laboratories.

> The main body is featured with handles on both sides for easy hold and carriage.

Stainless steel funnels has a volume capacity of 500 ml. They can be used for sample volumes from 50 ml up to 500 ml.

> Volume graduation inside walls of the funnels offer practical volume indication of the sample.

> Attachment and removal of the funnels can be easily achieved with the attached closure clamp.

Closure clamps under each funnel once closed guarantee perfect and vacuum tight sealing.

> The stainless steel frit filter support ensures a uniform distribution of the residues.

> All parts of vacuum filter set are fully autoclavable. They can also flame strilized except o-rings.

 Vacuum manifolds are supplied with a cap for each funnel.

catalogue number	manifold model	pack quantity
043.05.101	1 station	1 piece
043.05.103	3 stations	1 piece
043.05.106	6 stations	1 piece





#### VACUUM FILTER SET

Manufactured from borosilicate glass particularly suitable for analysis of microscopic residues, particle controls and multipurpose filtration application.

Thick wall, heavy base and reinforced rim prevent breakage during washing and transportation.

> Suitable to be used with 47/50 mm diameter membrane filters.

> Supplied with filter funnel of 300 ml volume capacity, support base with sintered disc, vacuum connection side arm, connecting clamp and 1000 ml flask.

catalogue	vacuum	pack
number	flask	quantity
043.03.001	1000 ml	1 piece



# **VACUUM FLASK**

➤ Manufactured from borosilicate glass with thick walls resistant to vacuum applications with NS 29/32 reverse joint.

flask volume	pack quantity
1000 ml	1 piece
2000 ml	1 piece
	volume 1000 ml



#### CLAMP

Manufactured from aluminium for tight closure of the support base with sinter plate to the filter funnel.

catalogue	pack
number	quantity
043.03.002	1 piece



# **FILTER FUNNEL**

Manufactured from borosilicate glass for excellent fit to the top of the support part.

catalogue number	funnel volume	pack quantity
043.03.003	300 ml	1 piece
043.03.006	500 ml	1 piece



## SUPPORT BASE

Manufactured from borosilicate glass with excellent fit to the bottom of the filter funnel with a glass filter disc plate.

catalogue	pack
number	quantity
043.03.004	1 piece



FILTER PAPERS - "quantitative"

 Quantitative papers are recommended for analytical and gravimetric analysis.

> Manufactured first from high quality 100% cellulose fibres. They are further treated with dilute acid to remove any remaining organic or inorganic impurities. As the last step they are washed and cleaned with demineralised water.

They guarantee low ash content around less than 0,01% and around 95% alpha-cellulose amount.

	ISOLAB cat. no	color code	filtration speed	diameter	pack quantity
105.01.110	105.11.110	blue	slow	110 mm	100 pieces
105.02.110	105.12.110	white	medium	110 mm	100 pieces
105.03.110	105.13.110	black	fast	110 mm	100 pieces
105.01.125	105.11.125	blue	slow	125 mm	100 pieces
105.02.125	105.12.125	white	medium	125 mm	100 pieces
105.03.125	105.13.125	black	fast	125 mm	100 pieces



## FILTER PAPERS - "general purpose"

Manufactured from high quality 100% cellulose with a good humidity resistance and relatively high absorbtion capacity.

> Suitable for general laboratory filtrations. Alternatively, can also be used as a bench protector or pharmaceutical product preperation.

catalogue number	paper dimensions	paper specifications	pack quantity
107.40.140	40 x 40 cm	60 gr / m²	250 pieces
107.58.158	58 x 58 cm	60 gr / m²	250 pieces



## FILTER PAPERS - "qualitative"

> Qualitative papers are recommended for routine separation work.

➤ They are manufactured from high quality 100% cellulose fibres for consistent filtration speed, loading capacity and wet strength.

➤ They guarantee low ash content around less than 0,1% and around 59% alpha-cellulose amount.

M. Nagel cat. no	ISOLAB cat. no	grade	filtration speed	diameter	pack quantity
106.01.110	106.11.110	No:2	slow medium		
106.02.110	106.12.110	No:1	medium	110 mm	100 pieces
106.03.110	106.13.110	No:4	fast	110 mm	100 pieces
106.01.125	106.11.125	No:2	slow medium	125 mm	100 pieces
106.02.125	106.12.125	No:1	medium		100 pieces
106.03.125	106.13.125	No:4	fast	125 mm	100 pieces



#### FORCEPS - "for filter papers"

Manufactured from high quality, chemical and corrosion resistant AISI 304 grade stainless steel.

 Most commonly used forceps for placing and picking filter papers during filtering process.

Robust and seamless construction guarantees long life cycle.

 Grid lines on the middle part enable safe and easy handling.

catalogue	total	pack
number	length	quantity
048.04.001	120 mm	1 piece

## PUMPS - "vacuum & pressure"



Ideal pumps for all kinds of filtration applications and also for air sampling, suspended solid tests, vacuum distillation, gel drying, chromotography applications. Can be used simultaneously both as a vacuum pump and as a pressure pump for pressure supply.

▶ Piston driven, belt free motor does not need any oil or lubricant and offers continuous oil free pumping. Siliconised rubber feet holds the pumps on the bench surface.

> Unique design of the pump guarantees maintenance free and long life cycle with minimum noise level less than 50dB.

> Filter barrier in the air exchange compartment of the pump enables clean air cycling at all times. Vacuum and pressure indicator at model 622.12.001 shows operational vacuum and pressure values at all times.

Thermal protection system for overheating guarantees automatic stop in case of over heat during process.

catalogue number	maximum flow rate	maximum vacuum	maximum pressure	tube thread	motor power	total weight	vacuum& pressure indicator	dimensions
622.11.001	15 L / min.	250 mbar	30 Psi	6 mm	75 watt	4 kg	non	195x98x156 mm
622.12.001	30 L / min.	200 mbar	30 Psi	6 mm	160 watt	8 kg	yes	210x160x235 mm



# WATER JET PUMP "polypropylene"

 Manufactured from polypropylene for continuous filtering applications.

 Suitable to operate under 10 kg/cm<sup>2</sup> water pressure.

> Featured with a non-return valve that eliminates water back flow.

 Easily dismantled for effective cleaning.

Can be used also as a simple vacuum pump.

catalogue	pack
number	quantity
040.10.001	1 piece



## **FLOW INDICATOR**

> Manufactured from PMP for precise optical indication of the flow. Can resist max 2 bar pressure. Can be used with tubings of 6 to 11 mm internal diameter.

➤ For optimum performance the minimum flow rate of 50 ml/ minute (vertically) and 140 ml / minute (horizontally) is required.

Functions in both directions	catalogue	pack
and can be mounted with any	number	quantity
angle.	052.18.001	1 piece


## NON-RETURN VALVE - "polypropylene"

 Manufactured from polypropylene for usage with tubing connections and vacuum systems.

> Prevents water back flow when the pressure declines. Useful for any tubing system and vacuum line.

Max. safe working pressure at ambient temperature: 2,0 bar. Min. safe working pressure at ambient temperature: 0,07 bar.

re	catalogue	tube	pack
,0	number	diameter	quantity
re vz	040.10.005	8 - 11 mm	1 piece

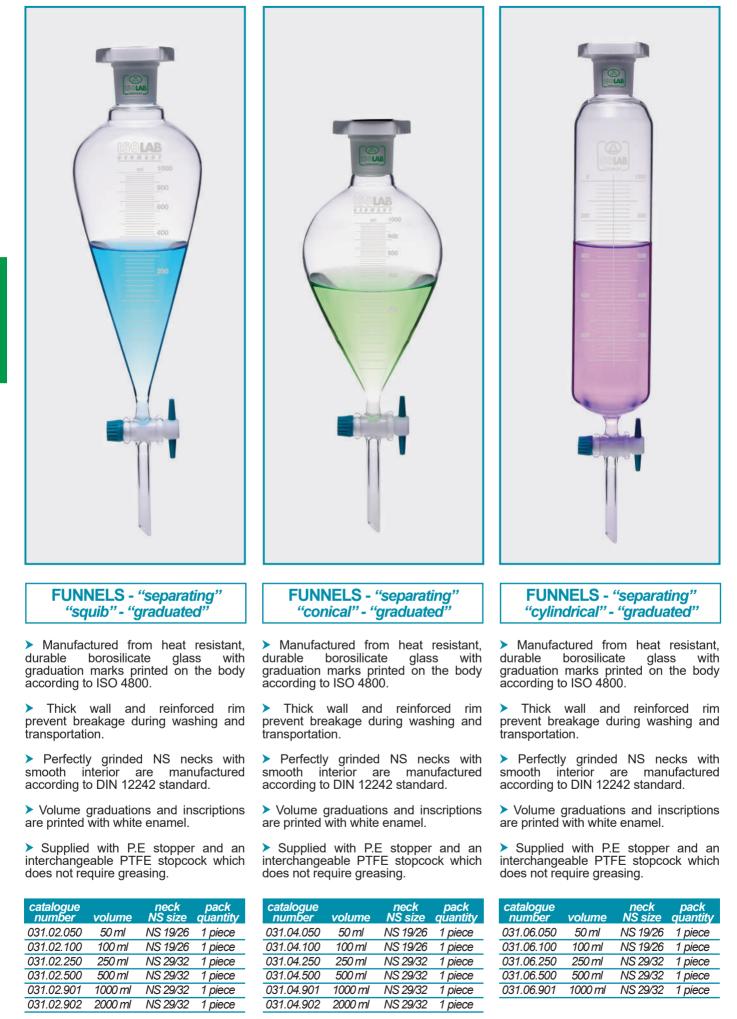



FUNNELS - "dropping" "conical" - "graduated"

Manufactured from heat resistant, durable borosilicate glass with graduation marks printed on the body according to ISO 4800.

> Thick wall and reinforced rim prevent breakage during washing and transportation.

> Perfectly grinded NS necks with smooth interior are manufactured according to DIN 12242 standard.

 Volume graduations and inscriptions are printed with white enamel.

 Supplied with P.E stopper and an interchangeable PTFE stopcock which does not require greasing.

catalogue number	volume	neck NS	cone NS	pack quantity
032.01.050	50 ml	19/26	29/32	1 piece
032.01.100	100 ml	19/26	29/32	1 piece
032.01.250	250 ml	29/32	29/32	1 piece
032.01.500	500 ml	29/32	29/32	1 piece
032.01.901	1000 ml	29/32	29/32	1 piece

FUNNELS - "dropping" "cylindrical" - "graduated"

Manufactured from heat resistant, durable borosilicate glass with graduation marks printed on the body according to ISO 4800.

> Thick wall and reinforced rim prevent breakage during washing and transportation.

> Perfectly grinded NS necks with smooth interior are manufactured according to DIN 12242 standard.

> Volume graduations and inscriptions are printed with white enamel.

> Supplied with P.E stopper and an interchangeable PTFE stopcock which does not require greasing.

catalogue number	volume	neck NS	cone NS	pack quantity
032.02.050	50 ml	19/26	29/32	1 piece
032.02.100	100 ml	19/26	29/32	1 piece
032.02.250	250 ml	29/32	29/32	1 piece
032.02.500	500 ml	29/32	29/32	1 piece
032.02.901	1000 ml	29/32	29/32	1 piece

FUNNELS - "dropping" "cylindrical" - "graduated" "with relief tube" Ξ

Manufactured from heat resistant, durable borosilicate glass with graduation marks printed on the body according to ISO 4800.

 Thick wall and reinforced rim prevent breakage.

> Perfectly grinded NS necks with smooth interior are manufactured according to DIN 12242 standard.

> Volume graduations and inscriptions are printed with white enamel.

➤ Supplied with P.E stopper and an interchangeable PTFE stopcock which does not require greasing.

catalogue number	volume	neck NS	cone NS	pack quantity
032.03.050	50 ml	19/26	29/32	1 piece
032.03.100	100 ml	19/26	29/32	1 piece
032.03.250	250 ml	29/32	29/32	1 piece
032.03.500	500 ml	29/32	29/32	1 piece
032.03.901	1000 ml	29/32	29/32	1 piece



# **CENTRIFUGE - "mini"**

> Compact and easy to use personal centrifuge for quick spin downs, micro-filter cell separations, and HPLC samples.

> Durable transparent and UV resistant polycarbonate lid and ABS resin body.

> DC motor accelerates the rotor to the set speed with low vibration and also with a quiet operation less than 45 dB noise level.

> Starts and reaches a maximum speed of 7.000 rpm in seconds.

Multi voltage design guarantees stable running and high accuracy of speed.

> Featured with a door interlock system for extra safety.

> For user safety electronic brake immediately stops when lid opens.

> Rotor is seated on a tapered shaft which enables tool-free, fast and easy exchange.

Supplied with two rotors and adapters to accommodate 0,5 ml and 1,5 ml and 2 ml tubes and also PCR tubes.

6 cavity rotor designed for 1,5 & 2.0 ml tubes directly.	16 cavit 0,2 ml P also hol



603.01.001 catalogue no dimensions / weight (mm / kg) 175 x 140 x 117 / 0,5 voltage (V) 100 - 240 frequency (Hz) 50/60 7000 speed (rpm) 2680 maximum RCF (xg) noise level (dB) < 45 run time continuous operation 0,2/0,5/1,5/2,0 ml x 6 rotor capacity 0,2 ml x 16 PCR strips 0,2 ml x 2 PCR 8 strips standard accessories 16 cavity & 6 cavity rotors & adapters



**Easy to start:** Close the lid, the rotor starts and instantly reaches 7.000 rpm.



**Easy to stop:** Open the lid, the electronical brake immediately stops the rotor.

CENTRIFUGE - "mini" - "high speed"



Ideal centrifuge for fast spins for higher RCF requirement, for PCR protocols, for microfilter cell seperations, clinical applications and HPLC protocols.

> Offers memory function up to 10 different programs.

> Featured with an explosion proof and fully enclosed strong inner structure for full safety.

Brushless DC motor accelerates the rotor to the set speed with low vibration and also with a quiet operation less than 56 dB noise level.

> Air evacuation system ensures free air flow during high speed to prevent samples being over heated.

 User friendly large LCD display enables easy setting and reading of the functional parameters.

➢ Both RPM and RCF can be set and displayed. The parameters can be modified after the set speed is reached.

Metal casing with low gravity, provides stable and reliable running at maximum speed.



User friendly large LCD display enables easy setting and reading of the functional parameters. Both RPM and RCF can be set and displayed.



High strength plastic rotor with excellent balance offers a stable operation. 12 cavity rotor designed for 1,5 & 2.0 ml tubes directly.

Starts and reaches the maximum speed of 15.000 rpm with max 15.100 RCF in seconds. Speed can be set with an accuracy of +/- 20 rpm.

> Timer can be set from 30 seconds to 99 minutes or continuous running. Timer starts once the target speed is reached for more accurate operation time.

Offers quick spins by pressing and holding the "pulse" key.

> Multi voltage design guarantees stable running and high accuracy of speed.

Featured with a dual door interlock system for twice safety. Electronic brake immediately stops when lid opens for user safety.

> Lid is released automatically when the rotor stops.

Rotor is sealed on a tapered shaft which enables tool-free, fast and easy exchange.

Supplied with a 12 cavity rotor designed for 1,5&2.0 ml tubes directly.

catalogue no	603.02.001	
dimensions / weight (mm / kg)	255 x 245 x 140 / 6,0	
voltage (V)	100 - 240	
frequency (Hz)	50/60	
maximum speed (rpm)	15000	
maximum RCF (xg)	15100	
speed accuracy (rpm)	± 20	
increment (rpm)	100	
noise level (dB)	< 56	
run time	timer & continuous operation	
rotor capacity	1,5/2,0 ml x 12	
standard accessories	12 cavity rotors	
safety devices	door interlock over speed detection over temperature detection automatic internal diagnosis	



catalogue no	603.05.001	
dimensions / weight (mm / kg)	255 x 245 x 140 / 6,0	
voltage (V)	220	
frequency (Hz)	50	
maximum speed (rpm)	4500	
speed control (rpm)	increment of 100	
maximum RCF (xg)	2490	
RCF control (xg)	increment of 100	
speed accuracy (rpm) ± 20		
noise level (dB)	< 56	
run time	30 sec 99 min. or continuous	
acceleration / braking time (sec)	20 s∱ 20 s↓	
safety devices	door interlock over - speed detection automatic internal diagnosis	
additional features	sound alert function speed / RCF swich short time run function	



Featured with a dual door interlock system for twice safety.

Electronic brake immediately stops when lid opens for user safety.

Lid is released automatically when the rotor stops.

# **CENTRIFUGE - "clinical"**

Ideal centrifuge for fast separation of serum, plasma, urea, blood samples and other routine applications in medical, research and chemical laboratories.

Explosion proof and marked as CE, cTUVus, and FCC. MCA test according to IEC/EN61010-2-10.

Brushless DC motor accelerates the rotor to the set speed with low vibration and also with a quiet operation less than 56 dB noise level.

> User friendly large LCD display enables easy setting and reading of the funtional parameters.

Both RPM and RCF can be set and displayed. The parameters can be modified after the set speed is reached.

> Starts and reaches a maximum speed of 4.500 rpm with max 2.490 RCF in seconds. Speed can be set with an accuracy of +/- 20 rpm.

Metal casing with low gravity, provides stable and reliable running at maximum speed.

> Timer can be set from 30 seconds to 99 minutes or continuous running. Timer starts once the target speed is reached for more accurate operation time.

Short spin function is used for quick spins by pressing and holding the "pulse" key.

Multi voltage design guarantees stable running and high accuracy of speed.

> Featured with a dual door interlock system for twice safety.

> Electronic brake immediately stops when lid opens for user safety. Lid is released automatically when the rotor stops.

➤ The unique design guarantees stable running and high accuracy of the speed. High strenght rotor and excellent balance technology guarantees a quiet and stable operation.

> Delivered complete with a 8 cavity angled rotor and suitable adaptors to be used with 15 ml conical tubes and all kinds of blood collection tubes.



High strength plastic rotor and excellent balance technology to quarantee a quiet and stable operation.

Delivered complete with a 8 cavity angled rotor and suitable adaptors to be used with 15 ml conical tubes and all kinds of blood collection tubes.




User friendly large LCD display offers easy identification of parameters and shows all informations including accumulated running time and last running parameters.

Both RPM or G-force can be set and displayed. Parameters can be modified after the set speed is achieved.





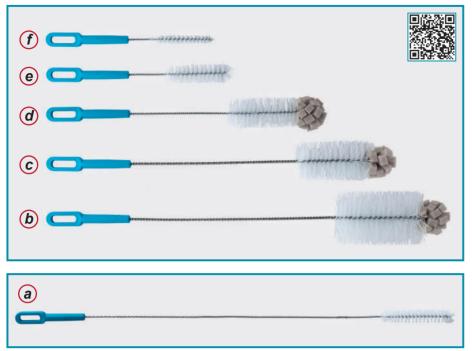

brush code	catalogue number	product descriptions	brush diameter	brush length c	pack juantity
а	071.02.001	Burette and tubings cleaning brush	20 mm	125 mm	1 piece
b	071.02.002	Large size bottle cleaning brush	70 mm	130 mm	1 piece
С	071.02.003	Medium size bottle cleaning brush	50 mm	110 mm	1 piece
d	071.02.004	Small size bottle cleaning brush	40 mm	110 mm	1 piece
е	071.02.005	Common test tubes cleaning brush	25 mm	100 mm	1 piece
f	071.02.006	Narrow test tubes cleaning brush	12 mm	80 mm	1 piece



## LABORATORY BRUSH "natural fibre / perlon"

 Excellent tools for washing and cleaning of all type of laboratory bottles, flasks, tubes, condensers, burettes etc.

> Brush material is manufactured from highest quality of fibre/perlon for long life cycle.

 Brush stem is manufactured from twisted steel wire.

Brush handle is manufactured from polypropylene and offers extreme easy handling and use of the brush.

> Unique handle design enables hanging of the brush to a convenient place for easy reach.

Spherical sponge top part enables access to every corner of the labware and guarantees perfect cleaning results.



Spherical sponge top part enables access to every comer of the labware and guarantees perfect cleaning results.

## LABORATORY BRUSH "hinged & swivel head"

 Specially recommended for curved and cornered shaped labware such as round bottom flasks.

Uniquely designed convex swiveling brush head gets contact with all over the surface of the flask including difficult curves and corners and enables thorough cleaning.

> The brush head has a slightly convex shape for fast and effective cleaning even also at heavy soiled flasks.

> Strong yet flexible bristles provide long lasting trouble free life cycle. Good grip due to the solid and long wooden handle.

➤ The swivel brush part fits through NS 29/32 or larger or any non tapered neck with a diameter 24 mm or larger.

➤ 360 mm length brush handle offers easy touch of the bottoms of larger size flasks.

catalogue swivel handle pack number head size length quantity 071.03.001 21x44x24 mm 360 mm 1 piece

# LABORATORY BRUSH - "non - absorbant foam"

Manufactured from non-absorbant reinforced foam which will not absorb water and not become soggy even after multiple use. > Essentially much longer lasting than other common brushes. > Cleans laboratory glassware with minimum effort and maximum efficiency. > Will not chip, break or scratch laboratory glassware, can also be safety used on plastic labware. > Ergonomically designed wide handles enable easy rotating of brush.

## LABORATORY BRUSH - "flexible"

> Specially recommended for labware with narrow neck and wider base such as flasks, erlenmeyers, bottles etc.

> Feautured with a flexible body which perfectly adapts to the base and interior wall shape of the vessel to be cleaned.

> Offers perfect cleaning also for large size labwares with it's total lenght 370 mm and brush diameter 20 mm.

catalogue pack number quantity 071.05.001 1 piece

## LABORATORY BRUSH - "for tubings"

> Specially recommended for hoses, tubings with diameter from 12 mm to 25 mm.

> Perfectly adapts to the rounding of the tube and flexible long handle enables even the round labware can be cleaned effectively.

catalogue	brush	total	pack
number	diameter	length	quantity
071.05.005	20 mm	1200 mm	1 piece



## LABORATORY BRUSH - "for tubes"

> Specially recommended for tubes due to the unique design which fits to all tube sizes from the smallest to the largest diameter.

Consists of two parallel cleaning brush rods hold be a single head. The rods can be pulled and moved to sides.

> This feature enables the contact of the brush all over the interior surface of different tubes with different diameters.

> This tube brush with it's unique features guarantees fast and very effective cleaning of all tubes with different size and lenght.

catalogue number	brush diameter	total length	pack quantity
071.05.004	25 mm	180 mm	1 piece


# LABORATORY BRUSH - "round head"



Specially recommended for all labware with cylindrical form such as cylinders, beakers, vertical tanks and other similar flasks.

> Guarantees perfect cleaning with it's sprerical cleaning brush part that touches every surface and corner of labware's interior.

catalogue number	brush size	brush diameter	total length	pack quantity
071.05.002	short	60 mm	350 mm	1 piece
071.05.003	long	70 mm	400 mm	1 piece

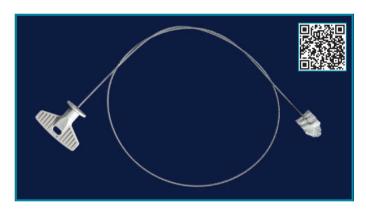





Draining racks are supplied without packs pegs. Pegs should be ordered separately.

# **DRAINING RACK**

> These proffessional draining racks cover all the cleaning demands of a modern laboratory.

Manufactured from water resistant, sturdy polyresin thick plate for life time usage.

Medium size rack with 72 peg compartments

Large size rack with 122 peg compartments

> The collecting tray at the bottom part collects the drained water and dispens with the help of a hose supplied as a standard to the rack.

> Supplied complete with wall mounting kit, draining hose and fixing template.

> Draining racks are supplied with 16 small and 16 large pegs. Please kindly order for more pegs seperately.



> Alternative 2 racks:

The collecting tray at the bottom part collects the drained water and dispens by a hose supplied as a standard to the rack.

catalogue number	rack width	rack height	peg quantity	pack quantity
071.01.002	500 mm	610 mm	72	1 piece
071.01.003	500 mm	1010 mm	122	1 piece



## **DRAINING PEGS**

> Pegs are manufactured from ABS which is extremely resistant side effects. Pegs are supplied disassembled and can easily be inserted into the related compartments on the draining rack.

catalogue number	for flask neck diameter	peg type	peg form	pack quantity
071.01.101	15 mm & more	large	triangular	16 pieces
071.01.102	6 mm - 15 mm	small	round	16 pieces



# DRAINING RACK

> Manufactured from high quality, chromated steel. Double shelve design offers practical use and best draining option with all size of glasswares.





# AUTOCLAVE - "vertical"

This easy to use, desktop, vertical autoclave offers practical solutions for sterilization.

> Safe, reliable and complete sterilization is guaranteed by immersion type electrical heating elements with high thermal efficiency.

> Sterilization chamber is manufactured from single piece stainless steel of 2,5 mm thickness.

Over-temperature" and "over-pressure" systems ensures highest safety level during operation run cycle.

Silicone sealing ring guarantees excellent and safe closure and prevents steam leakage offering always clean and dry environment.

> Featured with a LED screen electronic timer enabling the time control between 1 - 99 minutes.

> Operative pressure clearly visible and controllable by a pressure gauge. Also featured with buzzer type alarm function for low water level.



"Over-temperature" and "overpressure" systems ensures highest safety level during operation cycle.

#### **TEST INDICATOR - "for steam sterilization"**

Specially designed for steam sterilisation tests. Consist of a rolled paper with temperaure sensitive stripes on the surface.

> These stripes changes color once the ambient temperature reaches steam sterilisation temperature level.

Irreversible color change from pale yellow to dark brown proves that the sterilisation protocols has been successfully covered.

> Adhesive at the back of the rolled paper strongly adheres to paper, plastic and textile surfaces yet easily removable without leaving any trace.

 Slightly crepped paper surface allows easy marking by any kind of pen.

catalogue	roll	roll	pack
number	width	length	quantity
101.03.001	19 mm	50 m	1 piece

before

sterilization

after sterilization





Featured with a LED screen electronic timer enabling the time control between 1 - 99 minutes.

catalogue no	601.02.024
external dimensions (mm)	390 x 400 x 690
chamber dimensions (mm)	Ø280 x 310
chamber volume (L)	24
voltage (V)	220
frequency (Hz)	50/60
power (kW)	2,0
sterilizing (pressure / temp.)	100 - 120 КРа / 121°С 200 КРа / 127°С
water tank capacity (It)	1,5
water consumption / cycle (It)	0,4
internal material	stainless steel
external material	stainless steel
safety devices	over heat protection over pressure protection leakage breaker safety valve door lock system



## ULTRASONIC CLEANERS - "standard"

Offer ideal solutions for intensive and gentle cleaning of glassware, metal parts, electronic components, instruments.

Featured with robust stainless steel vibration tank and housing with handles to carry on both sides. Tubs made of cavitation – proof stainless steel.

Assures uniform, precision cleaning over the entire surface, and consistent cavitation that reaches and cleans even tiny crevices on the parts.

Membrane keypad with digital LED panel for simultaneous display for set & actual temperature and set & actual time.

> Memory function keeps settings in memory for frequent and repeated operations.

> Pause function gives an option to pause and restart the operation at any desired moment.

> High heating performance ensures short warm-up period.

> Heating can be controlled up to 80°C with 1°C increments.

> Time control is possible between 1-60 minutes with 1 minute increments.

Delivered complete with stainless steel lid and stainless steel "standard density" basket.

► Ultrasonic cleaners from 10 to 28 L are featured with a drainage valve for removal of the water from the tank.

catalogue no	621.05.001	621.05.003	621.05.006	621.05.010	621.05.015	621.05.022	621.05.028
ext. dimensions (mm)	175 x 155 x 225	265 x 165 x 225	365 x 175 x 285	420 x 265 x 285	365 x 340 x 365	540 x 340 x 365	540 x 340 x 365
tank dimensions (mm)	150 x 138 x 65	238 x 138 x 100	302 x 152 x 150	302 x 239 x 150	325 x 295 x 150	502 x 298 x 150	502 x 298 x 200
tank volume (L)	1,1 L	2,7 L	5,7 L	9,6 L	14,5 L	21,7 L	27,7 L
ultrasonic power (W)	60	120	180	240	360	360	480
frequency (kHz)	40	40	40	40	40	40	40
heating power (W)	60	180	300	300	500	600	600
max. heating (°C)	80	80	80	80	80	80	80
heating accuracy (°C)	± 1	± 1	± 1	± 1	± 1	± 1	± 1
time control (min)	1 - 60	1 - 60	1 - 60	1 - 60	1 - 60	1 - 60	1 - 60
drainage valve	N/A	N/A	N/A	yes	yes	yes	yes
standard accesories	basket & lid						





Ultrasonic cleaners from 10 to 28 L featured with a drainage valve for removal of dirty water.



Keypad with digital LED panel for simultaneous display of set & actual temperature and set & actual time.



Featured with sturdy. stainless steel handles for safe and easy hold of the ultrasonic bath.



catalogue no	621.06.003	621.06.006	621.06.010
ext. dimensions (mm)	265x165x225	365x175x285	420x265x285
tank dimensions (mm)	238x138x100	302x152x150	302x239x150
tank volume (L)	2,7 L	5,7 L	9,6 L
ultrasonic power (W)	160	240	320
frequency (kHz)	37	37	37
heating power (W)	150	270	310
max. heating (°C)	80	80	80
heating accuracy (°C)	± 1	± 1	± 1
time control (min)	1 - 60	1 - 60	1 - 60
drainage valve	N/A	N/A	yes
standard accesories	basket & lid	basket & lid	basket & lid



## ULTRASONIC CLEANERS "with sweep & degass & pulse functions"

> These ultrasonic cleaners are features with "sweep", "degass" and "pulse" functions. Most specks are similar to standard ultrasonic cleaners.

> They also offer ideal solutions for intensive and gentle cleaning of glassware, metal parts, electronic components, instruments.

> Featured with robust stainless steel vibration tank and housing with handled to carry on both sides. Tubs made of cavitation - proof stainless steel.

Assures uniform, precision cleaning over the entire surface, and consistent cavitation that reaches and cleans even tiny crevices on the parts.

Memory function keeps settings in memory for frequent and repeated operations.

> Pause function gives an option to pause and re-start the operation at any desired moment.

➤ High heating performance ensures short warm-up period. Heating can be controlled up to 80°C with 1°C increments.

Time control is possible between 1-60 minutes with 1 minute increments.





# ULTRASONIC CLEANER DETERGENT

► Higly effective special cleaner for cleaning items in ultrasonic baths intensively.

▶ Removes distillation deposits, tars, grease, resins, adhesives, fats, oils, metal oxides, mineral dirt and similar soiling without leaving traces only with consumption of less than 2 % of the tank volume.

> Supports ultrasonic cleaning process, ideal for washing operations which are normally too difficult for ultrasonics alone.

Extremely gentle on ware with almost neutral pH value. Fully water soluble, low-foaming, low phosphate content, non-combustible, no gas formation, non-toxic, biodegradable.

> Although can be used cold water, using in hot water intensifies and accelerates the cleaning effect.

catalogue	pack	pack
number	specs	quantity
621.01.101	P.P bottle	1 L



BRUSH "for intensive cleaning"

> Specially recommended for all applications which require intensive cleaning.

> Brush part consists a mixture of natural hair and very soft bristles providing long lasting trouble free life cycle.

> Ergonomic handle offers the best grip option.

> Can also be used for cleaning larger surfaces such as benches, floor.

pack quantity
1 piece

## TISSUES - "cellulose" - "paper"

> Manufactured from non-chlorine bleached cellulose as double ply sheets with 195 x 195 mm dimensions.

> Ultra soft, chemically inert, highly absorbent and low lint cellulose offers the best reliable results.

> Specially recommended for wiping and cleaning of labware and also for other use such as cleaning pipettes and slides, wiping small amounts of liquids etc.

Supplied in a handy dispenser box for hygienic	catalogue number	pack quantity
storage and easy removal.	080.65.002	100 pieces

#### **CLEANING TOWEL**

Manufactured from pure cellulose with high degree of water absorbtion.

 Offers cost effective solutions to other alternatives.

High capacity water absorbtion level guarantees multi-usage of these towels.

Cut and packed according to the interior dimensions of the towel dispenser.

catalogue	towel	pack
number	dimensions	quantity
080.65.004	230 x 220 mm	200 pieces



BRUSH

"for dish washing"

applications such as dish washing and

> Brush part consists several layers of

sponges with different density and also a

Specially recommended

intensive cleaning of large surfaces.

scrubbing layer at the bottom line.

Handle offers the best grip option.

>

catalogue number

071.06.002

all

for

pack

quantity

1 piece



#### WIPES - "microfibre"

> Manufactured from microfibre textile with high tensile strength with 300 x 400 mm dimensions.

Specially recommended for lifting and trapping dirt from surfaces for fast and efficient cleaning. No chemicals are required during cleaning.

Absorbs and retains up to 8 times its weight. Can be washable hundreds of times without getting tired.

Supplied as two wipes: one for glass surfaces, the other for general use.

catalogue	pack
number	quantity
071.07.003	set of 2



## **TOWEL DISPENSER**

Designed to be used with paper towel dispensers. Can carry 200 towels at one time.

Paper towels can be pulled from the bottom part for fast and easy dispense.

 Acrylic front panel enables visual control of the towel quantity.

Can be easily mounted on the wall for practical use.

catalogue number	dimensions	pack quantity
080.67.001	266 x 287 x 107 mm	1 piece



TRAYS - "polypropylene"

Manufactured from polypropylene for multi-purpose use. Injection moulded as one piece, durable and featured with a strong rim around the body.

> Usable with food-stuff, hygienic and easy to clean. Easily stackable for reducing storage space.

catalogue number	base dimensions	height	pack quantity
062.40.901	183 x 127 mm	50 mm	1 piece
062.40.902	255 x 180 mm	60 mm	1 piece
062.40.905	355 x 245 mm	70 mm	1 piece



catalogue number

062.42.910

062.42.915

062.42.920

> Buckets with lid are manufactured from polypropylene. Featured with a sturdy carry handle for easy lift and with a lid for complete closure of the bucket.

catalogue number	volume	top dia. x height	pack quantity
062.60.901	1 L	120 x 122 mm	
062.60.902	2L	165 x 138 mm	10 pieces
062.60.903	ЗL	190 x 132 mm	10 pieces
062.60.905	5L	210 x 171 mm	10 pieces
062.60.909	9L	259 x 226 mm	10 pieces
062.60.918	18 L	310 x 275 mm	10 pieces

catalogue number	volume	top dia. x height	pack quantity
062.61.909	9L	265 x 250 mm	1 piece
062.61.914	14 L	302 x 295 mm	1 piece



height

50 mm

50 mm

pack quantity

1 piece

1 piece



## SAFETY BOXES

Manufactured from polypropylene according to UN3291 standard. Labelled according to international standards. Resistant to solvents. Thick wall offers puncture resistance to all means.

Ideal to safe disposal of contaminated products such as needles, syringes, lancets etc.

> For safety reasons the main lid is permanently locked and sealed once pressed on the body. Lid provided with a built-in flat opening for waste entry having a temporary and permanent closing system.

catalogue number	volume	dimensions	pack quantity
062.80.901	1.3 L	70 x 115 x 165 mm	1 piece
062.80.903	3.0 L	180 x 215 x 110 mm	1 piece
062.80.905	5.0 L	175 x 215x 185 mm	1 piece
062.80.912	12.0 L	225 x 270 x 265 mm	1 piece
062.80.925	25.0 L	270 x 300 x 435 mm	1 piece



# TRAYS - "stainless steel"

Manufactured from high quality, chemical and corrosion resistant AISI 304 grade stainless steel for multipurpose use.

 Robust and seamless construction guarantees long life cycle. Smooth polished surfaces provide fast and easy cleaning.

> base dimensions

400 x 500 mm

450 x 600 mm

# GOGGLE



Comfortable, ergonomically designed goggle offers unrestricted 180° panaromic visibility. Also suitable for wearing over prescription spectacles.

 Ultra clear, stratch-proof, anti- fog visor guarantees very high mechanical stability.

> Provides a modern styling in combination with comfort. Offers supreme wearing comfort due to the light body.

Can be adjusted quickly providing reliable all-round protection. Adapts to individual face curvature providing complete side protection

catalogue	pack
number	quantity
080.40.007	1 piece



Additional ventilation via integrated air channels enables optimal indirect ventilation ensuring mist-free usage.



# SAFETY SPECTACLES

Manufactured from ultra clear, impact resistant, UV protected polycarbonate according to CE EN166 standard.

Sporty and modern design with high mechanical strength.

Featured with a clear stratch-proof, anti-fog, lens with 100% UV protection.

 Large panaroma lens offer 180° extreme broad field of vision.

 Offers supreme wearing comfort with 18 gram light weight.

 Ergonomically design and slim nose bridge offers perfect fit.

 Different frame colors offer visual sorting and better organising.





spectacle	spectacle	spectacle	spectacle	pack
blue frame	purple frame	ruby frame	green frame	quantity
080.40.002B	080.40.002P	080.40.002R	080.40.002G	1 piece




### SAFETY SPECTACLES

Manufactured from ultra clear, impact resistant, UV protected polycarbonate according to CE EN166 standard.

Ergonomic design guarantees perfect fit. Large panaroma lens offer 180° extremely broad field of vision.

Recommended for factory visits, assembly lines and laboratory routine work. Suitable for wearing over common prespriction spectacles.

➤ Guarantees full protection including eyebrow and eye sides. Offers supreme wearing comfort with 39 gram light weight.



spectacle	pack
clear lens	quantity
080.40.003	1 piece







## SAFETY SPECTACLES










# cleaning & safety & protection & sterilization SAFETY SPECTACLES



> Manufactured from ultra clear, impact resistant, UV protected polycarbonate according to CE EN166 standard.

► Featured with a clear stratch-proof, anti-fog, lens with 100% UV protection.

> Offers modern styling and very high mechanical strength and full protection to eyes with wide curved lens.

Ergonomic design guarantees perfect fit. Large panaroma lens offer 180° extremely broad field of vision. Offers supreme wearing comfort with 27 gram light weight.

> 30 degree up/down movable side arm also guarantees the optimum lens angle adjustment for the best configuration.


Featured with side arm length adjustment with integrated stop lock for perfect fit of the spectacle to the face.

Soft silicone ear pads at the side arms offer supreme wear comfort and pressure-free fit. Soft silicone nose loops prevent sliping and ensure comfortable sit on the nose.


> Spectacle with a dark lens offers UV 400 protection against direct sunlight exposure.

Spectacle with a yellow lens offers UV 254 protection against laser and UV light.

spectacle	spectacle	spectacle	pack
with clear lens	with dark lens	with yellow lens	quantity
080.40.001	080.40.011	080.40.021	1 piece



3 step side arm length adjustment for perfect fit to the face and optimum coverage of the eyes.



Soft silicone ear pads at the side arms offer supreme wear comfort and pressure-free fit.



Manufactured from ultra clear, impact resistant, UV protected polycarbonate according to CE EN166 standard. Ergonomic design guarantees perfect fit.

► Featured with a clear stratchproof,anti-fog, lens with 100% UV protection. Guarantees full protection of eyes including eyebrow and eye sides.


> Offers supreme wearing comfort with 27 gram light weight. Large panaroma lens offer 180° broad field of vision.

> 30 degree up/down movable side arm also guarantees the optimum lens angle adjustment fort he best configuration.

> Featured with side arm length adjustment with integrated stop lock for perfect fit of the spectacle to the face and optimum coverage of the eyes.

> Soft silicone ear pads at the side arms offer supreme wear comfort and pressure-free fit.

spectacle clear lens	pack quantity
080.40.004	1 piece



30 degree up/down movable side arm also guarantees the optimum lens angle adjustment.



#### **SAFETY SHIELD**

> Manufactured from polypropylene with integrated forehead safety cover.

 Provides excellent protection of full face against chemical splashes and flying objects.

▶ 1,5 mm thick fold-up protective visor manufactured from ultra clear acylate with extra clear vision in all angles.

> Can be worn on the masks, goggles and spectacles. Ultra light weight guarantees full comfort.

 Rotating fastener for easy and fast adjustment to individual head shapes and sizes.

Variable lift-up mechanism with locking option at any desired position and angle offers practical use.

 Soft sweat band eliminates sweat drops and offers comfortable use.

catalogue	pack
number	quantity
080.40.010	1 piece



Variable lift-up mechanism with locking at any position. Soft vinyl band offers comfortable use.





#### EAR PLUGS

> Manufactured from non-allergic, very soft, comfortable to wear PU foam with excellent sound insulation.

> Unique design offers wearing comfort even when worn extended hours.

Optimised bell shape guarantees perfect fit even to ears with smaller audotory canals with a simple insertion.

Once used seals the ear channel without the risk of slipping out.

Featured with a cord fixing two plugs each other reducing the risk of loss. Easy to store when not in use.





directions by swivel mechanish





#### EAR MUFF

Low weight ear muff consists of two part ear pad with well ventilated and soft cushions.

> Offers perfect noise isolation and protection in extremely noisy environments.

> Steel suspentions headband system resistant to bending and providing comfortable pressure on ears.

 Quick-click adjustment enables headbands to adapt quickly to all head shapes and sizes and offers exceptional wearing comfort.

> Ear pads can be folded when not in use for protection against dust and other effects.

catalogue	pack
number	quantity
069.04.002	1 piece

# LED LIGHT SOURCE

 Offers perfect illumination at dark working environments.

Featured with a side clamp for easy and practical attachment of the light source to spectacles.

 Supplied with easily replaceable batteries with long life cycle.

catalogue	pack
number	quantity
069.03.005	1 piece

# A Survey of the second





# cleaning & safety & protection & sterilization

## **CLEANING TISSUES**

➤ Manufactured from very thin best quality paper based on 100 % manile fibre. Cut with dimensions 100 x 150 mm.

Guarantees fast and very effective cleaning of spectacles, goggles, microscope objectives, binoculars and all similar optical lens involved items.

> Never leaves any fibers or dust on the cleaned surface.

> These papers never scratches and damages the surfaces. They guarantee non-abrasive cleaning.

> Supplied in a handy booklet of 100 tissue sheet for hygienic storage and for easy dispensing.

catalogue number	dimensions	pack quantity
080.65.003	100 x 150 mm	1 booklet

# **ULTRASONIC BATH**

Designed for intensive and gentle cleaning of small size objects such as spectacles.

 Assures uniform, precision cleaning over the entire surface.

Featured with a digital LED panel for set & actual time.

catalogue no	621.08.001
ext. dimensions (mm)	205 x 145 x 125
tank dimensions (mm)	168 x 110 x 52
tank volume (L)	0,6
voltage (V)	110 - 220
frequency (Hz)	50/60
ultrasonic power (W)	35
frequency (kHz)	42
time control (sec)	60/120/180/240/300

# **ANTIFOG SET**

> Offers 24 hour protection against fogging and keeps the spectacles always with a clear visibility.

> Set consists of 1 x spray unit with antifogging solution and 1 x cleaning ped.

➤ The application is very simple and effective. Just press the vaporisation button of the spray unit and spead of the antifogging solution all over the spectacle lens.

> Than wipe and clean the lens with the help of the provided cleaning ped.

catalogue	pack
number	quantity
080.40.102	1 piece



## CABINET

Manufactured from crystal clear acylic with excellent field of vision for storing spectacles.


 Guarantees safe storage of spectacles from dust and other enviromental effects.

Also can be used to store similar size of other type objects. 5 shelves with generous openings provide easy and safe access to partitions.

Cover is featured with easy opening hinged lid. Magnetic clasp on the lid guarantees safe closure of the cabinet.

Once opened, the lid stands open and enables easy filling and dispensing.

 Delivered with necessary attachment screws to be mount to the wall.



catalogue	shelf	external	pack
number q	uantit	y dimensions	quantity
080.40.101	5	110x260x400 mm	n 1 piece

## EYE WASH BOTTLES - "standard size"



Accidents can and do happen anytime. Every laboratory should have an emergency eye wash station for immediate access.

Body manufactured from flexible and easy to squeeze polyethylene. The spray head and other parts manufactured from polystyrene.

> The spray head fits securely around the eye socket to hold eyelid in an open position during application.

> Eye wash bottle with 660 ml volume capacity provides a soft, broad and effective spray with a single action.

> The spray head has a perforated plate to break up the stream providing a gentle spray to the eye.

> A capped air vent valve prevents drawback of the contaminated eye wash back to the reservoir.

> Snap-on cap covers the spray head in a hygienic way and guarantees perfect protection of inside from dust and other environmental effects.

> Contaminated used solution exits through a drain tube which rotates in any direction.

> Eye wash bottle filled with sterile saline solution

> Alternative 2 bottles:

Eye wash bottle filled with sterile neutralisation solution

catalogue number	solution descriptions	pack quantity
069.03.660		1 piece
069.04.660	with 4,9 % phosphate buffer neutralisation solution	1 piece

#### 069.05.660 / empty bottle without solution / 1 piece



Eye wash bottle provides a soft, broad and excellent, effective spray with a single action.



Snap-on cap covers the spray head in a hygienic way and guarantees perfect protection of inside.



Bottle can be used also even when the injured person is lying down with the help of a sliding valve.



The spray head has a perforated plate to break up the stream providing a gentle spray to the eye.



The spray head fits securely around the eye socket to hold eyelid in an open position during application.



Contaminated used solution exits through a drain tube which rotates in any direction with 180 degree.

# EYE WASH BOTTLES - "compact size"

Manufactured as a personal eye wash bottle for emergency use.

Ideal size for persons being frequently present in different risky working areas.

Compact size with 175 ml volume capacity offers easy carry in a jacket pocket.

The spray head fits securely around the eye socket to hold eyelid in an open position during application.

> Eye wash bottle provides a soft, broad and effective spray with a single action.

➤ The spray head has a perforated plate to break up the stream providing a gentle spray to the eye.

► A capped air vent valve prevents drawback of the contaminated eye wash back to the reservoir.

> Snap-on cap covers the spray head in a hygienic way and guarantees perfect protection of inside from dust and other environmental effects.

> Contaminated used solution exits through a drain tube which rotates in any direction.

> Eye wash bottle filled with sterile saline rinsing solution

> Alternative 2 bottles:

 Eye wash bottle filled with sterile neutralisation solution

catalogue number	solution descriptions	pack quantity
069.03.175	with 0,9 % saline rinsing solution	1 piece
069.04.175	with 4,9 % phosphate buffer neutralisation solution	1 piece

069.05.175 / empty bottle without solution / 1 piece

## sterile saline rinsing solution

> Sterile saline rinsing solution contains 0,9% sodium chloride. Helpful in rinsing away dust, debris and other harmful irritants.

> Does not involve any side effects since the pH value is similar to that of human tears.

Prevents the foreign bodies from sticking into the eye and causing serious harm.

> Does not contain pathogens that could cause infection, and will not damage eye or skin tissue during prolonged flushing.

# sterile neutralisation solution \_

> When acids and alkalis contact the eyes or skin damage can start immediately.

▶ pH neutralising solution contains a sterile 4,9% phosphate buffer solution.

> Helpful in rinsing and neutralisation of acids and alkalis and other chemical contaminants to a harmless level in a very short time period.

> It is recommended to rinse the eye with saline solution after treatment with pH neutralisation solution.





Compact size offers easy carry in a jacket pocket.

# BOTTLE STAND - "for eye wash bottle"





For keeping eye wash bottles always "ready-for-use" stage.

Keeps the bottle stable at his nest and guarantees easy and fast access to the bottle.

► Featured with a mirror and "how-to-use" instructions printed on the body.

User looks directly into a mirror during rinsing.

 Supplied with necessary screw set for mounting on the wall.

catalogue	pack
number	quantity
069.05.001	1 piece

User looks directly into a mirror during rinsing. Focusing on the mirror with the eye lid open helps overcome the blinking reflex.



GLOVES - "nitrile" - "0,06 mm standard thickness"

> Manufactured pure nitrile free from phthalate softeners and latex proteins which cause allergy to the skin.

Provides a standard thickness of 0,06 mm which is recommended for daily laboratory use.

 Classified as CE category 1. Tested an accordance with EN420:2003 standard.

➢ Provided with AQL 1,5 offering the highest level of protection according to EN374-2:2003 against penetration of microorganisms. 40 % more stronger and 60 % leaner than latex gloves.

 Provides full protection against wide range of chemicals including cylotoxic drugs.

Easy to wear. Unique production techniques offer excellent mechanical strength providing multi-use options.

> Excellent fit to the hands guarantees maximum comfort.

 Slightly textured finger parts guarantee excellent grip option.

catalogue number	size	color	AQL	length	thickness	pack quantity
080.15.001	Small (7)	purple	1.50	240 mm	0,06 mm	100 pieces
080.15.002	Medium (8)	purple	1.50	240 mm	0,06 mm	100 pieces
080.15.003	Large (9)	purple	1.50	240 mm	0,06 mm	100 pieces
080.15.004	X Large (10)	purple	1.50	240 mm	0,06 mm	100 pieces

#### GLOVES - "nitrile" - "0,12 mm extra thickness"

Manufactured pure nitrile free from phthalate softeners and latex proteins which cause allergy to the skin.

> Provides extra thickness of 0,12 mm which is recommended for daily laboratory use.

> Thick gloves are specially designed for life science, biomedical research, forensic science and drug handling applications.

# > Extra thickness guarantees extra safety.

 Classified as CE category 1. Tested an accordance with EN420:2003 standard. Provided with AQL 1,5 offering the highest level of protection according to EN374-2:2003 against penetration of micro-organisms.

► 40 % more stronger and 60 % leaner than latex gloves.

> Provides full protection against wide range of chemicals including cylotoxic drugs.

> Easy to wear. Unique production techniques offers excellent mechanical strength providing multi-use options.

> Excellent fit to the hands guarantee maximum comfort. Slightly textured finger parts guarantee excellent grip option.

catalogue number	size	color	AQL	length	thickness	pack quantity
080.16.001	Small (7)	blue	1.50	240 mm	0,12 mm	100 pieces
080.16.002	Medium (8)	blue	1.50	240 mm	0,12 mm	100 pieces
080.16.003	Large (9)	blue	1.50	240 mm	0,12 mm	100 pieces
080.16.004	X Large (10)	blue	1.50	240 mm	0,12 mm	100 pieces





#### how to measure the right glove size? -

You have to select the right size of glove for your hands for your comfort.
How you will select the right size of your glove? Measure the circumference of your dominant hand just below the fingers excluding the thumb. Compare the measurement to the size chart below to find your glove size.



#### GLOVES - "for safe handling"

> Manufactured from light weight 100 % cotton for multi-use. Unique design provides both left and right handed use.

> Easy to wear. Soft and flexible texture offers full comfort during use. Thick yet stretchable. Protects the sensitive skin.

> Makes unlined gloves easier to pull or to wear. Also prevents

from moderate levels of cold and heat. They are machine washable.

catalogue	total	pack
number	length	quantity
080.13.001	260 mm	1 pair

#### GLOVES - "for cold protection"

 Economical and practical glove specially designed to work in cold environments.

> Recommended to be used in cold treatment plants, handling dry ice, working with coolents.

 Offers full protection very against even cold temperatures such as -140°C.

> Easy to wear. Soft and flexible texture offers full comfort during use. Thick yet stretchable. Protects the sensitive skin.

> The outer part of the glove is covered with a heat repellent leather. While the inner part is featured with soft and flexible protective textile.

> Even working at very low temperatures with extended hours it still remains flexible.





#### GLOVES - "for cold protection"

Specially designed to work in hazardous ultra-cold enviroments. Recommended to be used in cold treatment plants, handling dry ice, working with coolents. Not immersion in liquid nitrogen.

> Multi-layer construction provides light weight and full comfort during use. State-of-art material is breathable and stays always comfortable and dry.

Offers full protection against even very cold temperatures such as -160°C. The innovative design offers superior thermal protection and maximum level of flexibility.

> Even working at very low temperatures with extended hours it still remains flexible.









#### GLOVES - "for heat protection"

> Manufactured from soft, flexible, heat resistant pliant terry cotton material.

Easy to wear. Soft and flexible texture offers full comfort.

The upper part is covered with a heat repellent material. While the palm part is manufactured from heat resistant soft and flexible leather.

Offers maximum isolation and protection up to for limited time 250°C when working with autoclaves and muffle furnaces.

Guarantees a long life cycle since they can be machine washable.

catalogue	total	pack
number	length	quantity
080.11.001	380 mm	1 pair





- GLOVES "nitrile" "for chemical protection"
- Manufactured from pure nitrile free from phthalate softeners and latex proteins.
- Classified as CE category III they can be used both at laboratories and industry.
- Offers excellent protection against alcohols, oils, greases, and hydrocarbons.
- > Provide superior mechanical resistance against abration and perforation.

 Excellent fit and flexible texture offers full dexterity and comfort during use.

- Cotton flock liner inside the glove absorbs moisture and prevents sweating during use.
- Slightly textured fingers and palm guarantees excellent grip.

catalogue number	size	length	thickness	internal finish	external finish	pack quantity
080.21.007	7	320 mm	0,38 mm	flocked	embossed	1 pair
080.21.008	8	320 mm	0,38 mm	flocked	embossed	1 pair
080.21.009	9	320 mm	0,38 mm	flocked	embossed	1 pair

## GLOVES - "nitrile" - "for chemical protection"

- Manufactured from pure nitrile free from phthalate softeners and latex proteins.
- Classified as CE category III they can be used both at laboratories and industry.
- Offers excellent protection against alcohols, oils, greases, and hydrocarbons.
- > Provide superior mechanical resistance against abration and perforation.
- Excellent fit and flexible texture offers full dexterity and comfort during use.
- Cotton flock liner inside the glove absorbs moisture and prevents sweating during use.
- Slightly textured fingers and palm guarantees excellent grip.

catalogue number	size	length	thickness	internal finish	external finish	pack quantity
080.22.007	7	355 mm	0,85 mm	flocked	embossed	1 pair
080.22.008	8	355 mm	0,85 mm	flocked	embossed	1 pair
080.22.009	9	355 mm	0,85 mm	flocked	embossed	1 pair

#### GLOVES - "neopren" - "for chemical protection"

- > Manufactured from polychloroprene which can cause allergy to the skin.
- Classified as CE category III they can be used both at laboratories and industry.
- > Offer protection against semiconcentrated acids, concentrated bases, cocentrated saline solutions, glycerol, solvents, alcohols, fats and oils.

> Excellent fit and flexible texture offers full dexterity and comfort during use.

- Cotton flock liner inside the glove absorbs moisture and prevents sweating during use.
- Slightly textured fingers and palm guarantees excellent grip and handling option both for dry, wet and oily products.

catalogue number	size	length	thickness	internal finish	external finish	pack quantity
080.23.007	7	310 mm	0,55 mm	flocked	embossed	1 pair
080.23.008	8	310 mm	0,55 mm	flocked	embossed	1 pair
080.23.009	9	310 mm	0,55 mm	flocked	embossed	1 pair



#### GLOVES - "for thermal resistance"

- > Manufactured from nitrile foam. Suitable for handling hot objects up to 125°C. Also ideal for handling of materials after heat.
- Classified as CE category II they can be used both at laboratories and industry.
- > Thin anatomical shape ensures dexterity. Offers excellent fit to the hands.
- Nitrile spheres at the palm and finger parts guarantees perfect insulation with excellent grip option.

catalogue number	size	length	internal finish	external finish	pack quantity
080.26.007	7	280 mm	flocked	dotted	1 pair
080.26.009	8	280 mm	flocked	dotted	1 pair
080.26.010	9	280 mm	flocked	dotted	1 pair





GLOVES - "silicone"

Manufactured from best quality natural silicone resistant both to heat and cold.

► Guarantees excellent chemical and temperature resistance between -60°C to +170°C.

 Very flexible and slip-proof chracteristics guarantee easy and safe grip of all kinds of flasks and vessels

catalogue number	glove type	pack quantity
080.18.001	for 5 fingers	1 piece
080.18.002	full hand	1 piece







## **HEAT PROTECTOR**

> Manufactured from natural silicone for protecting fingers. Resistant both to heat and cold.

 Offers excellent chemical and temperature resistance between -60°C to +170°C.

 They offer a practical and economical alternative to gloves.

Very flexible and slip-proof chracteristics guarantee easy and safe grip of all kinds of flasks and vessels.



# DISPENSER BOX - "for nitrile glove boxes"

Manufactured from crystal clear acrylic with excellent field of vision for storing and dispensing nitrile glove boxes.

 Perfect tools for storing and easy dispensing 4 different sizes gloves simultaneously.

➤ 4 compartments with easy inserts perfectly fit to the outer dimensions of the extra thick glove boxes and holds them stable at their positions.


 Designed for use either on desk top or wall mounted. Delivered with necessary attachment screws to be mount to the wall.

Alternative 2 box size:

box for standard gloves
 box for thick gloves

Box for standard gloves can also accomodate the cleaning tissue box catalogue number 080.65.002.

catalogue number	dimensions	for gloves	pack quantity
080.05.001	215 x 70 x 465 mm	standard	1 piece
080.05.002	260 x 85 x 525 mm	thick	1 piece



133



## **HEAT PROTECTOR**

> Manufactured from natural silicone for protecting hands. Resistant both to heat and cold.

 Offers excellent chemical and temperature resistance between -60°C to +170°C.

 They offer a practical and economical alternative to gloves.

Very flexible and slip-proof chracteristics guarantee easy and safe grip of all kinds of flasks and vessels.



## **VISITORS GOWN**

> Shirt collar design visitors gown without hood and without pockets. Closure is provided with snap fasterners.

> Featured with rubber fasteners at wrist. For single use. Manufactured for visitors protection at laboratories.

 Slightly porous texture of the textile guarantees air permability and prevents sweating during use.

Light weight. Easy to wear. Soft and flexible texture offers full comfort during use. Universal cut for fitting all body sizes.

catalogue number	pack quantity	C
080.50.001	1 piece	0



CAPS

 Manufactured from breathable, antistatic non-woven fabric. Fully protects hair prom dust and other particles.

catalogue	pack
number	quantity
080.53.001	100 pieces



## **PROTECTOR SUIT**

> Overall design protective suit with hood and without pockets. Closure is provided by zipper. Featured with rubber fasteners at wrist.

> For single use. Manufactured for employees and visitors protection at laboratories.

> Slightly porous texture of the textile guarantees air permability and prevents sweating during use.

Light weight. Easy to wear. Soft and flexible texture offers full comfort.

catalogue	pack
number	quantity
080.50.011	1 piece



# **OVER SHOES**

> Manufactured from polyethylene for disposable use. Guarantees clean and sterile environment once worn on the shoes.

catalogue	pack
number	quantity
080.53.021	100 pieces



#### **PROTECTOR SUITS - 5/6**

Manufactured from high density antistatic polyethylene, providing an ideal balance of protection, durability and comfort.

Offers chemical protection according to category III (type 5 & 6). Also offers an excellent barrier against fine particles down to 1 micron size.

 Protective suit with overall design perfectly suitable for clean room areas.

 Also practical use at pharmaceutical handling and many others.

 Guarantees air permeability and prevents sweating during use. Repels water based liquids and aeresols.


> Optimised body fit provides excellent wearer comfort. Featured with hood compatible with filtering face masks.

 Featured with rubber fasteners at wrist and around face.

 Closure is provided by auto-lock zipper with flap for increased protection.

Light weight. Easy to wear. Flexible texture offers full comfort during use.

catalogue number	size	pack quantity
080.51.003	Medium	1 piece
080.51.004	Large	1 piece
080.51.005	X Large	1 piece
080.51.006	XX Large	1 piece

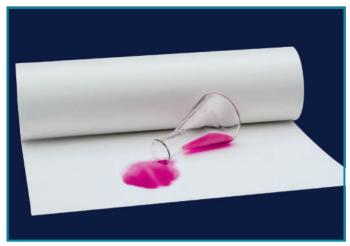

# DESK PROTECTOR - "paper"

➤ A practical desk protector offering full protection of desks against spilled solutions. Quickly absorbs liquids and keep spills from spreading. Absorbs up to 750 ml/m² Their thick protective layer eliminates the risk of glass breakage in case tilt over.

Thick and very absorbent paper layer soaks the spilled liquids and protects the laboratory desks.

> Consists of 2 layers:

Flexible, water-proof polyethylene layer prevents the spilled liquid penetration to the laboratory desk.

> Supplied as a roll of 50 meters length with 46 cm width.

catalogue	pack
number	guantit
080.66.001	1 piece




#### **DESK PROTECTORS - "cork"**

> Manufactured from non-porous, additive free, best quality natural cork for protection of laboratory desks. Offers full protection against over heated flasks.

> Their thick protective layer eliminates the risk of glass breakage in case tilt over. Their light yet robust construction also significantly reduce vibration effects and noise.

catalogue number	dimensions	thickness	pack quantity
080.66.002	200 x 200 mm	10 mm	1 piece
080.66.003	300 x 300 mm	10 mm	1 piece

# cleaning & safety & protection & sterilization

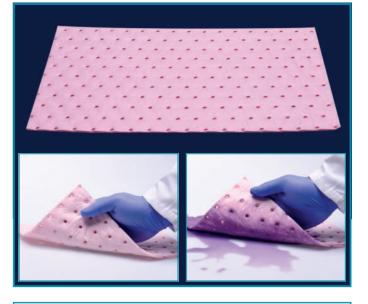


## **CHEMICAL PADS**

> Due to their microfibre structure they provide excellent absorbtion capacity. Consists of 8 layer highly absorbant fibers which altogether "imprisons" the liquids and never returns back.

Quickly absorbs the spills of all kinds of liquids including water based liquids, solvents, alcohols, acids and alkalis and stores them absorbed. The absorbed liquid can be extracted to be used again or to be disposed of separately.

catalogue	pad sheet	thickness	pack
number	dimensions		quantity
080.76.001	50 x 40 cm	3.4 mm	10 pieces



## DESK PROTECTORS - "silicone"

Manufactured from best quality natural silicone resistant both to heat and cold. Guarantees excellent chemical and temperature resistance between -60°C to +170°C.

Very flexible and slip-proof chracteristics guarantees safe hold of all flasks and also instruments. They offer full protection of desks against spilled solutions and over heated flaks.

catalogue number	dimensions	specification	pack quantity
080.66.005	240 x 240 mm	corrugated surface	1 piece
080.66.006	340 x 340 mm	corrugated surface	1 piece



DUST MASK - "FFP-1"

> Offers protection against non-toxic harmful solid and liquid in concentrations up to 4 x OEL or 4 x APF.

> Specially recommended for calcium carbonate, china clay, cement, cellulose, cotton, sulfur, ferrous metals and foods.

Convex design, aluminium nosepiece and adjustable fitting straps guarantee excellent fit to different face shapes.

Light weight provides strain and fatigue free use even with extended hours.

Inner and external layers of the mask manufactured from soft microfiber.

catalogue	pack
number	quantity
080.41.001	10 pieces







#### DUST MASK - "FFP-2"

➤ Offers protection against low-toaverage toxic solids, liquids and smoke up to 12x OEL or 10 x APF.

Addition to FFP-1 protection limits also offers protection against glass wool, mineral oils, most bacterias and fungi.

Convex design, aluminium nosepiece and adjustable fitting straps guarantee excellent fit to different face shapes.

Exhalation valve significantly minimise warm and humid airflow into the mask.

> Other thecnical properties are same with "FFP-1" dusk mask.

catalogue	pack
number	quantity
080.41.002	10 pieces

#### MASK - "half face"

Designed and manufactured according to DIN EN 140 and AS/ NZS 1716 standards for protection of mouth and nose.

All parts contacting with the face are manufactured from silicone.

Cool flow valve prevents buit-up heat in the mask.

Soft silicone facepiece perfectly fits to the contours of the face without pressure points providing full comfort.

> Filter system with exchangeable cartridge filter ensures low breathing resistance.

Supplied with a multiple gas cartridge for protection from dust, fine particles, mist, smoke, organic vapours and gases with boiling point 65°C or above.

catalogue number	product descriptions	pack quantity
number	descriptions	quantity
080.44.001	half face mask	1 piece
080.44.101	spare gas cartridge	1 piece



#### DUST MASK - "FFP-3"

Offers protection against highly toxic solids, liquids and smoke up to 50 x OEL or 20 x APF.

Addition to FFP-2 protection limits also offers protection against heavy metal particles, smokes and odores and viruses.

Convex design, aluminium nosepiece and adjustable fitting straps guarantee excellent fit to different face shapes.

 Exhalation valve significantly minimise warm and humid airflow into the mask.

 Other thecnical properties are same with "FFP-2" dusk mask.

catalogue	pack
number	quantity
080.41.003	10 pieces

#### MASK - "full face"

 Designed and manufactured according to EN 136:1998 for protection of full face.

 Featured with anti-stratch, antifogging, distotion-free polycarbonate shield.

 Cool flow valve prevents buit-up heat in the mask.

Soft silicone facepiece perfectly fits to the contours of the face without pressure points providing full comfort.

> Filter system with exchangeable cartridge filter ensures low breathing resistance.

Supplied with a multiple gas cartridge for protection from dust, fine particles, mist, toxic smoke organic or inorganic vapours and gases with boiling point 65°C or above, sulfur dioxide, acidic gasses and ammonia gas.

catalogue number	e product descriptions	pack quantity
080.45.001	full face mask	1 piece
080.45.101	1 spare gas cartridge	1 piece









LAB 200 50 ml





# density & sedimentation & temperature & time & pH & weight measurement



#### **THERMOMETERS - "glass"**


Manufactured from solid stem glass rods with approximately 75 mm immertion depth.

> Printed large graduation on the front wall offers easy temperature reading.

 Large alcohol column with red color enables easy and accurate readout.

> The amber front scale of the thermometer reflects the images more clearly.

THERMOMETER CLAMP "with bosshead"	



Manufactured from high quality, corrosion resistant chromated steel for holding thermomeres in the most secure way.

➤ Featured with a swivel bosshead which provides 360° swivel of the clamped object around their axis.

Bosshead locking feature guarantees perfect position hold of the clamped objects.

> Fixing head featured with flexible springs offers easy insertion and extraction of the thermometers.

> Clamps can be opened and closed smoothly with a 30 mm grip diameter.

Other technical specifications can be seen at catalogue page no 51.

catalogue number	operation range °C	subdivision	pack quantity
059.02.001	-20/+50	1°C	10 pieces
059.02.002	-20/+110	1℃	10 pieces
059.02.003	-10/+150	1°C	10 pieces
059.02.004	-10/+200	2°C	10 pieces

**STAND** 



Manufactured from acrylic for holding 72 thermometers in 12 x 6 array.

 Handles at both sides guarantee easy hold and secure grib.

 Adjustable height upper layer provides multiuse options with shorter objects.

catalogue number	dimensions	pack quantity
059.05.001	210 x 110 x 220 mm	1 piece



Adjustable height upper layer provides multi use options with shorter objects.

# density & sedimentation & temperature & time & pH & weight measurement



#### THERMOMETER "portable"

For temperature measurement in liquids, semi-solids. Specially offers practical solutions with foodstuff.

Stainless steel probe with 127 mm length can easily be inserted into semisolid samples.

➤ Offers temperature measurement on a large and clear 19 x 8 mm LCD display.

 Water resistant sturdy plastic housing offers long life cycle.

➤ Temperature measurement range is -58°F to +158°F (+/- 0,2°F) or -50°C to +300°C (+/- 0,1°C) selectively.

°F & °C values are exchangeable by a switch control at the front panel.

 Supplied with a plastic sleeve for the protection of the measuring probe.

catalogue	pack
number	quantity
060.01.001	1 piece





#### THERMOMETER "portable"

► For temperature measurement in liquids, semi-solids. Specially offers practical solutions with foodstuff.

> Stainless steel probe with 120 mm length can easily be inserted into semisolid samples.

 Offers temperature measurement on a large and clear 34x14 mm LCD display.

 Water resistant sturdy plastic housing offers long life cycle.

➤ Temperature measurement range is -58°F to +572°F (+/- 2°F) or -50°C to +300°C (+/- 0,5°C) selectively.

°F & °C values are exchangeable by a switch control at the front panel.

> Supplied with a plastic sleeve for the protection of the measuring probe.

catalogue	pack
number	quantity
060.01.002	1 piece





#### THERMOHYGROMETER "portable"

> Pen shape, thermohygrometer is featured with a rotary probe enabling fast readings.

Water resistant sturdy plastic housing with 138 mm length offers long life cycle.

 Featured with a clips for safe and practical use.

 Offers dual display for humidity and temperature on a large and clear 52 x 13 mm LCD display.

Featured with maximum & minimum reading memory.

Humidity measurement range is 20% RH – 95 %RH with +/- 3%RH accuracy.

➤ Temperature measurement range is 32 - 122°F (+/- 2°F) or 0 - 50°C (+/- 1°C) selectively.

▶ °F & °C values are exchangeable by a simple switch control at the back.

catalogue	pack
number	quantity
060.03.002	1 piece



THERMOMETER - "desk-top"

> This desk top electronic thermometer can be also used as wall hanged. With the help of two probes can be used for indoor and out-door temperature measurement simultaneously.

> The folding stand at the back housing offers a convenient angle for easy reading of the results.

> Water resistant sturdy plastic housing with 135 x 75 x 19 mm dimensions offers long life cycle.

> Offers dual display for humidity and temperature on a large and clear 51 x 41 mm LCD display.

> Featured with maximum & minimum temperature reading memory with an alarm function and date / time display.

► Temperature measurement range is -4°F to +122°F (+/- 0,2°F) or -20°C to +50°C (+/- 0,1°C) selectively.

°F & °C values are exchangeable by a switch control at the front panel.

catalogue	pack	
number	quantity	
060.02.001	1 piece	





#### THERMOHYGROMETER - "desk-top"

> This desk top thermohygrometer can be also used as wall hanged. The folding stand at the back housing offers a convenient angle for easy reading of the results.

> Water resistant sturdy plastic housing with 109 x 70 x 19 mm dimensions offers long life cycle.

> Offers dual display for humidity and temperature on a large and clear 40 x 30 mm LCD display.

> Featured with maximum & minimum temperature reading memory with an alarm function.

➤ Humidity measurement range is 10% RH – 99 %RH with +/- 5%RH accuracy.

➤ Temperature measurement range is -58°F to +158°F (+/- 0,2°F) or -50°C to +70°C (+/- 0,1°C) selectively.

▶ °F & °C values are exchangeable by a switch control at the front panel.

talogue umber	pack quantity
.03.001	1 piece

THERMOMETER - "with foldable probe"

> For temperature measurement in liquids, semi-solids. Specially offers practical solutions with foodstuff.

> Featured with a foldable stainless steel probe with 85 mm length which can move 180° angle. Probe can easily be inserted into semi-solid samples.

 Offers temperature measurement on a large and clear 15 x 30 mm LCD display.

Temperature measurement range is -58°F to +482°F or -50°C to +250°C with +/- 0,1 resolution.

°F & °C values are exchangeable by a switch control inside the battery cover.

Water resistant sturdy plastic housing offers long life cycle.

catalogue	pack
number	quantity
060.01.003	1 piece



### THERMOMETER - "wireless" - "max. & min."

This thermometer is suitable both for out-door or in-door applications. Shows also time and date simultaneously.

> Maximum and minimum temperature values can also be seen by a selectible switch.

> Featured with a wireless measurement transmitter that can be used up to 60 meters (free field) to the thermometer body.

> Can display in-door and out-door temperature. °F & °C values are selectible by a switch at the front panel.

Offers a in-door temperature measuring range from -10°C (+ 14°F) to +60°C (+140°F) with a precision of +/- 1°C (+/-2°F)

Offers a out-door temperature measuring range from -40°C (-58°F) to +70°C (+158°F) with a precision of +/- 1°C (+/- 2°F)

Featured with a push buttons switchs for resetting, °C or °F selection, maximum or minimum reading setting.

Can be hanged on walls or can can be used as desk-top with it's inclinable support at the back side of the body.

catalogue	pack
number	quantity
059.03.003	1 piece



Featured with a wireless measurement transmitter that can be used up to 60 meters (free field) to the thermometer body.



### THERMOMETER - "max. & min." - "humidity"

> Suitable both for out-door or in-door applications. Weather resistant, robust housing is featured with an inclined shelter for further protection.

> Can measure and display in-door temperature and humidity plus out-door temperature.

Offers 3 parameters

Can be h can stand In-door temperature
 Out-door temperature
 %RH humidity

> Can also records and shows the maximum and minimum values of temperature and humidity selectively.

 Offers a in-door temperature measuring range from -10°C (+14°F) to +50°C (+122°F) with a precision of +/- 1°C (+/- 2°F)

 Offers a out-door temperature measuring range from -50°C (-58°F) to +70°C (+ 158°F) with a precision of +/- 1°C (+/- 2°F)

Offers a in-door humidity measuring range from 20% RH to 99% RH with a precision of +/- 5% RH.

> Featured with push buttons switchs for °C or °F selection and maximum or minimum temperature.

nanged on walls or	catalogue	pack
on a bench.	number	quantity
	059.03.004	1 piece



STOPWATCH - "mechanical"

> This classical stopwatch with mechanical winding system can be used even in extreme conditions.

► Provides time counting up to 30 minutes with 0,2 second resolution.

> Chrome plated sturdy housing provides resistance to sudden impacts and guarantees long life cycle.



STOPWATCH - "electronic"

> Electronic stopwatch offers counting up to 59 minutes, 59 seconds with 0,01 second resolution.

Offers long life cycle and easy use with it's water resistant sturdy plastic housing and light weight.

As a time recorder
 3 functions: As a chronometer
 As a 24 hour timer with alarm function.



#### TIMER - "mechanical"

 Mechanical timer counts up to 60 minutes with 1 minute resolution.

> No need for batteries. Just winding will be enough to start the time counting.

> A clear bell ring signals at the end of the preset time. Can be interrupted during work and reset any time.

Can be used on bench top or also can be hanged to any smooth surface.

catalogue number	diameter	pack quantity	catalogue number	dimensions	pack quantity	catalogue number	dimensions	pack quantity
055.01.001	50 mm	1 piece	055.02.001	63 x 76 x 20 mm	1 piece	056.01.001	60 x 60 x 34 mm	1 piece

Can be or also ca smooth su



#### TIMER - "mechanical"

Mechanical timer counts up to 60 minutes with 1 minute resolution. Does not require batteries. Just winding will be enough to start the counting.

> A clear bell ring signals at the end of the preset time. Can be interrupted during work and reset any time.

catalogue number	dimensions	pack quantity
055.03.001	93 x 75 x 59 mm	1 piece



#### TIMER - "mechanical"

Mechanical timer counts up to 60 minutes with 1 minute resolution. A large screen with 150 mm diameter provides easy reading option from relatively long distances.

> Featured with a red marked area for remaining time for long distance observation.

used on bench top	catalogue	pack
In be hanged to any	number	quantity
urface.	055.04.001	1 piece





#### TIMER - "electronic"

Electronic timer counts up to 59 minutes, 59 seconds with a 4 digit display. Also featured with count-down function.

> A clear bell ring signals at the end of the preset time.

> A large LCD screen with 50 x 26 mm dimensions provides easy reading option from relatively long distances.

> The folding stand at the back housing offers a convenient angle for easy reading of the results. A clip at the back side of the watch enables easy wall mounting.

catalogue number	timer dimensions	screen dimensions	pack quantity
056.02.001	69 x 69 x 15 mm	50 x 26 mm	1 piece

TIMER - "electronic"

Electronic timer counts down with selected intervals of 10 seconds / 1 minute / 5 minute and 10 minute.

> A clear visual and audial signal flashes at the end of the selected time.

► LCD screen with 30 x 80 mm dimensions provides easy reading option from relatively long distances.

> The folding stand at the back housing offers a convenient angle for easy reading.

> A clip at the back side of the watch enables easy wall mounting. Can be hanged on metal surfaces with the two magnets provided at the back.

catalogue	timer	screen	pack
number	dimensions	dimensions	quantity
056.04.001	70 x 90 mm	30 x 80 mm	1 piece

TIMER - "electronic"

> Electronic timer counts up to 19 hours, 59 minutes with a 4 digit display for extended hours. Also featured with count-down function.

> A clear bell ring signals at the end of the preset time.

> A large LCD screen with 32 x 12 mm dimensions provides easy reading option from relatively long distances.

> The folding stand at the back housing offers a convenient angle for easy reading. Also featured with a clip at the back side.

catalogue	timer	screen	pack
number	dimensions	dimensions	quantity
056.03.001	53 x 62 x 12 mm	32 x 12 mm	1 piece



### METER - "portable" - "pH & mV & temperature measurement"



 Offers an economical solution for measuring pH & mV and temperature.
 Simple to calibrate by one keyboard.

Easy to replace electrode. The new electrode will be recognised automatically and shown at the display.

> Ergonomic, lightwight and waterproof (which can even float on water) housing enables perfect outdoor practice.

 Measured values are shown by a microprocessor based large LCD display.

> Meters are supplied in a sturdy carry case complete with hand held stripe, pH buffer solutions, cleaning solution, instruction manuel and other standard accesories.

 Stores maximum and minimum measured values in memory.

 Offers a switchable temperature selection of °C or °F.

 Featured with a low battery and energy consumption indicator.

> Automatic switch-off function closes the circuit after 10 minutes of non use.

> Supplied in a carring case, with instruction manual and calibration standard set.



рН	mV	Тетр
-2.00 / 16.00 pH	-1000 / 1000	0/90°C
± 0.01+1 digit	± 2 + 1 digit	±0.2 + 1 digit
0.01 pH	1 mv	0.1°C
0/90°C		
	-2.00 / 16.00 pH ± 0.01+1 digit 0.01 pH	-2.00/16.00 pH         -1000/1000           ± 0.01+1 digit         ± 2 + 1 digit           0.01 pH         1 mv

#### METER - "portable" - "pH & mV & temperature & conductivity & TDS & salt measurement"



Offers an economical solution for measuring pH & mV & temperature. & conductivity & TDS & salt with one single electrode.

 Ergonomic, lightwight and waterproof (which can even float on water) housing enables perfect outdoor practice.  Simple to calibrate by one keyboard. Memory function stores and recalls different measurements.

Microprocessor based large LCD displays show the measured values and the temperature simultaneously. For mV measurement 616.02.102 shold be used. ➤ Featured with automatic temperature compensation (ATC). Offers a switchable temperature selection of °C or °F.

Easy to replace electrode. The new electrode will be recognised automatically and shown at the display.

> Featured with a low battery and energy consumption indicator.

> Automatic switch-off function closes the circuit after 10 minutes of non use.

> Supplied in a carring case, with instruction manual and calibration standard set.



Meters are supplied in a sturdy carry case complete with hand held stripe, pH buffer solutions, cleaning solution, instruction manuel and other standard accesories.

catalogue no: 616.02.002	рН	mV	Тетр	Conductivity	TDS	Salt
	-2.00 / 16.00 pH	-1999 / 2000	0/110°C	0 / 199.9 µs	0 / 131.9 ppm	0/99.9 ppm
range				2.00 / 100.00 ms	1.30 / 13.19 ppt	10 / 50.00 ppt
accuracy	± 0.01+1 digit	±2+1 digit	±0,2 + 1 digit	±2%FS		
resolution	0.01 pH	0,1 / 1 mv	0.1°C	0.1 µS/0.01 mS 1 ppm/0.01 ppt		0.01 ppt
compensation	0/100°C			0/50°C		



	catalogue no: 616.11.001						
	pН	ORP	Тетр				
range	-2.00 / 16.00 pH	-1999/-200 mV -199.9/499.9 mV 500/2000 mV	0/110°C				
accuracy	± 0.01+1 digit	±2+1 digit	±0.2+1 digit				
resolution	0.01 pH	0.1/1 mv	0.1°C				
compensation	ATC: 0 / 100°C	N/A					

#### METERS - "table top"

 Featured with microprocessor based design and rugged housing with splash proof keyboard.

 Microprocessor based large LCD display enables fast and accurate measurements.

> Automatic calibration enables fast measuring cycles.

> Easy replacement of electrode and the type of the electrode would be recognised automatically and shown on the display during insertion.

> Can measure and display ( depending on model ) pH & mV & temperature & conductivity & TDS & salt & dissolved oxygen in seconds.

The large backlight LCD displays pH or mV or conductivity or TDS or salt or dissolved oxygen and temperature simultaneously.

Offers a switchable temperature selection of °C or °F.

> Featured with an automatic temperature compensation (ATC).

> Stores maximum and minimum measured values in memory. Memory function can keep and recall up to 150 data.

ORP probe is optional. Cat. No. 616.11.109.



Table top meters have a special platform with a magnetic stirrer which enables fast and accurate measurements and results.

Membrane keypad with large backlight LCD displays pH or mV or conductivity or TDS or salt or dissolved oxygen and temperature simultaneously.

	catalogue no: 616.12.001									
	pН	mV	Тетр	Conductivity	TDS	Salt	DO	<b>O2</b>		
range	-2.00 / 16.00 pH	-1999 / -200 mV -199.9 / 499.9 mV 500 / 2000 mV	0/110°C	0.0/199.9 μS 200/1999 μS 2.00/19.99 mS 20.0/100.0 mS		0.0 / 99.9 ppm 100 / 999 ppm 1.00 / 9.99 ppt 10.0 / 50.0 ppt	0 / 20.00 mg/L 0 / 20.00 ppm	0/200.0%		
accuracy	± 0.01+1 digit	± 2 + 1 digit	±1+1 digit		±2%FS		± 0.2 + 1 digit	±2%FS		
resolution	0.01 pH	0.1/1 mv	0.1°C	0.1µS/0.1mS	0.1 ppm / 0.1 ppt	0.1 ppm / 0.1 ppt	0.01 mg/L	0.10%		
compensation	ATC: 0 / 100°C	N/A		ATC: 0/60°C		ATC: 0/60°C MSC: 0/50 ppt MAC: 0/20000 ft				



Conductivity electrode Catalog No: 616.11.104

pH electrode Catalog No: 616.11.103









### pH BUFFER SOLUTIONS

> Ready to use pH buffer solutions at 20°C.

> Measured with a combination glass electrode after multiple point calibration with reference materials.

 It is certified traceable to the following National Institute of Standards and Technology (USA).

### pH BUFFER SOLUTIONS

➤ Ready to use pH buffer solutions with color coding, accuracy +/- 0,01 pH at 20°C. Traceable to NIST, packed in unique designed, practical twin-neck dosing bottles!

# > Unique and innovative design of the "twin neck" dosing bottles offers multiple advantages:

No need for a separate measuring container during calibration.

> No waste of buffer since exact and correct quantity of buffer is dispensed into the calibrating chamber at all times.

Ideally suited for field work and easy to carry.

#### Operation is simple, fast and easy;

> Open safety lock of the integrated calibration chamber.

> Fill calibration chamber from buffer resorvoir by pressing the bottle gently.

 Calibrate pH electrode then discard used buffer solution. Bottle is now ready for the following use.

catalogue number	pH range	color	volume	pack quantity
502.04.500	4.00	red	500 ml	1 piece
502.04.901	4.00	red	1000 ml	1 piece
502.07.500	7.00	yellow	500 ml	1 piece
502.07.901	7.00	yellow	1000 ml	1 piece
502.10.500	10.00	blue	500 ml	1 piece
502.10.901	10.00	blue	1000 ml	1 piece



catalogue number	pH range	thecnical specifications	volume (ml)	box quantity
908.B01.1000	1.00 ± 0.02	(hydrochloric acid, potassium chloride)	1000	1 piece
908.B02.1000	2.00 ± 0.02	(glycine, hydrochloric acid, sodium chloride)	1000	1 piece
908.B03.1000	3.00 ± 0.02	(potassium hydrogen phthalate, hydrochloric acid)	1000	1 piece
908.B04.1000	4.00 ± 0.01	(potassium hydrogen phthalate)	1000	1 piece
908.B05.1000	5.00 ± 0.01	(potassium hydrogen phthalate, 1m sodium hydroxide.)	1000	1 piece
908.B06.1000	6.00 ± 0.01	(potassium di-hydrogen orthophosphate, disodium hydrogen orthophosphate)	1000	1 piece
908.B07.1000	7.00 ± 0.01	(potassium di-hydrogen phosphate, disodium hydrogen phosphate)	1000	1 piece
908.B08.1000	8.00 ± 0.01	(di-sodium tetraborate, 1m hydrochloric acid)	1000	1 piece
908.B09.1000	9.00 ± 0.01	(di-sodium tetraborate, 1m hydrochloric acid.)	1000	1 piece
908.B10.1000	10.00 ± 0.01	(di-sodium tetraborate, 1m sodium hydroxide)	1000	1 piece
908.B11.1000	11.00 ± 0.05	(glycine, sodium chloride, sodium hydroxide)	1000	1 piece





#### LITHMUS PAPERS - "red & blue"

Lithmus papers are the simplest and easiest way to measure pH values where no precise pH value is required. They are usefull for determining whether a solution is acidic or basic.

The red lithmus paper has a pH measurement range 5.0 pH 

The blue lithmus paper has a pH measurement range 8,0 pH to 5.0 pH. The color changes from blue  $\rightarrow$  red

Packed as a booklet of 20 papers. 10 booklets are	catalogue number
packed in a polystyrene box	101.01.00
for for easy dispensing.	101.01.00

catalogue number	paper type	pack quantity
101.01.001	red	10 booklets
101.01.002	blue	10 booklets

#### pH PAPER - "universal" - "roll"

Most commonly used pH papers for a wide field of application of pH measurement. They can measure pH values between 1,0 pH to 14,0 pH with 1 pH intervals.

They provide easy pH measurement of solutions by using single color change.

After the measurement, the pH value can be found by matching the color on the paper with the reference color chart printed at the back side of the box.

Supplied in a box roll of 6 mm width and 5 meters length.

catalogue	pack
number	quantity
101.02.002	1 box

### pH INDICATOR STRIPS

They provide precise pH measurement of solutions by using single color change.

pH measurement pads with different colors are chemically bounded to a cellulose fiber stick.

> This effectively protects the sample against contamination and enables measurements even in weakly buffered of strongly alkaline solutions.

Fingers are protected from the test > solution since the test pads are located at the extreme end of the strips.

Since the pads do not bleed, pad colors do not interfere and mix with each other after the test and ensures reliable pH mesurement.

> After the measurement, the pH value can be found by matching the colors on the pads with the reference color chart printed at the back side of the box.

100 pieces strip is packed in a clear polystrene box for hygienic storage and for easy dispensing.

M. Nagel brand pH graduation Isolab strip strip pack box branc measuring range width lenath auantitv auantit 101.02.001 101.02.003 0,0 - 14,0 pH 1,0 pH 6 mm 80 mm 100 strips 1000 strips

### **TEST STRIPS - "PEHANON"**

Test strip for pH measurement which unifies the pH-indicator with the reference pH color chart on the same strip.

> pH values can be determined without a separate color chart. They provide precise pH measurement of solutions by using single color change.

> The user can be sure to get accurate pH values at all times.

Fast measurement results are guaranteed since they do not require an addition step of matching the pad color with a reference color scale.

The handle will remain dry and clean by the invisible hydrophobic barrier.

200 pieces strip is packed in a clear polystrene box for hygenic storage and for easy dispensing.

lsolab	M. Nagel	pH	pH	strip	strip	pack	box
brand	brand	measuring range	graduation	width	length	quantity	quantity
101.14.003	101.04.003	3,8 - 5,5 pH	0,2/0,3 pH	6 mm	80 mm	200 strips	





### QUANTOFIX TEST STRIPS - "peroxide"

> A very special "ready-to-use" test strip with semi-quantitative nature for various measurements.


Can be considered as ready to use kits that give precise results
 10 - 120 seconds after use. Precise graduations guarantees reliable test results.

> The color chart is adjusted by certified standard solutions which are directly traceble to NIST standards.

> For reliable test results and longevity of the strip closing the cap after removing the strip is recommended.

> The desiccant in the stopper also effectively protects the strip against moisture.

100 pieces strip are packed in a box for hygienic storage and for easy dispensing.

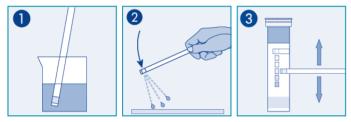

Dip the test strip in Shake off excess liquid Read the result by sample as far as the and place the strip on a comparing the test field arrow for one second. horizontal surface. with the color scale.



Isolab	M. Nagel	product	product		strip	strip	pack	box
brand	brand	name	type	graduation	wiɗth	length	quantity	quantity
101.13.003	101.03.003	QUANTOFIX	PEROXIDE 100	0 - 1 - 3 - 10 - 30 - 100 mg/L H2O2	6 mm	95 mm	100 strips	1000 strips

#### **TEST STRIPS - "for water hardness"**

In dialysis hard water can damage the delicate osmosis units.

 For this reason accurate and quick testing of water hardness is very important


"Diaquant" test strips are specially designed for reliable and accurate low-range water hardness tests of rinse and feed water specially at dialysis enviroment.

> All water hardness tests are done simple and fast without any mixing.

> The easy dip & read procedure provides a reliable result in 10 seconds.

After the test color changes from white to pink.

Packed in a box of 50 strips of 6 mm width and 95 mm length.



EE 932 009 5-20 ppm CaCOs Minimum Heumann Nearder Ste 6-4 - S265 Davis Germany Tel: +48 0421 3660

lsolab	M. Nagel	graduation	pack
brand	brand		quantity
101.13.005	101.03.005	0 - 5 - 10 - 20 ppm CaCO3	50 pieces

### **AQUADUR TEST STRIPS**

> A special "ready-to-use" test strip for determination of water hardness.

> Clear color changes from green to red guarantees reliable test results.

> Can precisely determine water hardness in a liquid very precisely from very soft water to very hard water.

Since the color change is very clear and sharp with green / red indication they do not require any reference color scale for matching.

➤ The hardness of the water depends on its content of calcium and magnesium salts and expressed in terms of ppm (mg/l) CaCO3.


> Packed in a box of 100 strips of 6 mm width and 95 mm length.



lsolab	M. Nagel	graduation	pack
brand	brand		quantity
101.13.004	101.03.004	<3->5->10->15->20->25°d	100 strips







### BALANCE "0,0001 g precision"

▶ Reliable weighing with 0,0001 g precision with single cell weighing system.

Microprocessor controlled weighing technology guarantees fast and precise results at any time.

> Equipped with internal fully automatic calibration for quick setting of the balance.

► Featured with easy-to-read, large, backlite LCD display with advanced eye protection.

State-of-art touch button screen with optimised keypad responce immediately.

 Robust housing protects internal components from environmental effects.

 Equipped with internal re-chargeable battery. Supplied with a dust cover.

catalogue no	602.31.001
weighing range (g)	220
readability (g)	0,0001
reproducibility (mg)	± 0,1
linearitiy (mg)	±0,2
pan diameter (mm)	90
weighing units	mg, g, kg, lb, oz, ozt, gn, ct
calibration	internal, fully automatic
display	LCD
cabin type	full
dimensions (mm)	342 x 212 x 341

### BALANCE "0,001 g precision"

► Reliable weighing with 0,001 g precision with single cell weighing system.

Microprocessor controlled weighing technology guarantees fast and precise results at any time.

> Equipped with external weight calibration system for quick setting.

➤ Featured with easy-to-read, large, backlite LCD display with advanced eye protection.

State-of-art touch button screen with optimised keypad responce immediately.

 Robust housing protects internal components from environmental effects.

 Equipped with internal re-chargeable battery. Supplied with a dust cover.

catalogue no	602.31.002
weighing range (g)	320
readability (g)	0,001
reproducibility (mg)	±2
linearitiy (mg)	±3
pan diameter (mm)	85
weighing units	g, kg, lb, oz, ozt, gn, ct
calibration	external
display	LCD
cabin type	with windshield
dimensions (mm)	280x210x275

### BALANCE "0,01 g precision"

Reliable weighing with 0,01 g precision with single cell weighing system.

 Microprocessor controlled weighing technology guarantees precise results.

 Equipped with external weight calibration system for quick setting.

> Featured with easy-to-read, large, backlite LCD display with advanced eye protection.

State-of-art touch button screen with optimised keypad responce immediately.

 Robust housing protects internal components from environmental effects.

 Equipped with internal rechargeable battery. Supplied with a dust cover.

catalogue no	602.31.003
weighing range (g)	1200
readability (g)	0,01
reproducibility (mg)	± 20
linearitiy (mg)	± 20
pan diameter (mm)	130
weighing units	g, kg, lb, oz, ozt, gn, ct
calibration	external
display	LCD
cabin type	with windshield
dimensions (mm)	280x210x180

150



### BALANCE "0,01 g precision"

► Reliable weighing with 0,01 g precision with single cell weighing system.

 Microprocessor controlled weighing technology guarantees precise results.

> Equipped with external weight calibration system for quick setting.

> Featured with easy-to-read, large, backlite LCD display with advanced eye protection.

State-of-art touch button screen with optimised keypad responce immediately.

> Robust housing protects internal components from environmental effects.

 Equipped with internal rechargeable battery. Supplied with a dust cover.



catalogue no	602.31.006
weighing range (g)	4200
readability (g)	0,01
reproducibility (mg)	± 20
linearitiy (mg)	±40
pan size (mm)	185 x 160
weighing units	g, kg, lb, oz, ozt, gn, ct
calibration	external
display	LCD
cabin type	without windshield
dimensions (mm)	280x210x100 mm



### BALANCE "0,01 g precision"

► Reliable weighing with 0,1 g precision with single cell weighing system.

 Microprocessor controlled weighing technology guarantees precise results.

> Equipped with external weight calibration system for quick setting.


► Featured with easy-to-read, large, backlite LCD display with advanced eye protection.

- State-of-art touch button screen with optimised keypad responce immediately.
- ► Robust housing protects internal components from environmental effects.

> Equipped with internal rechargeable battery. Supplied with a dust cover.



catalogue no	602.31.007	
weighing range (g)	6200	
readability (g)	0,1	
reproducibility (mg)	± 100	
linearitiy (mg)	± 200	
pan size (mm)	185 x 160	
weighing units	g, kg, lb, oz, ozt, gn, ct	
calibration	external	
display	LCD	
cabin type	without windshield	
dimensions (mm)	280x210x100 mm	



### BALANCE "0,01 g precision"

 Provides comfortable and reliable weighing with 0,01 g precision.

Fits even into a pocket. Occupies minimal space on the laboratory bench, yet maintains optimal performance. Ideal assistant where mobility and precision are required.

 Microprocessor controlled weighing technology guarantees precise results.


 Featured with easy-to-read, large, backlite LCD display with advanced eye protection.

► Robust housing protects internal components from environmental effects.

 Battery operated. With auto power off after 30 seconds for energy saving.



catalogue no	602.32.001
weighing range (g)	500
readability (g)	0,01
reproducibility (mg)	± 50
linearitiy (mg)	± 50
pan size (mm)	100 x 100
weighing units	g, oz, gn,
calibration	
display	LCD
cabin type	without windshield
dimensions (mm)	125x105x16 mm



#### WEIGHING DISHES - "P.S"

Manufactured from polystyrene for many applications such as weighing, dispensing and storing.

> Anti-static property of the raw material eliminates the static built-up. Specially recommended for weighing fine powders.

They can also be used as freeze and mixing trays for small batches and also during microwave moisture analysis.

► Guarantees chemical and temperature resistance between -10°C to +70°C.

Flat bottom ensures perfect stability on counters while smooth and nonporous inner surface provides accurate pour outs with minimal sample loss.


Non-sterile dishes are packed as 100 pieces. Sterile dishes are packed as 10 pieces.

dish color	diamond dishes non-sterile	diamond dishes gamma sterile	dish volume	square dishes non-sterile	square dishes gamma sterile	dish volume
white	037.05.005	037.15.005	5 ml	037.09.007	037.19.007	7 ml
white	037.05.030	037.15.030	30 ml	037.09.100	037.19.100	100 ml
white	037.05.100	037.15.100	100 ml	037.09.250	037.19.250	250 ml
black	037.06.005	037.16.005	5 ml	037.11.007	037.21.007	7 ml
black	037.06.030	037.16.030	30 ml	037.11.100	037.21.100	100 ml
black	037.06.100	037.16.100	100 ml	037.11.250	037.21.250	250 ml





With a slight pressure to the sides weighing dishes can easily be coverted into a pouring funnel for easy and nonspill transfer of samples.



#### WEIGHING DISHES "aluminum"

Manufactured from high grade, oil free, durable and light gauge aluminium.

> Unique design guarantees excellent use with moisture determination balances.

 Can also be used as a mixing or weighing pan.

► Wall with 6 mm height guarantees spillfree application.

Easily stackable due to the tapered body form for reducing storage space.

catalogue	Ø x H	pack
number	(mm)	quantity
037.25.100	100x6	50 pieces



#### WEIGHING DISHES "aluminum"

Manufactured from high grade, oil free, durable and light gauge aluminium. Featured with compressed walls for extra stability.

> Designed to be used as weighing dishes, evaporating dishes or drying dishes.

> Featured with a handle which enables easy holding of the dish. Can also be used as a marking surface.

Easily stackable due to the tapered body form for reducing storage space.

catalogue number	Ø x H (mm)	pack quantity
037.24.045	49x12	100 pieces
037.24.055	60x15	100 pieces
037.24.065	66x16	100 pieces



### WEIGHING DISHES "aluminum"

> Manufactured from high grade, oil free, durable and light gauge aluminium. Featured with compressed walls for extra stability.

> Unique design offers variety of applications. They can be used as weighing dishes, as mixing dishes also even as dishes for storing samples.

Easily stackable due to the tapered body form for reducing storage space.

catalogue number	Ø x H (mm)	pack quantity
037.23.070	70x22	100 pieces
037.23.085	88x38	100 pieces
037.23.110	110x34	100 pieces



### WEIGHING SCOOPS - "glass"

Made from glass with flat base ensuring stability on the ballance pans.

Hallow stem enables very easy powder transfer.

catalogue number	max. volume	pack quantity
037.07.001	3 ml	1 piece
037.07.002	6 ml	1 piece
037.07.003	10 ml	1 piece



### WEIGHING SCOOPS - "stainless steel"

Manufactured from stainless steel.

 Highly polished smooth interior provides accurate pour outs without sample loss.

length	pack quantity
95 mm	1 piece
117 mm	1 piece
125 mm	1 piece
	95 mm 117 mm



### WATCH GLASSES - "glass"

Manufactured from soda-lime glass according to DIN 12341 standard. Ideal tools also for evaporation applications and for covering the hot beakers.

 Fire polished edges prevent chipping and avoid breakage.

catalogue number	Ø (mm)	pack quantity
037.01.050	50	10 pieces
037.01.060	60	10 pieces
037.01.070	70	10 pieces
037.01.080	80	10 pieces
037.01.100	100	10 pieces
037.01.125	125	10 pieces
037.01.150	150	10 pieces
037.01.200	200	10 pieces




### WEIGHING BOTTLES - "glass"

> Manufactured from heat resistant, durable borosilicate glass complete with a lid.

> The interchangeable lids perfectly fit to the NS necks. Once closed they provide hermetical closure.

catalogue number	Ø x H (mm)	pack quantity
037.02.254	25 x 40	1 piece
037.02.353	35 x 30	1 piece
037.02.402	40 x 25	1 piece
037.02.305	30 x 50	1 piece
037.02.503	50 x 30	1 piece
037.02.357	35 x 70	1 piece
037.02.603	60 x 30	1 piece
037.02.408	40 x 80	1 piece
037.02.803	80 x 30	1 piece
037.02.508	50 x 80	1 piece



### **WEIGHING PAPER**

Manufactured from impervious and transparent paper specially suitable for weighing.

 Leaves no residue and impurity during and after weighing application.

 Cut as 100 x 100 mm dimensions and packed as a booklet of 250 papers.

catalogue	pack
number	quantity
037.33.001	1 booklet



#### **WEIGHING BRUSH**

Ideal tool for cleaning weighing boats, balance pans, weighing dishes and any similar object.

 Manufactured from extremely soft synthetic hair.  Pointed tip provides excellent effective cleaning.

catalogue	pack
number	quantity
037.32.001	1 piece





DENSITY BOTTLES - "non - calibrated & calibrated"

All density bottles are manufactured according to ISO 3507 standard. For easy differentiation both the body and the stopper carries the same identification code number.

> They are supplied with a stopper with excellently polished upper and lower ends. Nominal volume and inscriptions are printed with blue enamel.

### > Non-calibrated density bottles are supplied without calibration.

 Calibrated density bottles are calibrated together with the stopper with a precision of 0,001 ml. Net volume is engraved on the body.



► Calibrated density bottles with thermometer are calibrated together with the stopper with a precision of 0,001 ml. Net volume is engraved on the body. Supplied with a thermometer of scale range +10°C to +40°C, with scale 0,5°C.



Net volume with 0,001 ml presicion is engraved on the body of calibrated density bottles.

volume	non-calibrated density bottles	calibrated density bottles	calibrated density bottles with thermometer	pack quantity
5 ml	023.01.005	023.02.005	023.03.005	1 piece
10 ml	023.01.010	023.02.010	023.03.010	1 piece
25 ml	023.01.025	023.02.025	023.03.025	1 piece
50 ml	023.01.050	023.02.050	023.03.050	1 piece
100 ml	023.01.100	023.02.100	023.03.100	1 piece

#### **IMHOFF CONES**

Manufactured from heat resistant, durable borosilicate glass according for sedimentation tests according to DIN 12672 standard.

➤ Featured with volume graduation of 1000 ml. Volume graduations and inscriptions are printed with white enamel.

subdivision
0,1 ml
0,5 ml
1,0 ml
2,0 ml
50,0 ml

catalogue number	cone type	pack quantity
043.20.001	without stopcock	1 piece
043.20.002	with stopcock	1 piece



### **IMHOFF CONE STANDS**

 Manufactured to hold two imhoff sedimentation cones of any type.

> Compact design allows easy carry of imhoff cones even when the cones are filled.

catalogue number	rack type	pack quantity
043.22.002	PMMA	1 piece







catalogue no	613.06.001
dimensions	215x360x112 mm
weight	5,3 kg
plate size	184 x 184 mm
top plate	glass ceramic
motor type	DC motor
power	1050 W
voltage	100 - 240 V
frequency	50 / 60 Hz
capacity	20 L
range	100 - 1500 rpm
display	LCD
output	1000 W
range	room temp - 550°C
accuracy	±1 % > 100°C
safety temp.	580°C
warning	50°C
accesories	sensor PT 1000

### MAGNETIC STIRRER - "with hot plate"

➤ Featured with an explosion proof brushless DC motor with low noise level offers a stirring volume up to 20 lt.

 Ceramic top plate guarantees perfect chemical resistance against acids.

Integrated the heater provides excellent heat transfer rate and quick heat up.

> Aluminium alloy housing protects all components from aggressive effects and guarantees safety with a long life time.

 Electronic speed control from 100 to 1500 rpm provides a precise stirring.

► LCD panel for display for set & actual temperature and set & actual speed.

► Guarantees excellent heating control from ambient temperature to 550°C.

> Overheat protection circuit turns off the heater if the top plate temperature reaches 580°C for any reason. LCD display will show "HOT" if hotplate temperature is over 50°C.

Supplied complete with PT1000 temperature sensor, support rod and fixing clamp.



catalogue no	613.01.001
dimensions	268x160x86 mm
weight	1,8 kg
plate size	Ø135
top plate	stainless steel
motor type	DC motor
power	630 W
voltage	100 - 240 V
frequency	50 / 60 Hz
capacity	3 <i>L</i>
range	100 - 1500 rpm
display	LED
output	600 W
range	room temp - 280°C
accuracy	±0.1°C
safety temp.	50 - 320°C
warning	50°C

sensor PT 1000

accesories

MAGNETIC STIRRER - "with hot plate"

> Featured with an brushless DC motor with low noise level offers a stirring volume up to 3 lt.

> Ceramic top plate guarantees perfect chemical resistance against acids.

Integrated the heater provides excellent heat transfer rate and quick heat up.

> ABS housing protects all components from aggressive effects and guarantees safety with a long life time.

 Electronic speed control from 100 to 1500 rpm provides a precise stirring.

 LED panel for display for set & actual temperature and set & actual speed.

► Guarantees excellent heating control from ambient temperature to 280°C.

> Overheat protection circuit turns off the heater if the top plate temperature reaches 320°C for any reason.

Supplied complete with PT1000 temperature sensor.

> Please kindly order support rod separately Cat. No 613.01.102



### MAGNETIC STIRRER - "without hot plate"

catalogue no	613.03.001
dimensions	150x260x80 mm
weight	1,8 kg
plate size	Ø135
motor type	DC motor
power	15 W
voltage	220 V
frequency	50 / 60 Hz
capacity	3 <i>L</i>
range	100 - 1500 rpm
display	LED

Maintenance free DC motor with low noise level offers a stirring volume up to 3 It with a smooth start and quick stop.

► Electronic speed control from 100 to 1500 rpm provides a gentle revolution and precise stirring speed even at maximum speed range.

 Large LED panel offers simultaneous display for set & actual speed.

> ABS housing protects all mechanical and electronic components from aggressive effects and guarantees safety with a long life time.

> Also provides impact resistant, easily cleanable, scratch-proof surface.



#### MAGNETIC STIRRER - "without hot plate"

catalogue no	613.05.001
dimensions	150x145x50 mm
weight	0,3 kg
plate size	Ø120
motor type	DC motor
power	7,2 W
voltage	220 V
frequency	50 / 60 Hz
capacity	1,5 L
range	300 - 2000 rpm
display	N/A

> This light weight, compact designed magnetic stirrer is specially recommended for titration applications.

► Electronic speed control from 300 to 2.000 rpm provides precise stirring speed even at maximum speed range.

> DC motor offers a stirring volume up to 1,5 It with a smooth start and quick stop.

> PET housing protects components from aggressive effects.

> Anti-slip silicone feet pads minimize vibration and guarantee excellent stability.

Featured with an adjustable clamp holder suitable to hold electrodes and other probes.



#### MAGNETIC STIRRER - "without hot plate"

catalogue no	613.07.001	
dimensions	115x175x12 mm	
weight	0,35 kg	
plate size	Ø100	
motor type	Magnetic motor	
power	5 W	
voltage	220 V	
frequency	50 / 60 Hz	
capacity	0,8 L	
range	15 - 1500 rpm	
display	N/A	

> This ultra-flat, compact designed magnetic stirrer with only 350 gr weight can be carried even in a pocket.

> Specially recommended for titration applications. Offers a stirring volume up to 0,8 It with a smooth start and quick stop.

> Electronic speed control from 15 to 1500 rpm provides precise stirring speed even at maximum speed range.

> Featured with automatic reverse rotation function for more efficient mixing.

 ABS housing protects all components from aggressive effects.

> Also provides impact resistant, easily cleanable, scratch-proof surface.



### MAGNETIC STIRRING BARS "cylindirical"

 Manufactured from ALNICO (an alloy of aluminium, nickel, iron and cobalt) magnets encapsulated with PTFE coating.

 Cylindrical magnetic stirring bars offer for a wide variety of applications providing excellent mixing effect.

 Polished finish provides excellent centering and smooth uninterupted stirring.

> Their perfect contacts with the base of the flask reduce the risk of ricochet during stirring.

catalogue number	length	diameter	pack quantity
057.01.010	10 mm	6 mm	10 pieces
057.01.015	15 mm	6 mm	10 pieces
057.01.020	20 mm	6 mm	10 pieces
057.01.025	25 mm	6 mm	10 pieces
057.01.030	30 mm	6 mm	10 pieces
057.01.035	35 mm	6 mm	10 pieces
057.01.040	40 mm	8 mm	10 pieces
057.01.045	45 mm	8 mm	10 pieces
057.01.050	50 mm	8 mm	6 pieces
057.01.060	60 mm	9 mm	6 pieces
057.01.070	70 mm	9 mm	6 pieces
057.01.080	80 mm	9 mm	6 pieces



### MAGNETIC STIRRING BARS "oval - elliptical"

 Manufactured from ALNICO (an alloy of aluminium, nickel, iron and cobalt) magnets encapsulated with PTFE coating.

These elliptic magnetic stirrer bars provide excellent mixing effect specially when used with round bottom flasks.

> Their egg shapes guarantee unrestricted spinning and effective mixing by perfect adaptation of the vessel contour.

catalogue number	length	diameter	pack quantity
057.05.020	20 mm	8 mm	1 piece
057.05.025	25 mm	10 mm	1 piece
057.05.030	30 mm	11 mm	1 piece
057.05.035	35 mm	12 mm	1 piece
057.05.040	40 mm	15 mm	1 piece



### MAGNETIC STIRRING BARS "cross form"

 Manufactured from ALNICO (an alloy of aluminium, nickel, iron and cobalt) magnets encapsulated with PTFE coating.

Cross formed magnetic stirring bar creates a deep vortex even at relatively slow speeds and provides an excellent mixing.

Their angled body forms reduce the friction effect during stirring and provide excellent centering and smooth uninterupted stirring.

Their perfect contacts with the base of the flask reduce the risk of ricochet during stirring.

catalogue number	dimensions	pack quantity
057.06.037	37 x 37 mm	1 piece




BOX - "with compartments" - "acrylic"

> Manufactured from acrylic featured with different size compartments. Offers practical positioning and easy reach of different size small objects such as magnetic stirrers.

> The long compartment is ideal to store longer objects including magnetic bar retrievers. Featured with a lid protecting the box interior from environmental conditions.

catalogue	box	box	box	compartmen	nt pack
number	width	length	height	quantity	quantity
057.02.101	330 mm	110 mm	35 mm	12	1 piece

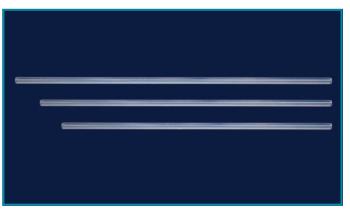

#### STIRRING ROD - "glass"

 Glass rods are manufactured from rods with different diameters and lengths.

Their flame polished ends prevents unexpected breakage during applications. They offer practical solutions for mixing and stirring solutions by hand.

glass stirring rod	length	diameter	pack quantity
057.03.200	200 mm	5 mm	10 pieces
057.03.250	250 mm	6 mm	10 pieces
057.03.300	300 mm	6 mm	10 pieces

## **MAGNETIC BAR RETRIEVERS** Constructed with a PTFE encapsulated powerful magnet at the end of a long stem. > Essential tool for picking up the magnetic stirring bars from flasks after use without loosing them. > They offer risk-free removal of magnetic stirring bars even from agressive liquids and reduce the risk of magnetic bar loss. Alternative 2 retrievers: With solid stem With flexible stem > Magnetic bar retriever with flexible stem guarantees easy reach to the edges of the cornered flasks such as erlenmeyers. catalogue number retriever model stem length pack quantity 057.02.001 270 mm solid stem 1 piece 057.02.002 flexible stem 300 mm 1 piece P

### STIRRING ROD - "polypropylene"


Manufactured from polypropylene with a flattened ends for effective mixing.

Offers practical solutions for mixing and stirring solutions both for narrow and wide neck flasks.

Featured with two flat ends with different widths on a single handle.

Flat ends have 35 degree sharp edges for easy removal of the residues on flat surfaces.

catalogue	total	narrow	large	pack
number	length	end width	end width	quantity
057.04.251	240 mm	12 mm	23 mm	10 pieces





Two ends with different widths for narrow and wide neck flasks.



### MECHANICAL STIRRER - "light duty"

catalogue no	615.01.001	
dimensions	83x220x186 mm	
weight	2,6 kg	
motor type	DC motor	
power	70 W	
voltage	100 - 240 V	
frequency	50 / 60 Hz	
capacity	20 L	
range	0 - 2200 rpm	
display	LED	
resolution	±1 rpm	
max. torque	40 Ncm	
max. viscosity	10000 mPas	
chuck dia.	0,5 - 10 mm	

> Highly reliable design for stirring low to medium viscous media with a vibration free and silent operation.

> Maintenance free, silent and explotion proof DC motor offers a stirring volume up to 20 It with a smooth start without sample overflow and a quick stop.

> Sturdy aluminium main body efficiently absorbs and emits the heat generated by the motor.

Electronic speed control from 0 to 2200 rpm provides a gentle revolution and precise stirring speed even at high temperatures.

► Large LED panel for simultaneous display for set & actual speed.


> Overload safety feature automatically stops the operation and protects all mechanical and electronic components.

> Stirring shafts can be easily inserted to their position by "push through" system.


Stirring shaft, stand and fixing clamp are not supplied as a standard accesory. These should be ordered separately.

accesories for mechanical stirrer - "stirring shafts"





catalogue number	shaft type	shaft dia. & length	shaft material	recommended for
615.01.101	cross	9,0 x 400 mm	st. steel	medium & high speed
615.01.103	cross	8,5 x 350 mm	PTFE	medium & high speed

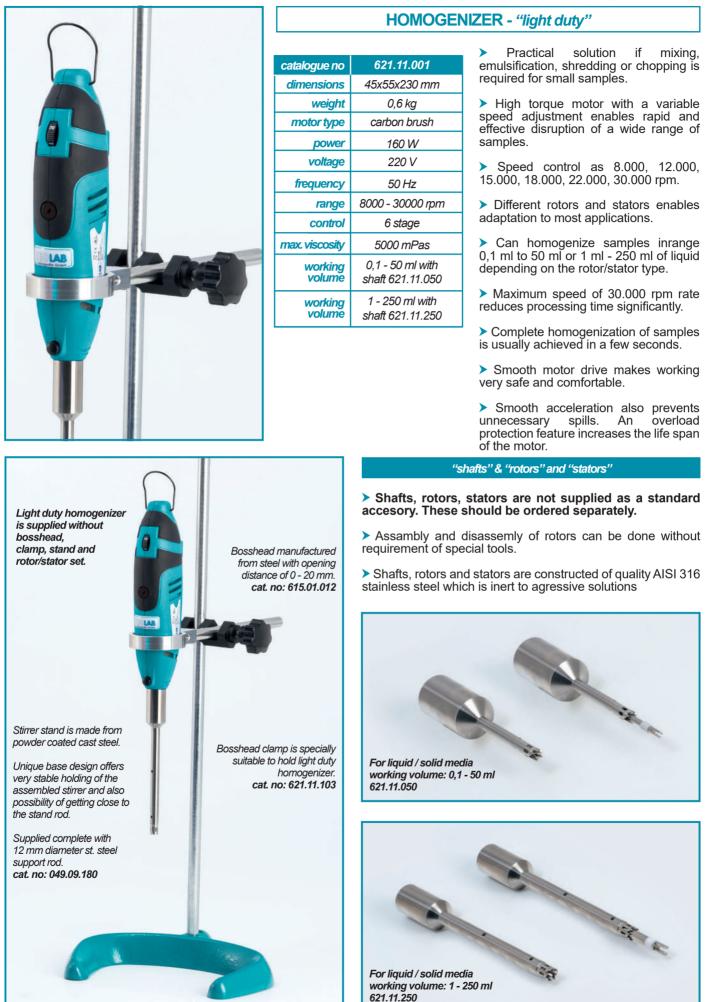

### WATER BATHS

> Water tank is manufactured from cavitation-proof, seamless and corrosion resistant stainless steel.

> Alarm and timer functions can be automatically controlled by membrane keypad with digital LED panel.

Integrated heater design provides homogenous heat distribution rate and enables rapid heating up.

Integrated PID temperature technology enables excellent heating control from ambient +5°C to 99°C with accuracy of +/- 0,1°C.

> Integrated overheat protection with alarm circuit automatically turns off heating in case of overheating.

> Automatic timer with audial and visual alarm functions enables selective operation as "continuous" mode or 99 minutes and 99 hours.

> Perforated bottom tray protects heating element and temperature sensor.

> Delivered complete with flat type stainless steel lid.



Seamless, robust cavitation-proof, stainless steel water tank. Perforated bottom tray protects heating element and temperature sensor. Baths are supplied with a stainless steel flat lid.



Membrane keypad with digital LED panel with timer, alarm and auto-tuning functions. Timer with delayed on/off function can be set selectively either to 99 min. 59 sec. or 99 hour 59 min.



catalogue number	602.01.001	602.02.001
external dimensions (mm)	327 x 265 x 280	537 x 327 x 280
tank dimensions (mm)	300 x 240 x 150	500 x 295 x 150
tank volume (L)	11	22
heating output (W)	700	1400
heating range (°C)	ambient + 5 to 99	ambient + 5 to 99
heating control	PID technology	PID technology
heating accuracy (°C)	±0,1	±0,1
tank temp. uniformity	±1	±1
voltage (V)	220	220
frequency (Hz)	50/60	50/60
time & temp. display	LED	LED
time control	99 min 99 hour	99 min 99 hour
over heat protection	yes	yes
standard accesories	st. steel lid	st. steel lid

### WATER CONDITIONER

 Higly effective special softener for water baths.

> Extremely gentle on ware with almost neutral pH value.

> Fully water soluble, lowfoaming, low phosphate content, non-combustible, no gas formation, non-aggressive, biodegradable.

Recommended 2 ml added to each 1 lt exchanged water.

catalogue	pack
number	quantity
602.01.101	500 ml bottle





HEATING MANTLES - "without stirrer"

> Designed heating and boiling liquids in various size of round bottom flasks from 100 ml to 10.000 ml.

Time proportional heater control with excellent repeatability enables a temperature operating range to 450°C.

Heating element is made of highly flexible heat-resistant glass yarn which performs a maximum temperature of 900°C.

> Flexible heating element absorbs chocks, minimizing the risk of flask breakage and guarantees uniform heat distribution.

 Outer casting is manufactured from easy to clean powder coated steel.

> Glass fibre outer insulation with excellent ventilation slots keeps the outer casing cool at all times.

Featured with non-skid rubber feet enabling perfect stability during operation.

Control panel has separate indicator lamps for power and heat functions.



Heating element is made of highly flexible heat-resistant glass yarn which performs at maximum temperature of 900°C.

catalogue no	608.11.100	608.11.250	608.11.500	608.11.901	608.11.902
Voltage	220 V				
Frequency		50 Hz			
Power	100W	150 W	250 W	350 W	450 W
Max. Heating	450°C				
Capacity	100 ml	250 ml	500 ml	1000 ml	2000 ml



#### HEATING MANTLES - "with stirrer"

Designed to control both heating power and stirring speed independently.

Time proportional heater control with excellent repeatability enables a temperature control to 450°C.

Heating element is made of highly flexible heat-resistant glass yarn which performs a maximum temperature of 900°C.

> Flexible heating element absorbs chocks, minimizing the risk of flask breakage and guarantees uniform heat distribution.

> Provides a stirring speed up to 1.400 rpm with an integrated magnetic stirrer.

For effective stirring, place the correct model and size of magnetic stirrer into the flask and increase the stirring speed slowly from minimum level.

> Outer casting is manufactured from easy to clean powder coated steel.

Glass fibre outer insulation with excellent ventilation slots keeps the outer casing cool at all times.

> Featured with non-skid rubber feet enabling perfect stability during operation.

Control panel has separate indicator lamps for heating and stirring functions.

catalogue no	608.12.100	608.12.250	608.12.500	608.12.901				
voltage	220 V							
frequency		50 Hz						
power	100 W	150 W	250 W	350 W				
max. heating		450°C						
capacity	100 ml	250 ml	500 ml	1000 ml				
stirring	0 - 1400 rpm							



catalogue no	622.01.001		
dimensions	127x130x160 mm		
weight	3 kg		
power	60 W		
voltage	220 V		
frequency	50 / 60 Hz		
motion	orbital		
motion dia.	4 mm		
run time	continuous / touch		
range	0 - 2500 rpm		
display	scale		

### VORTEX MIXER - "advanced"

Offers touch and continuous orbital mixing. Provides mixing with adjustable speed control from 0 to 3000 rpm.

 Guarantees perfect mixing of a 50 ml tube in 3 seconds.

 Unique counter-balance system creates maximum vortex power.

 Aluminium cast and silicone feet pads minimize the vibration avoiding "walking".

 Reliable and extremely quiet motor guarantees an even distributed mixing.

> Can be used both in cold rooms, incubators and anaerobic and aerobic chambers due to the small foot print and extremely compact design.



### VORTEX MIXER - "LED display"

catalogue no	622.03.001		
dimensions	110x145x160 mm		
weight	3 kg		
power	20 W		
voltage	220 V		
frequency	50 / 60 Hz		
motion	orbital		
motion dia.	5 mm		
run time	continuous / touch		
range	0 - 3000 rpm		
display	LED		

> Offers touch and continuous orbital mixing.

Provides efficient mixing with infinitely adjustable electronic speed control from 0 to 3000 rpm.

➤ Operation time can be set and controlled electronically between 1 second to 100 minutes. User friendly large LED displays enable easy setting and reading of speed and time.

Guarantees perfect mixing of a 50 ml tube in 5 seconds with 6 mm diameter orbital movement.

> Other thecnical specifications are same as 622.01.001.



#### VORTEX MIXER - "basic"

catalogue no	622.02.001
dimensions	100 mm dia. x 78 mm
weight	0,55 kg
power	12 W
voltage	100 - 240 V
frequency	50 / 60 Hz
motion	orbital
motion dia.	5.5 mm
run time	continuous / touch
range	3000 rpm
display	N/A

Offers perfect orbital vortex mixing with a single touch. Provides efficient mixing with fixed speed of 3000 rpm.


Guarantees perfect mixing of a 50 ml tube in 3 seconds with 5.5 mm diameter orbital movement.

> Unique counter-balance system creates maximum vortexing while minimizing the noise and vibration.

 Reliable and extremely quiet motor guarantees an even distributed mixing.

Can be used in limited areas due to the small foot print and extremely compact design.



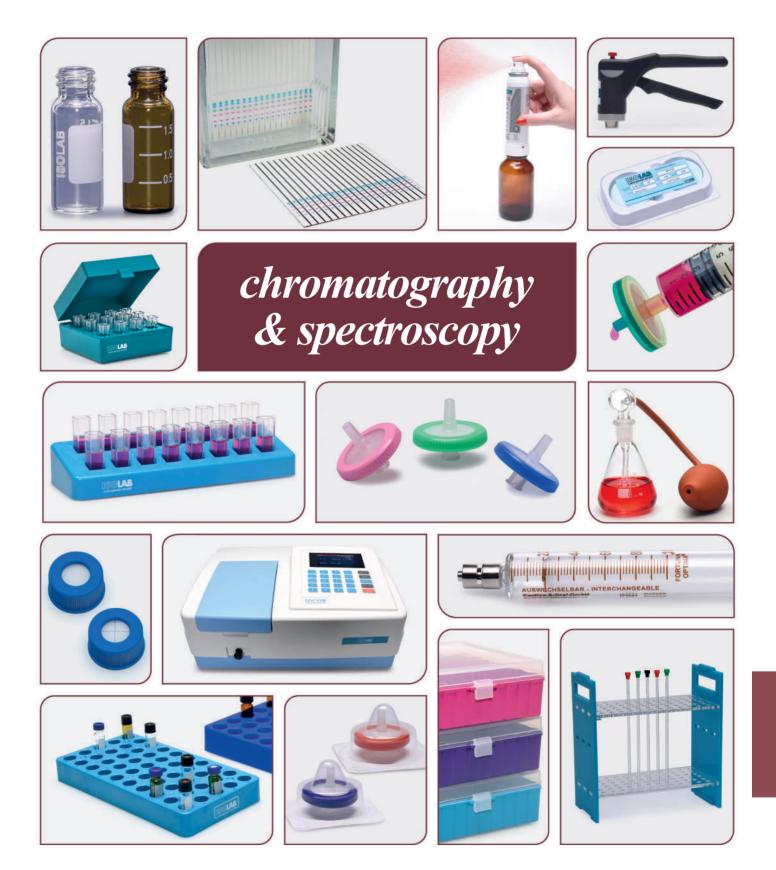



### SYRINGE FILTERS - "non-sterile" - "sterile"

> Specially designed for HPLC sample preperations with the best quality tear proven membranes. Fully autoclavable.

Since the housing is ultrasonically sealed they offer excellent pressure stability.

> Sample distribution rings of the body direct samples for uniform filtration with a guarantee of high flow rate and filtration speed on both directions restricting the liquid overload.

> Unique female luer-lock secures connections with syringes. Body design enables to be used with all robotic machines.

Membrane type and porosity printed on each filter. Different colour coded sealing rings in MN enable easy differentiation of the membrane type.

Available 2 filters: Syringe filters with 0,45 µm pore size
 Syringe filters with 0,22 µm pore size

ISOLAB non-sterile 0,45 um filters	MN non-sterile 0,45 um filters	non-sterile pack quantity	MN sterile 0,45 um filters	ISOLAB sterile 0,45 um filters	sterile pack quantity	filter membrane material	code name	pore size µm	diameter
094.01.001	094.02.001	100 pieces		094.05.001	50 pieces	regenerated cellulose	RC	0.45	25 mm
094.01.002	094.02.002	100 pieces		094.05.002	50 pieces	polytetrafluoroethylene	PTFE-1	0.45	25 mm
094.01.003	094.02.003	100 pieces		094.05.003	50 pieces	polyvinylidenedifluoride	PVDF	0.45	25 mm
	094.02.004	100 pieces				polyester	PET	0.45	25 mm
094.01.005	094.02.005	100 pieces		094.05.005	50 pieces	cellulosemixedesters	MV	0.45	25 mm
094.01.006	094.02.006	100 pieces	094.06.006	094.05.006	50 pieces	cellulose acetate	CA	0.45	25 mm
094.01.007	094.02.007	100 pieces		094.05.007	50 pieces	nylon / polyamide	PA	0.45	25 mm
094.01.008	094.02.008	100 pieces		094.05.008	50 pieces	polyethersulfone	PES	0.45	25 mm
094.01.009		100 pieces		094.05.009	50 pieces	polytetrafluoroethylene	PTFE-2	0.45	25 mm

ISOLAB non-sterile 0,22 um filters	MN non-sterile 0,22 um filters	non-sterile pack quantity	MN sterile 0,22 um filters	ISOLAB sterile 0,22 um filters	sterile pack quantity	filter membrane material	code name	pore size µm	diameter
094.03.001	094.04.001	100 pieces		094.07.001	50 pieces	regenerated cellulose	RC	0.22	25 mm
094.03.002	094.04.002	100 pieces		094.07.002	50 pieces	polytetrafluoroethylene	PTFE-1	0.22	25 mm
094.03.003	094.04.003	100 pieces		094.07.003	50 pieces	polyvinylidenedifluoride	PVDF	0.22	25 mm
	094.04.004	100 pieces				polyester	PET	0.22	25 mm
094.03.005	094.04.005	100 pieces		094.07.005	50 pieces	cellulosemixedesters	MV	0.22	25 mm
094.03.006	094.04.006	100 pieces	094.08.006	094.07.006	50 pieces	cellulose acetate	CA	0.22	25 mm
094.03.007	094.04.007	100 pieces		094.07.007	50 pieces	nylon / polyamide	PA	0.22	25 mm
094.03.008	094.04.008	100 pieces		094.07.008	50 pieces	polyethersulfone	PES	0.22	25 mm
094.03.009		100 pieces		094.07.009	50 pieces	polytetrafluoroethylene	PTFE-2	0.22	25 mm

*MV* = cellulose mixed esters, CA = cellulose acetate, *RC* = regenerated cellulose, *PA* = polyamide, *PTFE-1* = polytetrafluoroethylene hydrophobic, *PTFE-2* = polytetrafluoroethylene hydrophilic, *PVDF* = polyvinylidene difluoride, *PES* = polyethersulfone, *PET* = polyester



volume	overall length	pack quantity
2 ml	87 mm	300 pieces
5 ml	87 mm	225 pieces
10 ml	100 mm	150 pieces
20 ml	115 mm	100 pieces
	2 ml 5 ml 10 ml	2 ml 87 mm 5 ml 87 mm 10 ml 100 mm



### SYRINGES - "polypropylene" - "sterile"

> 2 pieces syringes are suitable for HPLC applications. Sterile, pyrogen-free and for single use, latex and silicone oil free.

Consists of very clear, highly transparent and absolutely leak-tight polypropylene barrel and polyethylene piston.

Ergonomically designed for single-handed operation.
 Featured with accurate graduated scale marking.

Smooth piston movement offers reduced sliding force.

Defined position at "0" volume level to feel when piston is completely inserted.

Defined safety stop to avoid accidental pull-out of plunger and loss of sample.

> Supplied with syringe needles. Packed in individual blister packing.

### **MEMBRANE FILTERS**



> Membrane filtration offer a very convenient, fast and economical separation method.

#### They offer below mentioned advantages;

- Excellent level of particle retention
- Large load carry capacity
- ✓ High permeability to air

**CM: cellulose mixed ester membrane** Particularly suitable for aqueous solutions. They are hydrophilic. Thermally stable to 121°C. Ideal for gravimetric analysis and are often used for contamination tests.

#### **PTFE: polytetrafluoroethylene membranes** Particularly suitable with aggressive media, as well as to concentrated acids

and bases. They are hydrophobic, they can be used up to 145°C.

- ✓ Non-hygroscopic and biologically inert
- Chemical resistance to most solvents and reagents.
- ✓ Very high temperature resistance

#### NC: nitrocellulose membranes

They are easily wettable and suited for filtration of aqueous solutions. In dry atmosphere these membranes are thermally stable at 125°C and can be autoclaved at 121°C.

#### **PE: polyester membranes**

They are hydrophilic. Particularly suitable for fine titration, dust analysis, aerosol analysis and ultra-purification of solvents.

#### GF/C: glass fibre filter

Suitable for determination of liquid scintillation counting and total suspended solids collection in potable water and in industrial waste. Grade 50C glass fibre filters are hydrophilic and medium / fast, very high loading. They resist temperatures up to 500°C.

**RC: regenerated cellulose membranes** These membranes are resistant to most organic solvents. They are mostly used for filtration of solvent mixtures and ultrapurification and degassing of HPLC eluents.

#### CA: cellulose acetate membranes

They have a low protein binding capacity and they are suited for aqueous and alcoholic media. They are hydrophobic and can be used for hot gases up to 180°C.

catalogue number	membrane material	code name	pore size	type	diameter	pack quantity
104.01.001	cellulose mixed ester	СМ	0,20 µm	1	47 mm	100 pieces
104.01.002	cellulose mixed ester	СМ	0,45 µm	1	47 mm	100 pieces
104.01.003	nitrocellulose	NC	0,20 µm	1	47 mm	100 pieces
104.01.004	nitrocellulose	NC	0,45 µm	1	47 mm	100 pieces
104.01.005	regenerated cellulose	RC	0,20 µm	1	47 mm	100 pieces
104.01.006	regenerated cellulose	RC	0,45 µm	1	47 mm	100 pieces
104.01.007	polytetrafluoroethylene	PTFE	0,20 µm	1	47 mm	100 pieces
104.01.008	polytetrafluoroethylene	PTFE	0,45 µm	1	47 mm	100 pieces
104.01.009	polyester	PE	0,20 µm	1	47 mm	100 pieces
104.01.010	polyester	PE	0,45 µm	1	47 mm	100 pieces
104.01.011	cellulose acetate	CA	0,20 µm	1	47 mm	100 pieces
104.01.012	cellulose acetate	CA	0,45 µm	1	47 mm	100 pieces
104.01.013	glass fibre	GF/C	1,20 µm	2	47 mm	100 pieces



**"A" type needles** are designed for optimum penetration with 17° bevel. Also minimizes the necessary piercing force and diameter of injection channel.

**"B" type needles** has a 90° bevel for precise pipetting. This design relases drops completely, for maximum repreducibility. Ideal for HPLC sample injection.

**"C" type needles** are designed for autosamplers. The tapered tip and the 90° square end eliminate burns. Ideal for PTFE laminated seals and regular septas.

SYRINGES - "for dosage of liquids" - "0 dead volume needle" - "serie T"



Plunger: stainless steel (plunger runs inside the needle) Barrel: borosilicate glass Precision: < +/- 1% of the volume Main use: sample dosage for gas chromatography & dosage of small volume samples & for thin layer chromatography

nger	syringe volume	catalogue number	needle type	catalogue number	needle type	pack quantity
	0,5 µl	094.31.005	Α	094.32.005	В	1 piece
olume	1,0 µl	094.31.010	А	094.32.010	В	1 piece
ge of	2,0 µl	094.31.020	А	094.32.020	В	1 piece
hin	5,0 µl	094.31.050	А	094.32.050	В	1 piece
	10 µl	094.31.100	А	094.32.100	В	1 piece
	25 µl	094.31.250	A	094.32.250	В	1 piece

### SYRINGES - "for dosage of liquids" – "fixed needle" – "serie FN"



Plunger: stainless steel Barrel: borosilicate glass	syringe volume	catalogue number	needle type	catalogue number	needle type	catalogue number	needle type	pack quantity
<b>Precision:</b> < +/- 1% of the volume	5 µl	094.11.005	Α	094.12.005	В	094.13.005	С	1 piece
Main use: sample dosage for gas	10 µl	094.11.010	Α	094.12.010	В	094.13.010	С	1 piece
chromatography & HPLC valves & autosamplers	25 µl	094.11.025	А	094.12.025	В	094.13.025	С	1 piece
autosampiers	50 µl	094.11.050	Α	094.12.050	В	094.13.050	С	1 piece
	100 µl	094.11.100	Α	094.12.100	В	094.13.100	С	1 piece
	250 µl	094.11.250	Α	094.12.250	В	094.13.250	С	1 piece
	500 µl	094.11.500	Α	094.12.500	В	094.13.500	С	1 piece

SYRINGES - "for dosage of liquids" – "removable needle" – "serie RN"



Plunger: stainless steel Barrel: borosilicate glass Precision: < +/- 1% of the volume Main use: sample dosage for gas chromatography & HPLC valves & autosamplers

	syringe volume	catalogue number	needle type	catalogue number	needle type	pack quantity
•	5 µl	094.21.005	Α	094.22.005	В	1 piece
	10 µl	094.21.010	А	094.22.010	В	1 piece
ĸ	25 µl	094.21.025	А	094.22.025	В	1 piece
	50 µl	094.21.050	А	094.22.050	В	1 piece
	100 µl	094.21.100	А	094.22.100	В	1 piece
	250 µl	094.21.250	А	094.22.250	В	1 piece
	500 µl	094.21.500	A	094.22.500	В	1 piece

SYRINGES - "for dosage of gas & liquids" – "fixed needle" – "serie H"



**Plunger:** stainless steel with PTFE seal

**Barrel:** borosilicate glass **Precision:** < +/- 1% of the volume Main use: sample dosage for gas chromatography & HPLC valves & autosamplers & dosage of aggresive fluids

	syringe volume	catalogue number	needle type	catalogue number	needle type	pack quantity
	5 µl	094.41.005	Α	094.42.005	В	1 piece
)	10 µl	094.41.010	А	094.42.010	В	1 piece
•	25 µl	094.41.025	А	094.42.025	В	1 piece
	50 µl	094.41.050	А	094.42.050	В	1 piece
	100 µl	094.41.100	А	094.42.100	В	1 piece
	250 µl	094.41.250	А	094.42.250	В	1 piece
	500 µl	094.41.500	А	094.42.500	В	1 piece
	1,0 ml	094.41.901	А	094.42.901	В	1 piece
	2,5 ml	094.41.902	А	094.42.902	В	1 piece
	5,0 ml	094.41.905	А	094.42.905	В	1 piece
	10,0 ml	094.41.910	А	094.42.910	В	1 piece

SYRINGES - "for dosage of gas & liquids" – "removable needle" – "serie H"



# **Plunger:** stainless steel with PTFE seal

Barrel: borosilicate glass Precision: < +/- 1% of the volume Main use: sample dosage for gas chromatography & HPLC valves & autosamplers & dosage of aggresive fluids

syringe volume	catalogue number	needle type	catalogue number	needle type	pack quantity
5 µl	094.51.005	A	094.52.005	В	1 piece
10 µl	094.51.010	А	094.52.010	В	1 piece
25 µl	094.51.025	Α	094.52.025	В	1 piece
50 µl	094.51.050	А	094.52.050	В	1 piece
100 µl	094.51.100	А	094.52.100	В	1 piece
250 µl	094.51.250	A	094.52.250	В	1 piece
500 µl	094.51.500	A	094.52.500	В	1 piece
1,0 ml	094.51.901	A	094.52.901	В	1 piece
2,5 ml	094.51.902	А	094.52.902	В	1 piece
5,0 ml	094.51.905	А	094.52.905	В	1 piece
10,0 ml	094.51.910	А	094.52.910	В	1 piece

### SYRINGES - "glass" - "with luer-lock"





> Manufactured from borosilicate glass. Featured with a > Smooth piston movement offers reduced sliding force. stainless steel luer-lock system.

> Luer-lock grabs the needle or syringe filter stem and guarantees leak-proof delivery of the liquid even under high pressure.

- > Luer-Barrel and the piston can be repeatedly autoclavable.
- > Ergonomically designed for single-handed operation.

catalogue number	volume	overall length	pack quantity
094.92.001	1 ml	85 mm	1 piece
094.92.005	5 ml	105 mm	1 piece
094.92.010	10 ml	130 mm	1 piece
094.92.020	20 ml	145 mm	1 piece
094.92.050	50 ml	180 mm	1 piece

### **CHROMATOGRAPHY VIALS & SEPTAS & CAPS**

In chromatography a wide variety of vials are used as sample containers. As they are mainly used by automatic instruments strict obedience of all dimensions is essential for trouble-free tests. Besides of these physical properties the vials have to fulfill requirements regarding inertness and cleanliness.



### chromatography vials –

✓ Vials are either manufactured from glass or plastic. Glass vials are manufactured from 1st hydrolic glass tubings with low expansion coefficient.

✓ Hydrolic glass quality offers perfect resistance to all chemicals and higher hydrolic resistance.

✓ Plastic vials are manufactured from polypropylene with a very good resistance to most of the chemicals and high hydrolic resistance.



### \_ septas & caps \_\_\_\_\_

Sealing units for vials are combination of caps and septas. Caps can be offered either with slit or without slit.

✓ For problem-free and correct results seals should also be inert and uncontaminated.

✓ Almost all septa are laminated on one side with PTFE, which has a high chemical resistance and forms an inert barrier between the sample in the vial and the cap of the septa.



### - vial packing —

✓ Some vials (specially small size ones such as N8, N9 and N11) are packed in a polystyrene boxes.

✓ This kind of packing provides guarantees protection against dust and other environmental effects.

✓ The glass clear polystyrene box makes the vials always clearly visible at all times.



### - cap packing –

✓ Caps are usually packed in tamper-proof evident ziplocked bags.

✓ These bags allow easy identification of the content due to the transparent P.E material.

✓ The zip-lock enables resealing of the bag after used.

### VIALS - "glass" - "screw cap" - "N8"



Manufactured from hydrolic No:1 glass. Supplied without caps & septas.

Offers perfect shape, very low dimensional tolerance and exact wall thickness for optimum performance.

Featured with volume graduations and marking area.

color

### CAPS & SEPTAS - "for N8 vials"





> Offer optimum system performance. Designed to work excellently with needles. All of them are specially sized for proper sealings.

> Packed in tamper-proof evident, transparent, zip-locked bags that allow easy identification.

catalogue number	product specifications	pack quantity
096.00.001	silicone / PTFE - without slit	100 pieces
096.00.002	silicone / PTFE - with slit	100 pieces

#### catalogue number vial dimensions pack quantity 095.00.001 11,6 x 32 mm 1,5 ml clear 100 pieces 095.00.002 11,6 x 32 mm 1,5 ml amber 100 pieces

volume

#### VIALS - "glass" - "screw cap" - "N9"



Manufactured from hydrolic No:1 glass. Supplied without caps & septas.

Offers perfect shape, very low dimensional tolerance and exact wall thickness for optimum performance.

> Featured with volume graduations and marking area.

### CAPS & SEPTAS - "for N9 vials"





> Offer optimum system performance. Designed to work excellently with needles. All of them are specially sized for proper sealings.

> Packed in tamper-proof evident, transparent, zip-locked bags that allow easy identification.

product specifications

silicone / PTFE - without slit

silicone / PTFE - with slit

silicone / PTFE - cross slit

catalogue number	vial dimensions	volume	color	pack quantity
095.01.001	11,6 x 32 mm	1,5 ml	clear	100 pieces
095.01.002	11,6 x 32 mm	1,5 ml	amber	100 pieces





Manufactured from hydrolic No:1 glass with perfect shape.

Very low dimensional tolerance and exact wall thickness for perfect fit to vials with N8 neck size.

Offers perfect solutions for applications where sample volume is limited.

catalogue number	product specifications	volume	vial dimensions	pack quantity
097.05.106	conical bottom	0,1 ml	5,0x31,0 mm	100 pieces
097.05.107	with P.P spring	0,1 ml	5,0x29,0 mm	100 pieces
097.05.108	flat bottom	0,25 ml	5,0x31,5 mm	100 pieces



for N9 vials

096.01.001 096.01.002

096.01.004

#### **INSERTS** - "glass" "for N9 size vials"

pack quantity

100 pieces

100 pieces

100 pieces

Manufactured from hydrolic No:1 glass with perfect shape.

Very low dimensional > tolerance and exact wall thickness for perfect fit to vials with N9 neck size.

Offer perfect solutions for applications where sample volume is limited.

catalogue number	product specifications	volume	vial dimensions	pack quantity
097.05.110	conical bottom	0,2 ml	6,0x31,0 mm	100 pieces
097.05.111	with P.P spring	0,1 ml	5,7x29,0 mm	100 pieces
097.05.109	flat bottom	0,3 ml	5,8x31,5 mm	100 pieces

### VIALS - "glass" - "crimp cap" - "N11"




 Manufactured from hydrolic No:1 glass. Supplied without caps & septas.

> Offers perfect shape, very low dimensional tolerance and exact wall thickness for optimum performance.

 Featured with volume graduations and marking area.

### CAPS & SEPTAS - "for N11 vials"





> Offer optimum system performance. Designed to work excellently with needles. All of them are specially sized for proper sealings.

> Packed in tamper-proof evident, transparent, zip-locked bags that allow easy identification.

catalogue number	vial dimensions	volume	color	pack quantity	catalogue number	cap type	product specifications	pack quantity
095.02.001	11,6 x 32 mm	1,5 ml	clear	100 pieces	096.02.001	crimp	silicone / PTFE - without slit	100 pieces
095.02.002	11,6 x 32 mm	1,5 ml	amber	100 pieces	096.02.002	crimp	rubber / TEF - without slit	100 pieces



### VIALS - "glass" - "screw cap" - "N13"

Manufactured from hydrolic No:1 glass with perfect shape, very low dimensional tolerance and exact wall thickness for optimum performance.

catalogue number	vial dimensions	volume	color	pack quantity
095.05.001	14,75 x 45 mm	4,0 ml	clear	100 pieces
095.05.002	14,75 x 45 mm	4,0 ml	amber	100 pieces
CAPS	& SEPTAS	perforr	nance. D	um system Designed to
		All of th	nem are sp	with needles. becially sized

for proper sealings. Packed in tamper-proof evident, transparent, zip-locked bags.

catalogue number	product specifications	pack quantity
096.05.003	silicone / PTFE - without slit	100 pieces
096.05.004	rubber / FEP - without slit	100 pieces

VIALS - "glass" - "screw cap" - "N15"





catalogue number

095.06.003

Manufactured from hydrolic No:1 glass with perfect shape, very low dimensional tolerance and exact wall thickness for optimum performance.

catalogue number	vial dimensions	volume	color	pack quantity
095.06.001	18,5 x 66 mm	12,0 ml	clear	100 pieces
095.06.002	18,5 x 66 mm	12,0 ml	amber	100 pieces
	& SEPTAS	perform work e All of ti for pro ➤ Pa evider locked	mance. E excellently hem are sp oper sealing cked in t nt, transp	um system Designed to with needles. Decially sized gs. tamper-proof parent, zip- t allow easy

product specifications white septum / beige PTFE - without hole

100 pieces



### VIALS - "glass" - "screw cap" - "N20"

Manufactured from hydrolic No:1 glass. Supplied without caps & septas.

Offers perfect shape, very low dimensional tolerance and exact wall thickness for optimum performance.

catalogue number	vial dimensions	volume	color	pack quantity
095.03.001	22,7 x 86,0 mm	22,0 ml	clear	100 pieces
095.03.002	22,7 x 86,0 mm	22,0 ml	amber	100 pieces

### CAPS & SEPTAS - "for N20 vials"



> Offer optimum system performance. Designed to work excellently with needles. All of them are specially sized for proper sealings.

> Packed in tamper-proof evident, transparent, ziplocked bags that allow easy identification.

catalogue	product	pack
number	specifications	quantity
096.05.001	silicone / PTFE - without hole	100 pieces



VIALS - "glass" - "crimp cap" - "N20"

Manufactured from hydrolic No:1 glass. Supplied without caps & septas.

> Offers perfect shape, very low dimensional tolerance and exact wall thickness for optimum performance.

vial dimensions	volume	color	pack quantity
20,5 x 54,5 mm	10,0 ml	clear	100 pieces
20,5 x 54,5 mm	10,0 ml	amber	100 pieces
22,5 x 46,0 mm	10,0 ml	clear	100 pieces
22,5 x 46,0 mm	10,0 ml	amber	100 pieces
22,5 x 75,5 mm	20,0 ml	clear	100 pieces
22,5 x 75,5 mm	20,0 ml	amber	100 pieces
	dimensions 20,5 x 54,5 mm 20,5 x 54,5 mm 22,5 x 46,0 mm 22,5 x 46,0 mm 22,5 x 75,5 mm	dimensions         volume           20,5 x 54,5 mm         10,0 ml           20,5 x 54,5 mm         10,0 ml           22,5 x 46,0 mm         10,0 ml           22,5 x 46,0 mm         10,0 ml           22,5 x 75,5 mm         20,0 ml	dimensions         volume         color           20,5 x 54,5 mm         10,0 ml         clear           20,5 x 54,5 mm         10,0 ml         amber           22,5 x 46,0 mm         10,0 ml         clear           22,5 x 46,0 mm         10,0 ml         amber           22,5 x 46,0 mm         10,0 ml         amber           22,5 x 75,5 mm         20,0 ml         clear

### CAPS & SEPTAS - "for N20 crimp vials"



> Offer optimum system performance. Designed to work excellently with needles. All of them are specially sized for proper sealings.

➤ Packed in tamper-proof evident, transparent, ziplocked bags that allow easy identification.

catalogue	product	pack
number	specifications	quantity
096.03.001	silicone / PTFE - without slit	100 pieces



### VIALS - "glass" - "screw cap" - "N24"

Manufactured from hydrolic No:1 glass. Supplied without caps & septas.

> Offers perfect shape, very low dimensional tolerance and exact wall thickness for optimum performance.

catalogue number	vial dimensions	volume	color	pack quantity
095.03.011	27,5 x 95,0 mm	40,0 ml	clear	100 pieces
095.03.012	27,5 x 95,0 mm	40,0 ml	amber	100 pieces

CAPS & SEPTAS - "for N24 vials"



> Designed to work excellently with needles. Specially sized for proper sealings. Packed in tamper-proof evident, transparent, zip-locked bags that allow easy identification of interior.

catalogue number	product specifications	pack quantity
096.05.011	silicone / PTFE - without hole	100 pieces
096.05.012	silicone / PTFE - with hole	100 pieces





### CRIMPERS & DECAPPERS - "manual"

> Manual crimpers and decappers are much lighter than the standard alternatives. They never create fatigue after long extended working periods.

> Ergonomical design offers improved comfort over blocky metal grips.

Offers adjustable crimping pressure by a easily accessible and well visible knob on the crimping head.

> Activated by bottom handle motion guarantees faster and safer hold of the tool during crimping.

> Due to the design of the crimper head better vertical clearence over the vial is assured.



Bottom pull handle design for faster and safer hold of the tool during crimping and decapping.

catalogue number	product descriptions	pack quantity
097.01.011	crimper - for N 11 caps	1 piece
097.01.020	crimper - for N 20 caps	1 piece
097.02.011	decapper - for N 11 caps	1 piece
097.02.020	decapper - for N 20 caps	1 piece



Offers adjustable crimping pressure by an easily accessible and well visible knob on the crimping head.



catalogue number	for viais diameter		viai array	LxWxH	rack color	pack quantity
095.95.001	11,60 mm	50	5 x 10	110x195x22 mm	blue	1 piece
095.95.002	14,75 mm	50	5 x 10	115x240x30 mm	dark blue	1 piece

### TUBE BOX - "100 well" - "hinged lid"

➤ Manufactured from autoclavable polypropylene with high mechanical strength.Guarantees high temperature resistance between -20°C to +121°C.

➤ Uniquely designed to carry 100 vials with 11,0 - 12,0 mm diameter in 10 x 10 array. Easily stackable for reducing storage space.

> Hinged lid with built-in stop allows easy one-handed operation and access to vials.

> Clear box lid enables easy identification of box content and protects the vials from dust and other environmental effects.

Different color options offer visual sorting and organising of different vials.

> Alphanumerical index both on tube rows and the lid enables easy identification of tube positions.

### chromatography & spectroscopy

RACKS / WORKSTATIONS "for vial"


 Manufactured from polycarbonate with high mechanical strength.

Uniquely designed to carry 50 pieces of 2,0 ml & 5,0 ml volume vials in 10 x 5 array.

> Optimum design of the wells keeps the vials at their positions firmly and vertical.

 Alphanumerical index on vial rows enables easy identification of vial positions.

> Featured with a frosted write on and labelling area at the front side of the workstation.




Racks can be stacked both empty or with vials on top of each other for space saving solutions.



catalogue number	lid type	for vials diameter	well quantity	vial array	LxWxH	rack color	pack quantity
080.01.002B	hinged	11,6 mm	100	10 x 10	141x151x53 mm	blue	1 piece
080.01.002P	hinged	11,6 mm	100	10 x 10	141x151x53 mm	purple	1 piece
080.01.002R	hinged	11,6 mm	100	10 x 10	141x151x53 mm	ruby 📃	1 piece



Clear box lid provides protection of vials from environmental effects.



Alphanumerical index enables easy identification of vial positions.



Different colors offer visual sorting and organising of different samples.



Corners frames enable perfect stacking on each other without sliding.

# chromatography & spectroscopy



## CUVETTES - "polystyrene" - "12,5 x 12,5 x 45 mm"

Manufactured from glass-clear polystyrene with 12,5 x 12,5 x 45 mm overall dimensions as single use.

> Can be both used for chemistry and life science applications.

➤ Wavelength operating range from 340 to 900 nm. Offers a light path of 10 mm with clear and clean optical path length.

> Optimised shape and narrow wall thickness provide increased heat transfer resulting in more constant sample temperatures during measurements.

Groupped by mould cavity and packed in same box to ensure lowest variation of absorbtion coefficient.

 Eliminates cross contamination risk associated with washing and re-using such as glass cuvettes.

# Available 2 cuvettes: Macro cuvettes Semi-micro cuvettes

Supplied as 100 cuvettes packed in a styrofoam box with a cover.

catalogue number	cuvette type	product descriptions	material	wavelength range	light path	volume	internal width	pack quantity
098.02.002	macro	with clear wall & without cap	polystyrene	340 - 900 nm	10 mm	2,5-4,5 ml	10 mm	100 pieces
098.02.001	semi-micro	with clear wall & without cap	polystyrene	340 - 900 nm	10 mm	1,5-3,0 ml	4 mm	100 pieces



## CUVETTES - "glass" - "12,5 x 12,5 x 45 mm"

Manufactured from polished quartz glass or polished optical glass with 12,5 x 12,5 x 45 mm dimensions as multi-use.

> They offer clear and clean optical path length and fit to all standard spectrophotometer cuvette holders.

> Can be both used for chemistry and life science applications.

Quartz cuvettes provide wavelength operating range from 190 to 2.500 nm.

 Optical glass cuvettes provide wavelength operating range from 340 to 2.500 nm.

> Optimised shape, precise dimensions with tolerance less than 0,1 % mm and excellent wall thickness provide accurate resulting during measurements.

# Macro cuvettes Available 3 cuvettes:> Semi-micro cuvettes Micro cuvettes

> Supplied as 2 cuvettes packed in a polystyrene box for protection from dust and other environmental effects.

catalogue number	cuvette type	product descriptions	material	wavelength range	light path	volume	internal width	pack quantity
098.01.001	macro	with clear wall & PTFE cap	ES Quartz	190 - 2500 nm	10 mm	3,50 ml	10 mm	2 pieces
098.01.002	semi-micro	with frosted wall & PTFE cap	ES Quartz	190 - 2500 nm	10 mm	1,40 ml	4 mm	2 pieces
098.01.003	micro	with frosted wall & PTFE cap	ES Quartz	190 - 2500 nm	10 mm	0,70 ml	2 mm	2 pieces
098.01.004	macro	with clear wall & PTFE cap	optical glass	340 - 2500 nm	10 mm	3,50 ml	10 mm	2 pieces
098.01.005	semi-micro	with frosted wall & PTFE cap	optical glass	340 - 2500 nm	10 mm	1,40 ml	4 mm	2 pieces
098.01.006	micro	with frosted wall & PTFE cap	optical glass	340 - 2500 nm	10 mm	0,70 ml	2 mm	2 pieces

## chromatography & spectroscopy

## CUVETTES - "glass" - "12,5 x 52,5 x 45 mm"

Manufactured from polished quartz glass or polished optical glass with 12,5 x 52,5 x 45 mm dimensions as multi-use for chemistry and life science applications.

They offer clear and clean optical path length and fit to all standard spectrophotometer cuvette holders.

Quartz cuvettes provide wavelength operating range from 190 to 2.500 nm.

Optical glass cuvettes provide wavelength operating range from 340 to 2.500 nm.

> Optimised shape, precise dimensions with tolerance less than 0,1 % mm and excellent wall thickness provide accurate resulting during measurements.



> Supplied as 2 cuvettes packed in a polystyrene box for protection from dust and other environmental effects.



catalogue number	cuvette type	product descriptions	material	wavelength range	light path	volume	internal width	pack quantity
098.01.007	macro	with clear wall & PTFE cap	ES Quartz	190 - 2500 nm	50 mm	17,5 ml	10 mm	1 piece
098.01.008	semi-micro	with frosted wall & PTFE cap	ES Quartz	190 - 2500 nm	50 mm	7,00 ml	4 mm	2 pieces
098.01.009	micro	with frosted wall & PTFE cap	ES Quartz	190 - 2500 nm	50 mm	3,50 ml	2 mm	2 pieces
098.01.010	macro	with clear wall & PTFE cap	optical glass	340 - 2500 nm	50 mm	17,5 ml	10 mm	1 piece
098.01.011	semi-micro	with frosted wall & PTFE cap	optical glass	340 - 2500 nm	50 mm	7,00 ml	4 mm	2 pieces
098.01.012	micro	with frosted wall & PTFE cap	optical glass	340 - 2500 nm	50 mm	3,50 ml	2 mm	2 pieces

## BOX - "for cuvettes"

> Manufactured from polypropylene with 120x112x60 mm dimensions for safe handling and holding 12 cuvettes with 10 mm width.

Hinged lid secures clasps and offers convenient use of the box. Removable cuvette insert helps easy cleaning.

The inside height designed to accomodate all cuvettes.

catalogue number	box color	pack quantity
098.03.001B	blue	1 piece
098.03.001P	purple 📃	1 piece
098.03.001R	ruby	1 piece

## RACK - "for cuvettes"

► Manufactured from polypropylene with 210x70x35 mm dimensions for safe handling and holding 16 cuvettes with 10 mm width.

> Alphanumerical index on cuvette rows enables easy identification of tube positions.

> 2 tier body form offers clear visibility option from horizontal direction.

catalogue number	box color	pack quantity
098.03.002B	blue	1 piece
098.03.002P	purple 📃	1 piece
098.03.002R	ruby	1 piece





Different color options offer visual sorting and organising of different cuvettes.





# chromatography & spectroscopy

## **TLC SEPARATION TANK**

➤ TLC developing tanks are used to run up to 5 TLC plates for separation. The tank can be equilibrated for 30 minutes prior to running the plate to yield good result. TLC Developing tank supplied to gather with the lid.

► Rectangular shaped TLC developing tanks are used to develop 20x20 cm TLC plates.



## **TLC PLATES**

Silica 60, specific surface (BET) - 500 m2/g, mean pore size 60A, specific pore volume 0,75 ml/g, particle size 5 - 17 µm standard grade. Binders: highly polimeric products, which are stable in almost all organic solvents and resistant towards aggressive visualisation reagents.



catalogue number	product descriptions	material	dimensions	thickness of layer	pack quantity
108.01.001	TLC precoated plates SIL G-25	glass sheet	20 x 20 cm	0,25 mm	25 pieces
108.01.015	ALUGRAM" Xtra"sheets SIL G / UV 254	aluminium sheet	20 x 20 cm	0,20 mm	25 pieces

## **TLC SPRAY KIT**



 Offers an economical solution for TLC spraying. Provides a fine uniform spray ideally adjusted for TLC practices.

Supplied complete with 100 ml erlenmeyer with sprayer head and a rubber pressure bellow.

## TLC SPRAYER - "with gas canister"

TLC sprayer provide a fine, uniform spray all over the TLC plate surfaces for optimization of TLC plates.

➤ With it's unique design offer easy-touse and easy-to-clean options.

> Based on a simple technology where the aeresol canister is situated above the reservoir bottle.

► A small press of the lever highly pressuries the lower glass reservoir bottle releasing a fine mist of spray.

> Propellant mixture is eco-friendly and does not harms the nature.

> Guarantees homogenous distribution, even coverage and minimum reagent consumption.

► Gas canister serves as handle. Cap fits to all 38 - 40 thread reagent bottles.

catalogue	pack	catalogue	pack
number	quantity	number	quantity
108.02.002	1 piece	108.02.001	1 piece



**Filling:** Pour the TLC reagent into the bottle. Never fill above the shoulder line.



**Mounting:** Attach TLC sprayer to the bottle by turning anticlockwise. Never shake the sprayer during mounting.





**Spraying:** Start spraying with the sprayer and release the button while the sprayer is still moving at the end of the TLC plate to avoid reagent loss. For best performance a spraying angle between 90° and 45° is required.

Also always hold the sprayer at a distance between 15 cm to 30 cm from TLC plate surface.









Individually single packed sterile tubes have printed lot number, production date and expiry date on the package.



Sterile tubes are supplied with a certificate as a guarantee of "DNase, RNase & pyrogen free" criterias and guarantees the documentation of the quality.



Manufactured from ultra clear, high grade polypropylene.

➤ Ultra rugged tube wall guarantees resistance to high centrifugal forces up to 6.000 RCF.

Autoclavable at 121°C for 20 minutes. Caps should not be kept closed during autoclaving process.

> non-sterilized
 > Alternative 3 tubes:> aseptic tubes
 > sterile tubes

➤ Aseptic tubes are manufactured in germ-free, class 10.000 sterile areas.

> Sterile tubes are manufactured in germ-free, class 10.000 sterile production areas and then re-sterilised by gamma irradiation.

 Sterile tubes are supplied with a certificate as a guarantee of "DNase, RNase & pyrogen free" product.

> Caps are manufactured from polyethylene with large ridges for increased grip for easy opening and closing.

Cap inner design ensures hermetical and leak-proof closure. Caps can be opened and closed with single hand. A 3/4 turn of the cap will be sufficient for full closure.

Graduations on side wall offer visual control of the filled volume. Printed marking area on side wall enables easy marking and labelling.

Flat cap top provides multiple options for marking and labelling of the tube.

Precise volume marks at the tube bottom clearly and visually show the liquid volume at the tube bottom.



Precise volume marks at the tube bottom clearly and visually show the liquid volume at the tube bottom.





25

20

15

Printec on sic easy labellin Clear easy vi

Unique cap design with large ridges enables single hand operation. A <sup>3</sup>/<sub>4</sub> turn of the cap will be sufficient for hermetical and leakproof closure of the tube.

Printed marking area on side wall enables easy marking and labelling. Clear graduations for easy volume reference.

clear tubes	amber tubes	volume	tube dimensions	product specifications	packing specifications	pack quantity	box quantity
078.02.001	078.12.001	15 ml	17 x 120 mm	non sterilized	pack in bag	50 pieces	500 pieces
078.02.003	078.12.003	50 ml	30 x 120 mm	non sterilized	pack in bag	50 pieces	500 pieces
078.02.007	078.12.007	15 ml	17 x 120 mm	sterilized - aseptic	pack in bag	50 pieces	500 pieces
078.02.008	078.12.008	50 ml	30 x 120 mm	sterilized - aseptic	pack in bag	50 pieces	500 pieces
078.02.002	078.12.002	15 ml	17 x 120 mm	gamma sterilized - DNA & RNA free	single flow pack	50 pieces	500 pieces
078.02.004	078.12.004	50 ml	30 x 120 mm	gamma sterilized - DNA & RNA free	single flow pack	50 pieces	500 pieces



## TUBES - "centrifuge" "self standing" - "screw cap"

> Manufactured from ultra clear, high grade polypropylene. Self stands on the laboratory benches without the need of any tube support.

> Ultra rugged tube wall guarantees resistance to high centrifugal forces up to 6.000 RCF.

> Autoclavable at 121°C for 20 minutes. Caps should not be kept closed during autoclaving process.

Alternative 3 tubes: > aseptic tubes
 > sterile tubes

> Aseptic tubes are manufactured in germ-free, class 10.000 sterile areas.

> Sterile tubes are manufactured in germ-free, class 10.000 sterile production areas and then re-sterilised by gamma irradiation.

> Sterile tubes are supplied with a certificate as a guarantee of "DNase, RNase & pyrogen free" product.

> Caps are manufactured from polyethylene with large ridges for increased grip for easy opening and closing. Other technical specifications are exactly similar to the conical bottom.

50	~	-
45		
40	GER	MANY
35		
30		
25		
20		
15		
10 7,5 5		

clear tubes	amber tubes	volume	tube dimensions	product specifications	packing specifications	pack quantity	box quantity
078.02.005	078.12.005	50 ml	30 x 120 mm	non sterilized	pack in bag	50 pieces	500 pieces
078.02.009	078.12.009	50 ml	30 x 120 mm	sterilized - aseptic	pack in bag	50 pieces	500 pieces
078.02.006	078.12.006	50 ml	30 x 120 mm	gamma sterilized - DNA & RNA free	single flow pack	50 pieces	500 pieces

## TUBE RACKS - "for 15 & 50 ml conical bottom centrifuge tubes" - "push & hold"

> Manufactured from high grade polypropylene for safe holding and carrying conical bottom centrifuge tubes.

Resistant to most acids, bases, and many commonly used solvents. Guarantees high temperature resistance between -20°C to +121°C.

> Uniquely designed to carry 25 tubes in 5 x 5 array tube compartments for holding the tubes in their position firmly.


> Very easy to use; Just press the tubes slightly into the tube compartments and leave.

 Different color options offer visual sorting and organising of different samples.

> Empty racks are easily stackable for reducing storage space.

> Alphanumerical index on tube rows enables easy identification of tube positions.

catalogue number	for tubes	well quantity	tube array	LxWxH	pack quantity
078.06.015B	15 ml	25	5 x 5	120x150x32 mm	1 piece
078.06.050B	50 ml	25	5 x 5	190x230x35 mm	1 piece




Designed to carry 25 tubes in 5 x 5 array tube compartments.





Unique designed tube compartments hold the tube in their position firmly.

## TUBE RACKS - "for 15 & 50 ml conical bottom centrifuge tubes" - "hedgehog design"

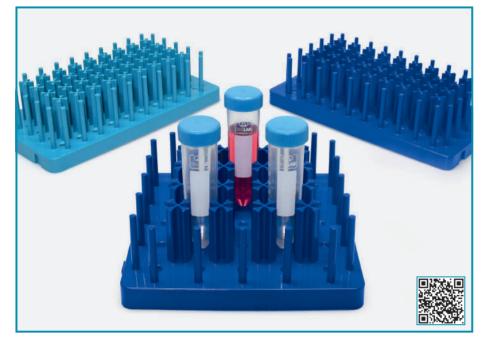

Manufactured from "modified" high quality ABS which enables the rack to be used in water baths without the risk of floating.

Resistant to most acids, bases, and many commonly used solvents.

 "Hedgehog" designed cross formed tube support rods enable uniform aligning of tubes in their position firmly.

 Unique rack design allows easy viewing of the tube contents in 4 angles.

 Different color options offer visual sorting and organising of different samples.

> The interlocking design of the racks makes them ideal for creating a user friendly workstation.

These racks can also be used as drying rack for tubes and chromotography plates.

catalogue number	for tubes	well quantity	tube array	LxWxH	rack color	pack quantity
079.08.015B	15 ml	50	5 x 10	140x270x66 mm	blue	1 piece
079.08.015L	15 ml	50	5 x 10	140x270x66 mm	dark blue	1 piece
079.08.050B	50 ml	25	5 x 5	200x200x70 mm	blue	1 piece
079.08.050L	50 ml	25	5 x 5	200x200x70 mm	dark blue	1 piece



"Hedgehog" designed cross formed tube supports enable uniform aligning of tubes in positions firmly.





The interlocking design of the racks makes them ideal for creating a user friendly workstation.



Different color options offer visual sorting and organising of different samples.



TUBE BOX - "for 15 & 50 ml conical bottom centrifuge tubes" - "cardboard"

Manufactured from freze resistant, water repellent, durable cardboard covered with superior quality chromated paper coating.

> Press on lids perfectly fit to the box body provides a safe and tight closure. Protects the box interior from dust, moisture and other environmental effects.

> Special moisture repellent coating protects box interior from the effects of liquid nitrogen or condensation from refrigerators.

 Sized to fit all standard steel and polycarbonate freezer racks

Chemically resistant to alcohols and mild organic solvents. Offers temperature resistance between -196°C to +121°C.

 Alphanumerical index on the lid for identification of tube positions.

Write on area at the side wall and the lid provides a convenient area for special notes.

catalogue number	for tubes	well quantity	tube array	LxWxH	pack quantity
078.20.015W	15 ml	36	6 x 6	130x130x125 mm	1 piece
078.20.050W	50 ml	16	4 x 4	150x150x125 mm	1 piece





TUBE RACKS - "foldable"

> Manufactured from modified polypropylene which enables the racks to be used in water baths without floating.

➤ Resistant to most acids , bases, and many commonly used solvents. Guarantees high temperature resistance between -20°C to +121°C.

> Raised tube sockets guarantee firm hold of the tubes at their exact positions.

> The alpha numeric grid reference on the top tier of the rack ensures an easy tube location and sample positioning.

► Racks are supplied assembled and folded. Can be ready for use in few seconds with a simple action.

> These racks can be refolded after use for reducing storage area.

catalogue number	tube volume	tube quantity	tube array	pack quantity
079.03.003B	15 ml	50	5 x 10	1 piece
079.03.005B	50 ml	26	4x6/7	1 piece
079.03.006B	15 & 50 ml	21 & 12	assorted	1 piece



Raised tube supports strongly hold the tubes in their position.



## TUBE RACK - "snapable"


> Manufactured from high grade ABS for safe holding and carrying conical bottom centrifuge tubes.

> Uniquely designed to carry 30 x 15 ml and 20 x 50 ml centrifuge tubes simultaneously.

> Rack is supplied already disassembled. Unique and practical "snapping" system allows the rack "ready to use" in few seconds.

> Alphanumerical index on the lid enables easy identification of tube positions.

catalogue	tube	tube	tube	pack
number	volume	quantity	array	quantity
079.04.001	15 & 50 ml	30 & 20	assorted	1 piece

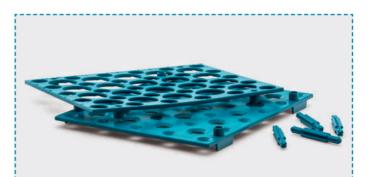

Supplied dismantled and can be assembled in less than minute.



Holes at the bottom plate guarantee firm hold of tubes in their position.



CENTRIFUGE TUBES - "micro" - "with flat cap"

> Manufactured from ultra clear polyropylene with flat caps that ensure smooth opening and closing with one hand. Once closed they guarantee leak-proof closure

 Conical bottom tubes which need a tube rack
 Alternative 2 shapes:

> Skirted tubes which can self stand on benches.

Skirted tubes can self stand on laboratory benches without the need of any tube rack.

➤ Ultra rugged tube wall guarantees resistance to high centrifugal forces up to 20.000 RCF. Optimum tube design offers micro pestle compatibility.

> Reinforced tube bottom ensures added protection against deformation and leakage. Conical bottom form guarantees excellent fit to allmost all centrifuge rotors. Higly polished interior wall guarantees low liquid retention and ensures minimum sample loss.

Autoclavable at 121°C for 20 minutes. Caps should not be kept closed during autoclaving process. Otherwise tubes can be deformed.

# Alternative 2 tubes: gamma sterile tubes

Aseptic tubes are manufactured in germ-free , class 10.000 sterile production areas with extreme sterility control.

Sterile tubes are manufactured in germ-free, class 10.000 sterile production areas and then resterilised by gamma irradiation. Supplied with a certificate as a guarantee of "DNase, RNase & pyrogen free" product.

Improved cap design ensures smooth opening and closing with one hand. Inner design ensures hermetical and leak-proof closure. Cap can be pierced easily with any syringe needle.

Graduations on the side wall offer visual control of the filled volume. Frosted marking area on side wall enables easy marking and labelling.

tubes sterilized	tubes non sterilized	volume	skirt	pack quantity	box quantity
078.03.021	078.03.001	0.5 ml	non	500 pieces	5000 pieces
078.03.022	078.03.002	1.5 ml	non	500 pieces	5000 pieces
078.03.023	078.03.003	2.0 ml	non	500 pieces	5000 pieces
078.03.024	078.03.004	2.0 ml	yes	500 pieces	5000 pieces



CENTRIFUGE TUBES - "micro" - "with safe-lock cap"

Manufactured from ultra clear polyropylene with safe lock caps that ensure smooth opening and closing with one hand.

> Once closed they guarantee leak-proof closure.

> Safe-lock caps have a small clasp that clips onto the rim of the tube preventing accidental openings specially during applications where heating is required.

# Alternative 2 tubes: gamma sterile tubes

> All other tehcnical specifications are identical with flat cap tubes.

tubes sterilized	tubes non sterilized	volume	pack quantity	box quantity
078.05.022	078.05.002	1.5 ml	500 pieces	5000 pieces
078.05.025	078.05.005	5.0 ml	200 pieces	2000 pieces

## TUBE ADAPTER - "for 5 ml microtubes"



 Manufactured from polypropylene.

> Perfectly fits to the bottom part of the 15 ml centrifuge tube rotors.

> They provide the practical usage of the 5 ml tube in a 15 ml rotor.

catalogue	pack
number	quantity
078.05.105	8 pieces

## CRYO TUBES - "sterile"

Designed for the storage and conservation of biological material, human and animal cells at very low temperatures in the gas phase of liquid nitrogene or in cryogenic freezers.

> Manufactured from ultra clear, polyropylene by fully automatic machines. Higly polished interior wall guarantees low liquid retention and ensures minimum sample loss.

> Cryo tubes are manufactured in germ-free, class 10.000 sterile production areas and then resterilised by gamma irradiation.

> Tubes are supplied with a certificate as a guarantee of "DNase, RNase & pyrogen free" product.

Since both cap and tube are made of same material with same coefficient of expansion secure seal at all temperatures.

Caps are featured with cavities for different colored cap inserts which enable easy identification of tube contents. Cap inner design ensures hermetical and leak-proof closure

> The external thread of the tube ensures secure and tight closure and prevents leakage without silicone gasket.

> Caps can be opened and closed with single hand. A 3/4 turn of the cap will be sufficient for full closure.

> Unique foot design enables free standing option. Foot design allows the tube to be fixed at the cryo vial racks. Tube caps can be opened by single hand.

cryo tubes with external thread	tube volume	tube height (mm)	tube diameter (mm)	pack quantity
091.11.102	2.0 ml	48,00 ± 1,00	11,90 ± 0,1	100 pieces
091.11.105	5.0 ml	88,00 ± 1,00	11,90 ± 0,1	100 pieces

## CRYO TUBE CANES - "polycarbonate"



Made from polycarbonate for holding cryo tubes. Ideal tool to insert the cryo tubes into cryo freezer storage or into dewar flasks. With their total length of 310 mm they can carry 6 pieces 2,0 ml and 3 pieces 5,0 ml cryo tubes at a row.

catalogue	pack
number	quantity
092.35.003	12 pieces



**CAP INSERTS** 

Caps are featured with cavities for different colored cap inserts.Cap inserts are made from P.P with different colors for easy identification of tubes.

They fit precisely into the caps by slight pressing. They can be easily dismantled.

catalogue number	cap inserts disc color	pack quantity
091.15.001	white	100 pieces
091.15.002	blue	100 pieces
091.15.003	yellow 📃	100 pieces
091.15.004	red	100 pieces
091.15.005	green	100 pieces



Unique star-base foot design enables free standing option.

Base design allows the tube to be fixed at the cryo vial racks. Tube caps can be opened by single hand without the need of picking up the tubes.



The external thread of the tube ensures secure and tight closure and prevents leakage without silicone gasket.



Graduations on the side wall offer visual control of the filled volume.





well quantity

100

100

100

racks for 1,5 & 2,0 ml

080.01.005B

080.01.005P

080.01.005R

racks for 5,0 ml

080.01.006B

080.01.006P

080.01.006R

Supplied dismantled as a sheet and can easily be assembled in few seconds.

Also can be dismantled in few seconds and forms a flat layer for safe and efficient storage purpose.

well quantity

42

42


42

rack L x W x H

110x260x45 mm

110x260x45 mm

110x260x45 mm



rack color

blue

purple

ruby

pack quantity

1 piece

1 piece

1 piece

<b>MICROTUBE RACKS</b>
"foldable"

Manufactured from polypropylene with high mechanical strength.

Resistant to most acids, bases and > solvents. Guarantees high temperature resistance between -20°C to +121°C.

Alphanumerical index on tube rows enables easy identification of tube positions. Marking areas on wall sides enable easy marking and labelling.

Supplied dismantled as a sheet and can easily be assembled in few seconds.

> Also can be dismantled in few seconds and forms a flat layer for safe and efficient storage purpose.



Different color options offer visual sorting and organising of different samples. After replacement of the tubes racks can be stacked on top of each other for space saving.

## **MICROTUBE RACKS** "monoblock"

Manufactured from polypropylene with high mechanical strength.

Resistant to most acids, bases and solvents. Guarantees high temperature resistance between -20°C to +121°C.

Can be used with a unique base support tray that provides alternative inclined position for the rack.

> According to the wish rack can be used horizontally or with 30 degree angle providing easy filling option of the tubes.

> After replacement of the tubes racks can be stacked on top of each other for space saving solution.

Alphanumerical index on tube rows enables easy identification of tube positions.

> Marking areas on wall sides enable easy marking and labelling.



catalogue number	for tubes	well quantity	tube array	rack L x W x H	rack color	pack quantity
080.01.004B	1,5/2,0 ml	96	8 x 12	205x135x55 mm	blue	1 piece
080.01.004P	1,5/2,0 ml	96	8 x 12	205x135x55 mm	purple	1 piece
080.01.004R	1,5/2,0 ml	96	8 x 12	205x135x55 mm	ruby 📃	1 piece
080.01.007B	5,0 ml	48	6 x 8	205x135x70 mm	blue	1 piece
080.01.007P	5,0 ml	48	6 x 8	205x135x70 mm	purple	1 piece
080.01.007R	5,0 ml	48	6 x 8	205x135x70 mm	ruby 📃	1 piece



## **BASE SUPPORT**

Base support is manufactured from acrylic with 30° inclination. When placed under the tube rack with the help of 30 degree inclination this

support offers easy filling options of the tubes specially	catalogue number	color	pack quantity
when you are sitting.	080.01.101	white	1 piece





> Unique design for to carry 3 different size micro tubes on each tier:

- Bottom row carries 24 x 0,2 ml (2 x 12 array) micro tubes.
  Middle row carries 14 x 0,5 ml (2 x 7 array) micro tubes.
  Upper row carries 12 x 1,5 ml (2 x 6 array) micro tubes.

catalogue number	rack dimensions	rack color	pack quantity
080.01.003B	165x125x60 mm	blue	1 piece
080.01.003P	165x125x60 mm	purple	1 piece
080.01.003R	165x125x60 mm	ruby	1 piece

## **MICROTUBE RACKS** "3 tier"


Manufactured from polypropylene with high mechanical strength.

Resistant to most acids, bases and solvents. Guarantees high temperature resistance between -20°C to +121°C.

The interlocking design of the racks makes them ideal for creating a workstation.

Raised tube slots guarantee firm and stable hold of tubes in vertical position.

> Alphanumerical index on tube rows enables easy identification of tube positions. Marking areas on wall sides enable easy marking and labelling.



## **MICROTUBE RACKS** "double side"

Manufactured from polypropylene with high mechanical strength.

Resistant to most acids, bases and solvents. Guarantees high temperature resistance between -20°C to +121°C.

 Rack has two sides and each side accomodates different size and combination of microcentrifuge tubes.

Clear box lid enables easy identification of rack content and protects the tubes from dust, moisture and other effects.

> Alphanumerical index on tube rows enables easy identification of tube positions. Marking areas on wall sides enable easy marking and labelling.

> Different color options offer visual sorting and organising of different samples.

Racks can be stacked on top of each other for space saving.

Uniquely designed to carry different size micro tubes on both sides.

Upper side: carries 96 x 1,5 ml (6x16 array) micro tubes

▶ Reverse side: carries 48x0,5 ml (6x8 array) and 96 x 0,2 ml (8x12 array) micro tubes.




catalogue number	dimensions	rack color	pack quantity
080.06.002B	290x110x60 mm	blue	1 piece
080.06.002P	290x110x60 mm	purple	1 piece
080.06.002R	290x110x60 mm	ruby	1 piece




Different color options offer visual sorting and organising of different samples



## CRYO TUBE WORK STATION - "50 well"

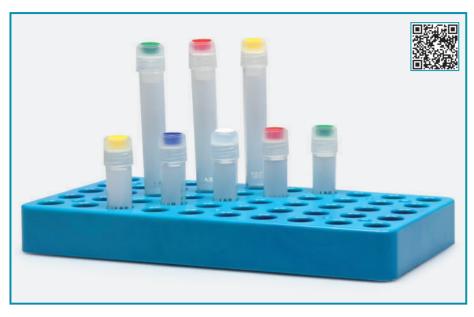

catalogue number	for tubes	well quantity	tube array	LxWxH	rack color	pack quantity
092.01.001B	2,0 - 5,0 ml	50	10 x 5	195x101x24 mm	blue	1 piece
092.01.001P	2,0 - 5,0 ml	50	10 x 5	195x101x24 mm	purple 📃	1 piece
092.01.001R	2,0 - 5,0 ml	50	10 x 5	195x101x24 mm	ruby 📃	1 piece



These racks allow easy one handed opening and closing of tubes thanks to an innovative locking system.

The locking system at the well bottoms ensures that tubes will securely lock in each position and will not return in their axis.



catalogue number	tube array	L x W x H (mm)	rack color	pack quantity
080.01.002B	10 x 10	141x151x53	blue	1 piece
080.01.002P	10 x 10	141x151x53	purple 📃	1 piece
080.01.002R	10 x 10	141x151x53	ruby 📃	1 piece

> Manufactured from polycarbonate with high mechanical strength.

▶ Resistant to most acids, bases and solvents. Guarantees high temperature resistance between -196°C to +121°C.

Uniquely designed to carry 50 pieces of 2,0 ml & 5,0 ml volume cryo tubes in 10 x 5 array.


These racks allow easy one handed opening and closing of tubes thanks to an innovative locking system.

The locking system at the well bottoms ensures that tubes will securely lock in each position and will not return in their axis.

 Alphanumerical index on tube rows enables easy identification of tube positions.

> Featured with a frosted write on and labelling area at the front side.

 Different color options offer visual sorting and organising of different samples

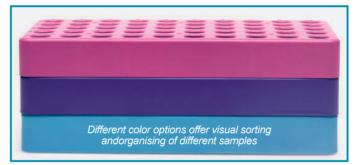

## TUBE BOX - "100 well" - "hinged lid"

➤ Manufactured from polypropylene with high mechanical strength. Resistant to most acids, bases and solvents. Guarantees high temperature resistance between -20°C to +121°C.

> Uniquely designed to carry 100 cryo tubes in 10 x 10 array.

Hinged lid with built-in stop allows easy one-handed access. Featured with a frosted write on area at the front side of the lid.

Clear box lid enables easy identification of box content and protects the tubes from environmental effects.

> Moulded frames at the corners of the tube boxes enable perfect stacking on top each other without sliding.




Alphanumerical index both on tube rows and the lid enables easy identification of tube positions.




Different color options offer visual sorting and organising of different samples.

## CRYO TUBE BOXES - "81 well" - "polycarbonate"

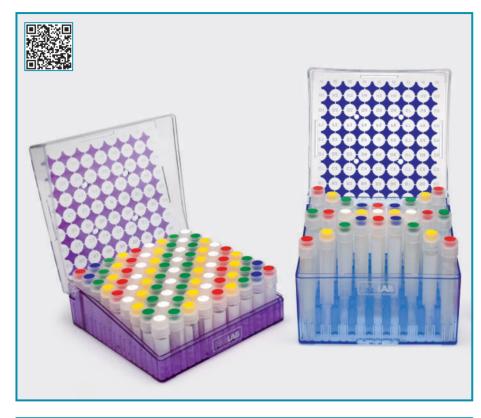


catalogue number	for tubes	well quantity	tube array	LxWxH	box c	olor	pack quantity
093.01.001G	2,0 ml	81	9 x 9	133x133x53 mm	green		1 piece
093.01.001P	2,0 ml	81	9 x 9	133x133x53 mm	purple		1 piece
093.01.001R	2,0 ml	81	9 x 9	133x133x53 mm	ruby		1 piece
093.01.002B	5,0 ml	81	9 x 9	133x133x96 mm	blue		1 piece



Vent and drainage holes at the lid and the base guarantee the best air circulation.



"Hedgehog" designed cross formed tube supports enable uniform aligning of tubes in positions firmly.



both Alphanumerical index tube rows and the lid enables easy identification of tube positions.





## CRYO TUBE BOXES - "81 well" - "cardboard"

> Manufactured from freze resistant, water repellent, durable cardboard covered with superior quality chromated paper coating.

Special moisture repellent coating protects box interior from the effects of liquid nitrogen or condensation from refrigerators.

> Chemically resistant to alcohols and mild organic solvents. Offers temperature resistance between -196°C to +121°C.

Alphanumerical index on the lid for identification of tube positions. Write on area at the side wall and the lid provides a convenient area for special notes.

Press on lids perfectly fit to the box body provides a safe and tight closure. Protects the box interior from dust, moisture and other enviromental effects.

Sized to fit all standard steel and polycarbonate freezer racks

catalogue number	for tubes	well quantity	tube array	LxWxH	pack quantity
092.22.101W	2,0 ml	81	9 x 9	135x135x50 mm	1 piece
092.22.102W	5,0 ml	81	9 x 9	135x135x95 mm	1 piece

Manufactured from polycarbonate with high mechanical strength and high temperature resistance between -196°C to +121°C.

Uniquely designed to carry 81 pieces micro or cryo tubes in 9 x 9 array.

▶ "Hedgehog" designed tube compartments hold the tube in their position firmly. They fit all steel and polycarbonate freezer racks.

Unique design with vent and drainage holes guarantees best, efficient air circulation.

> Forward slope base ensures quick visual orientation. Easily stackable for reducing storage space.

Hinged lid with built-in stop allows very easy access to tubes.

Clear box lid enables easy identification of box content and protects the tubes from dust, moisture and other enviromental effects.

Vent and drainage holes at the lid and the base guarantee the best air circulation.

Alphanumerical index both on tube rows and the lid enables easy identification of tube positions.

Featured with a frosted write on area at the front side of the lid.

Different color options offer visual sorting and organising of different samples.

with

### on Box is supplied together a disposable forceps for easy removal of tubes.





## PCR TUBES - "single cavity"

Single cavity 0.2 ml PCR tubes for thermal transfer and PCR applications are manufactured from ultra clear, virgin polyropylene by fully automatic, human touch free machines.

Manufactured in class 10.000 sterile areas as "DNase, RNase & pyrogen free" product.

Uniform and thin wall design accelerates the thermal heat transfer and shortens the PCR reaction and cycling times.

 Optimum tube dimensions guarantee compatibility with most leading thermal cyclers.  Cap inner design ensures hermetical and leak-proof closure

 Once cap is closed the tubes guarantee perfect sealing during thermal cycling preventing evaporation.

> Cap can be opened and closed with one hand without the risk of sample contamination.

Group packed with lot number, production date and expiry date printed on the package.

catalogue	pack	box
number	quantity	quantity
123.01.002	500 pieces	6 packs/3000 pieces

## PCR TUBES - "8 strip"

8 strip PCR tubes for thermal transfer and PCR applications are manufactured from ultra clear, high grade polyropylene by fully automatic, human touch free machines.

They perfectly fit to all PCR plates and provide fast filling option by 8 channel pipettors.

 Manufactured in class 10.000 sterile areas as "DNase, RNase & pyrogen free" product.

> Uniform and thin wall design accelerates the thermal heat transfer and shortens the PCR reaction and cycling times.

 Unique design offers compatibility with most leading PCR thermal cyclers.

Once caps are closed the tubes guarantee perfect sealing during thermal cycling preventing evaporation. Caps can be opened and closed with one hand without the risk of sample contamination.

 Group packed with lot number, production date and expiry date printed on the package.


catalogue number	volume	product descriptions	pack quantity	box quantity
123.01.028	0,2 ml	clear PCR strips with attached flat caps	12 pieces	10 packs / 120 pieces
123.03.028	0,2 ml	clear PCR strips with separate flat caps	12 pieces	10 packs / 120 pieces

## qPCR TUBES - "8 strip" - "with flat cap"

➤ 8 strip 0,1 ml qPCR tubes for thermal transfer and qPCR applications are manufactured from ultra clear, high grade polyropylene by fully automatic, human touch free machines. Manufactured in class 10.000 sterile areas as "DNase, RNase & pyrogen free" product.

Uniform and thin wall design accelerates the thermal heat transfer and shortens the PCR reaction and cycling times. Low profile tube design offers compatibility with most leading gPCR machines.

Once caps are closed the tubes guarantee perfect sealing during thermal cycling preventing evaporation. Caps can be opened and closed with one hand.

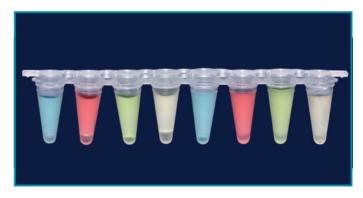



Group packed with lot number, production date and expiry date printed on the package.

catalogue number	volume	product descriptions	pack quantity	box quantity
123.02.028	0,1 ml	clear qPCR strips with seperated flat caps	12 pieces	10 packs / 120 pieces
123.02.018	0,2 ml	clear qPCR strips with seperated flat caps	12 pieces	10 packs / 120 pieces





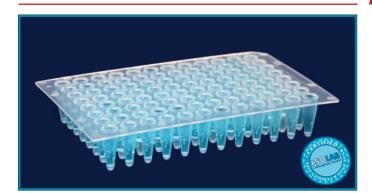

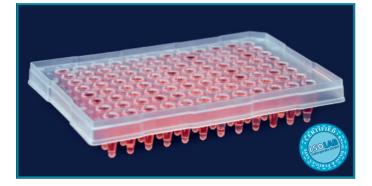

## SEALING FILMS - "for PCR and gPCR plates"

> Manufactured from polyester based film with acrylic adhesive back. "DNase, RNase & pyrogen free" product.

> Guarantees excellent chemical and temperature resistance between -40°C to +120°C.

> Can be used with all kinds of microplates including raised rim and skirted ones. Transparency allows optical analysis possibility of PCR and qPCR applications.

> Allows easier and more accurate positioning and more secure sealing around each well.

> Prevents cross contamination between samples and wells.

> Also does not interfere with cycle reactions and does not cause spills on PCR samples.

## **PCR RACK & WORK STATION**

Manufactured from polypropylene for "before" and "after" use at PCR sampling and applications.

Rack can carry 3 different size PCR tubes & PCR strips.
 96 x 0,2 ml PCR tubes (8x12 array)

- > 12 x strip of 8 PCR tubes (8x12 array)
- 8 x strip of 12 PCR tubes (8x12 array)

Alphanumerical index on tube rows enables easy identification of tube positions.

blue rack	purple rack	ruby rack	rack (mm) dimensions	pack quantity	
089.03.012B	089.03.012P	089.03.012R	125x88x31	1 piece	
<ul> <li>Rack can carry 3 different size tubes</li> <li>32 x 0,2 ml PCR tubes (4x8 array)</li> <li>16 x 0,5 ml PCR tubes (2x8 array)</li> <li>24 x 1,5 ml micro tubes (4x6 array)</li> </ul>					
catalogue number		rack dimensions		pack quantity	
089.03.013	2	10 x 115 x 50 m	m	1 piece	

# life sciences & microscopy & microbiology

## **PCR PLATES**

> 96 well PCR plates with 0,2 ml wells for thermal transfer and PCR applications are manufactured from ultra clear, virgin polyropylene by fully automatic, human touch free machines.

> Manufactured in class 10.000 sterile areas as "DNase, RNase & pyrogen free" product.

> Uniform and thin wall design accelerates the thermal heat transfer and shortens the reaction and cycling times.

Unique design offers compatibility with most leading PCR machines

Alphanumerical index on tube rows enables easy identification of tube positions.

Single packed with lot number, production date and expiry date printed on the package.

catalogue number	product descriptions	pack quantity	box quantity
123.01.096	Non- skirted	10 pieces	5 packs / 50 pieces
123.02.096	Semi skirted	10 pieces	5 packs / 50 pieces



catalogue	product descriptions	pack	box
number		quantity	quantity
124.01.001	Membranes for PCR plates	10 pieces	100 pieces





## FLASKS - "for cell culture"

➤ Manufactured from optically clear polystyrene in germ-free, class 10.000 sterile production areas and then resterilised by gamma irradiation. Supplied with a certificate as a guarantee of "DNase, RNase & pyrogen free" product.

> Offers absolutely flat growth surface with surface activated growth area for fast and efficient growth.

> Special design offers minimized contamination risk. Angled design of the flask neck allows easy access to each corner with 100 % cell retrieval without leaving any dead corners.

> Caps are made from polypropylene with large ridges with increased grip. Cap inner design ensures hermetical and leak-proof closure.

Caps can be opened and closed with single hand. A 2/3 turn of the cap will be sufficient for hermetic and leak-proof closure.

> Graduations on the side wall offer visual control of the filled volume. Marking area on side wall enables easy marking and labelling.

Individually single packed with lot number, production date and expiry date printed on the package.

catalogue number	growth area	working volume	cap type	surface treatment	pack quantity	box quantity
120.11.025	25 cm <sup>2</sup>	7 ml	vent cap with filter	yes	5 pieces	200 pieces
120.11.075	75 cm²	25 ml	vent cap with filter	yes	5 pieces	100 pieces
120.11.175	182 cm²	50 ml	vent cap with filter	yes	5 pieces	40 pieces
120.12.025	25 cm²	7 ml	plug seal cap	yes	5 pieces	200 pieces
120.12.075	75 cm²	25 ml	plug seal cap	yes	5 pieces	100 pieces
120.12.175	182 cm²	50 ml	plug seal cap	yes	5 pieces	40 pieces

## "plug cap for airtight culture"



Plug seal cap usually used for airtight culture applications. Can be used also for open culture when the cap is unscrewed.

## "plug cap for airtight culture"



Vent cap is designed for open culture applications. Includes a contamination preventing hydrophobic membrane 0,2 µm.



Angled design of the flask neck allows easy access to each corner with 100 % cell retrieval without leaving any dead corners.



Ergonomic design minimizes contamination and raised corners at the body enables easy and slip-free stacking possibility.

## CENTRIFUGE TUBES - "for cell culture"

> Manufactured from **FDA approved** ultra clear, high grade polypropylene. Can resist centrifugation up to 6.000 RCF.

> Sterilized with gamma irradiation, free of RNase, DNase, and pyrogene.

 Individual packing eliminates the possible risks of contaminations.

> Their conical bottoms make them suitable for centrifugation tests in immunology, microbiology etc.

Other technical specifications can be seen at catalogue page no 180 - 181.





## MULTIWELL PLATES - "for cell culture"

Widely used plates for handling multiple samples in a single experiment during culture. Manufactured from optically clear polystyrene in germ-free, class 10.000 sterile production areas and then resterilized by gamma irradiation. Supplied with a certificate as a guarantee of "DNase, RNase & pyrogen free" product.

➤ Offers absolutely flat growth surface with surface activated growth area for fast and efficient growth. Unique design guarantees minimized cross contamination risk. They offer also easy handling with slip-free stacking possibility. Lid with air-venting system for controlled gas exchange with low evaporation.

Vented base guarantees excellent air flow between stacked dishes to prevent condensation. Sloped edge allows placement of the lid in one single position. Uniform well volumes always ensures equal growth surface area.

> Individually single packed with lot number, production date and expiry date printed on the package.



Ergonomic design offers minimized contamination risk and easy handling with slip-free stacking possibility.

catalogue number	well quantity	well type	external dimensions (mm)	well dimension	growth area	working volume	surface treatment	pack quantity	box quantity
122.11.006	6	flat	85.4 x 127.6 x 22.5	35.0 x 17.5 mm	9.60 cm <sup>2</sup>	3 ml	yes	1 piece	100 pieces
122.11.012	12	flat	85.4 x 127.6 x 22.5	22.1 x 17.5 mm	3.85 cm <sup>2</sup>	2 ml	yes	1 piece	100 pieces
122.11.024	24	flat	85.4 x 127.6 x 22.5	15.5 x 17.5 mm	1.93 cm <sup>2</sup>	1 ml	yes	1 piece	100 pieces
122.11.048	48	flat	85.4 x 127.6 x 22.5	9.75 x 17.5 mm	0.84 cm <sup>2</sup>	0,5 ml	yes	1 piece	100 pieces
122.11.096	96	flat	85.4 x 127.6 x 16.0	6.50 x 10.8 mm	0.33 cm <sup>2</sup>	0.2 ml	yes	1 piece	100 pieces
122.11.196	96	round	85.4 x 127.6 x 16.0	6.92 x 12.0 mm	0.58 cm <sup>2</sup>	0,2 ml	yes	1 piece	100 pieces

## PETRI DISHES - "for cell culture" - "sterile"


> Manufactured from optically clear, transparent polystyrene specially for cell culture practices.

▶ Manufactured in germ-free, class 10.000 sterile production areas and then resterilized by gamma irradiation.

Supplied with a certificate as a guarantee of "DNase, RNase & pyrogen free" product.

> Stacking ring on the lid and the corresponding base part guarantees secure stacking option.

Surface treated uniform flat growth surface guarantees excellent suspension for cultures.



catalogue number	diameter	height	growth area	working volume	surface treatment	external grip	pack quantity	box quantity
120.13.035	32.8 mm	13 mm	8.5 cm <sup>2</sup>	3 ml	yes	yes	10 pieces	960 pieces
120.13.060	52.0 mm	17 mm	21.2 cm <sup>2</sup>	5 ml	yes	yes	10 pieces	600 pieces
120.13.090	84.6 mm	17 mm	55.0 cm²	12.5 ml	yes	yes	10 pieces	500 pieces







## MAGNIFIER - "table top"

► Multifunctional table-top magnifier offers magnification power of 3X and 5X depending on view direction.

Can be operated by one hand. Offers smooth and easy use with distant and near vision lenses.

> 4 LED bulbs with on/off control provide super bright powerful illumination.

Two separate flexible gooseneck holders enable magnifying lens and illumination angle adjustable in multiangular axes.

> Shadow and flicker free illumination without heat development provides optimal concentration of light.

Aspherical lens provides spherical aberration and distortion free images with edge-to-edge sharpness.

Removable main body can be fixed at table corner with a clamp.

Sturdy base plate inreases the standing efficiency.

> The clamp mechanism at the base enables fixation of objects firmly in place.

catalogue	pack
number	quantity
065.10.001	1 piece

## MAGNIFIER - "handy type"

Hand magnifier offers magnification power of 3X and 5X depending on view direction.

> Handle perfectly fits to hand with a comfortable grip.

Aspherical lens provides spherical aberration and distortion free images with edge-to-edge sharpness.

► LED bulb with on/off control provides super bright powerful illumination.

A rotatable joystick switch enables adjustment of illumination angle in all angles.

catalogue	external	lens	pack
number	dimensions	dimensions	quantity
065.10.006	230 x 100 mm	100 mm	1 piece

MAGNIFIER - "pocket type"

> Perfect magnifier for reading small prints with magnification power of 2X.

> 3 LED bulbs with on/off control provides super bright powerful illumination.

 Ergonomic design enables intuitive movement on the reading material. Delivered in a soft protective bag

catalogue	external	lens	pack
number	dimensions	dimensions	quantity
065.10.004	60 x 145 mm	60 x 100 mm	1 piece



## **REFRACTOMETER - "digital"**

> With a wide measuring range offers a precise measurement and determination of refractive index and Brix values of liquid samples.

> Portable, light weight, compact design guarantees fast and easy measurements also eliminates the reading errors.

> Operation is extremely simple: only with a few drops of sample guarantees fast and reliable measurements.

> Zero point check and calibration can be done with water.

> LED light source around the prism warns the user during the calibration or measurement process.

> Simple and easy to change measuring from % Brix to refractive index. Features with automatic temperature compensation (ATC).

catalogue	measuring range	measuring range	division	ATC
number	% Brix	refractive index	Brix / RI	
618.32.001	0 - 95	1,3330 - 1,5400	0,1/0,0001	yes



Ideal for precise measurement and determination of refractive index and % Brix values of liquid, solid, semi-solid and powder samples. Simple handling and easy to use. Calibration can be done easily with supplied calibration prism.



## **REFRACTOMETER - "hand type"**

A practical alternative for practical yet quick measurement of concentrations of liquids.

Portable and hand-held design enables both laboratory and field applications.

 Models with automatic temperature compensation are specially suitable for field use.

> With focusing eyepiece with soft rubber eyecups for reducing straylight ingress and also avoiding scratches at spectacle lenses.

Calibration is easily done by turning the adjustment screw.

catalogue number	measuring range % Brix	division %	ΑΤϹ
618.21.001	0 - 10	0,1	yes
618.22.001	0 - 18	0,1	yes
618.23.001	0 - 32	0,2	yes
618.24.001	0 - 80	0,5	no
618.25.001	0 - 90	0,5	no

## **REFRACTOMETER - "ABBE"**

> Large optical prism enables excellent boundary line brightness and contrast during measurements.

➤ Adjustable wide field eyepiece with 10X magnification, enables bright and clear images. Super contrast, optical system with 30X magnification guarantees sharp images.

> Equipped with movable, hinged covers to keep light out. Offers connection possibility to a thermostatic circulator.

Featured with a digital thermometer with a large LCD display. Temperature reading is selectible as °C or °F with a precision of 0,1°C or 0,1°F.

catalogue number	618.41.001
external dimensions (mm)	270 x 180 x 370
refractive index (nD)	1,3000 - 1,7000
dissolved solid Brix (%)	0 - 95
accuracy	± 0,0002
water inlet / outlet Ø (mm)	10
digital thermometer	LCD display - 34 x 14 mm
temperature range (°C)	0 - 70
temperature uniformity (°C)	± 0,1



## MICROSCOPE - "biological"

> Ideal for academic and clinical research with excellent optical system, outstanding resolution and definition.

Unique design with backward nosepiece offers larger working space and enables convenient handling.

➤ Featured with a 360° rotatable binocular head inclined at 30 with interpupillary distance adjustable 50 mm - 75 mm.

> Wide field eyepiece with 10X magnification power, 20mm lens diameter enables bright and clear images

➤ 4X, 10X, 40X and 100X plan achromatic objectives guarantee net and sharp images. NA 1,25 abbe condenser with iris diaphram and filter holder guarantees ideal contrast.

142x138 mm square mechanical stage with 76 mm leftright and 55 mm back-forward movement offers easy use.

➤ Coarse and fine adjustment is enabled with upper limit safety with 0,002 mm fine division and 20 mm maximum moving limit. Each rotation of control knob enables 37,7 mm coarse stroke and 0,2 mm fine stroke.

> Featured with a power supply 100 Volt - 220 Volt multi input rating and easily replaceable, super bright and powerful LED illumination with adjustable light power.

> Supplied with dust cover and immertion oil.

catalogue	pack
number	quantity
613.21.001	1 piece



Featured with a 360° rotatable binocular head inclined at 30 with interpupillary distance adjustable 50 mm - 75 mm.



Featured with a power supply 100 Volt - 220 Volt multi input rating and super bright. LED illumination with adjustable light power.



142x138 mm square mechanical stage with 76 mm left-right and 55 mm back-forward movement offers easy use.



Coarse and fine adjustment is enabled with upper limit safety with 0,002 mm fine division and 20 mm maximum moving limit.

## **IMAGE PROJECTOR**

Consists of a scientific research camera with Aptina CMOS sensor for advanced video and image processing.

> Offers excellently clear projection of the images from microscopes to screens and practical photo and video shootings.

Featured with hardware resolution among 0,35M to 14M and USB 2.0 interface for high speed data transmission. Ultra-fine color engine guarantees perfect color reproducibility.

Other pces are; Maximum resolution: 8.000.000 Pixels / Pixel size: 1,67 µm x 1,67 µm / Dynamic range: 65,2 dB. / SN ratio: 34 dB / Spectral range: 380 – 650 nm / Exposure: 0,38 ms – 2000 ms, ROI Auto & Manual.

> Sturdy zinc aluminium housing for a very long life cycle.

catalogue	pack
number	quantity
613.31.001	1 piece



# <image>

# life sciences & microscopy & microbiology

## MICROSCOPE - "stereo"

Offers ergonomic design, sharp image quality, high resolution and wide field of viewing for academic, industrial and clinical applications.

➤ Featured with a 360° rotating binocular head inclined at 45 with interpupillary distance adjustable 52 mm - 75 mm.

> Wide field eyepiece with 10X magnification power with 20mm view field enables bright and clear images.

➤ Adjustable objective with 0,7 X to 4,5X magnification power provides a wide and clear viewing field of 20 mm diameter with zoom ratio of 1:6,4

Featured with a power supply 100 Volt - 220 Volt multi input rating and easily replaceable, super bright and powerful LED illumination from bottom and overhead.

> Supplied with dust cover, and circular examination glass plate and an additional examination plate with one side black and other side white.

catalogue	pack
number	quantity
613.22.001	1 piece



Supplied with an additional examination plate with one side black and other side white.



Featured with a 360° rotating binocular head inclined at 45 with interpupillary distance adjustable 52 mm - 75 mm.



Objective with 0,7 X to 4,5X magnification power provides a wide and clear viewing field of 20 mm diameter with zoom ratio of 1:6,4.





Featured with a power supply 100 Volt - 220 Volt multi input rating and super bright and powerful. LED illumination from bottom.

Featured with a power supply 100 Volt - 220 Volt multi input rating and super bright and powerful. LED illumination from overhead.

## MICROSCOPE SMART TABLET

Offers a built-in image capture and video record 9.7 inch touch screen tablet, with a resolution of 2048(H) x 1536(V).

> Consists of a 5.000.000 pixels camera system and 1080p video support.

> Futures for measuring line lenght, curve lenght, parallel line distance and point line distance. Also geometric measurements are available such as Radius of the circle line, three point circle and concentric circle.

> Supplied with adapting lens to convert from C-mount to 23.2 mm eyepiece tube, with 30.0 mm adaptor rings and 30.5 mm adaptor rings to fit most of the microscopes.

catalogue	pack
number	quantity
613.41.001	1 piece







## COVER GLASSES - "for counting chambers"



> Manufactured from special optical glass with ground and polished edges.

> These cover glasses are used to cover specimens in counting chambers.

> With their excellent flat surfaces they adhere perfectly on the chambers and define the volume of the cell suspention over the counting grid.

> Their substential thickness of 0,4 mm offers perfect results without bending under capillary forces.

Their practical dimensions of 20 x 26 mm enables use with amost chamber types.



## **BLOOD COUNTING CHAMBERS**

Manufactured from special optical glass according to DIN 12847 standard.

> It is possible to count different types of cells such as leukocyte, erythrocytes with simple methods under a microscope.

Tolerance of the depth of the chamber does not exceeds 2 %.

Counting grids are engraved into two polished surfaces at the central station.

> ➤ "Neubauer - improved" chamber with grid consists of 3 x3 large squares with areas of 1 mm2 each.

## > Alternative 2 chambers:

• **"Thoma - new" chamber** with 0,1 mm depth. The grid covers an area of 1,1 x 1,1 mm<sup>2</sup>.

 Supplied in a polystyrene box together with two haemocytometer cover glasses.

catalogue number	product descriptions	pack quantity
075.03.001	Neubauer Improved	1 piece
075.03.002	Thoma - New	1 piece

## CELL COUNTER - "mechanical"

Multi use mechanical counter with maximum counting capacity up to 9999 for counting blood cells, bacterial colonies, drops of liquids, or any repetitive action.

Featured a quick reset knob, lens window for easy reading, and finger ring for a secure grip.

> Sturdy and chrome finished metal housing offers long life cycle.

catalogue pack number quantity 081.14.002 1 piece





## CELL COUNTER - "digital"

Multi-use digital counter with maximum counting capacity up to 9999 for counting blood cells, bacterial colonies, drops of liquids, or any repetitive action.

> Featured a quick reset knob, lens window for easy reading, and finger ring for a secure grip.

> Sturdy and chrome finished metal housing offers long life cycle.

catalogue	pack
number	quantity
081.14.001	1 piece

▶ Manufactured from optical grade, hydrolic 1 class borosilicate glass according to DIN ISO 8255 standard.

> Fully automatic production cycles ensure dust-free, absolutely clean cover glasses with excellent flatness and smooth surfaces.

▶ With their thickness varying 0,13 mm - 0,17 mm they guarantee perfect clearness.

Their edges are cut with highest precision assuring flawless results.

Alternative 2 glasses: economical quality cover glasses
 superior quality cover glasses

economic quality	box quantity	superior quality	box quantity	pack quantity
075.00.001	10 packs	075.01.001	10 packs	100 pcs
075.00.002	10 packs	075.01.002	10 packs	100 pcs
075.00.003	10 packs	075.01.003	10 packs	100 pcs
075.00.004	10 packs	075.01.004	10 packs	100 pcs
075.00.007	5 packs	075.01.007	10 packs	100 pcs
	075.00.001 075.00.002 075.00.003 075.00.004 075.00.005 075.00.006	075.00.001         10 packs           075.00.002         10 packs           075.00.003         10 packs           075.00.004         10 packs           075.00.005         10 packs           075.00.006         5 packs	075.00.001         10 packs         075.01.001           075.00.002         10 packs         075.01.002           075.00.003         10 packs         075.01.003           075.00.004         10 packs         075.01.004           075.00.005         10 packs         075.01.005           075.00.005         10 packs         075.01.005           075.00.006         5 packs         075.01.006	economic quality         box quantity         superior quality         box quantity           075.00.001         10 packs         075.01.001         10 packs           075.00.002         10 packs         075.01.002         10 packs           075.00.003         10 packs         075.01.003         10 packs           075.00.004         10 packs         075.01.004         10 packs           075.00.005         10 packs         075.01.005         10 packs           075.00.005         10 packs         075.01.005         10 packs           075.00.006         5 packs         075.01.007         10 packs           075.00.007         5 packs         075.01.007         10 packs

## SLIDES

➤ Manufactured from optical grade, hydrolic 3 class soda lime glass according to DIN ISO 8037-1 standard.


> Fully automatic production cycles ensure dust-free, absolutely clean cover glasses with excellent flatness and smooth surfaces.

> With their extremely flat pre-cleaned surfaces free of dust and oil and their 1 mm thickness they assure flawless results.

# Alternative 2 slides. economical quality cover glasses superior quality cover glasses

 Superior quality color coded slides has ground edges with 45° edge angle.

 Color coded with 5 different colors enables fast, easy identification.

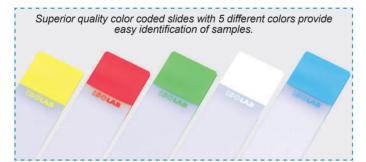





Superior quality slides have ground edges with 45° edge angle.

economic quality	superior quality	product descriptions	edge angle	color code	pack quantity	box quantity
075.05.001		Cut edges, Plain	90° Degree		50 pieces	50 packs
075.05.002		Cut edges, Frosted one end one side	90° Degree		50 pieces	50 packs
075.05.003		Ground edges, Plain	90° Degree		50 pieces	50 packs
075.05.004		Ground edges, Frosted one end two side	90° Degree		50 pieces	50 packs
	075.02.005	Ground edges, Color Frosted	45° Degree	white	50 pieces	50 packs
	075.02.006	Ground edges, Color Frosted	45° Degree	yellow	50 pieces	50 packs
	075.02.007	Ground edges, Color Frosted	45° Degree	green	50 pieces	50 packs
	075.02.008	Ground edges, Color Frosted	45° Degree	pink	50 pieces	50 packs
	075.02.009	Ground edges, Color Frosted	45° Degree	blue	50 pieces	50 packs





SLIDE BOX - "with hinged lid"

> Manufactured from robust polypropylene providing perfect storage and transportation of slides.

> Moulded grooved slide slots with numerical index hold the microscope slides at the position.

➤ Hinged lid offers safe closing and easy opening. Once the lid is closed the box interior is protected from environmental effects.

 Manufactured from robust ABS providing perfect storage and transportation option of slides.
 Moulded grooved slide slots with numerical index hold the microscope slides at the position.

> Hinged lid with steel latch offers safe closing and easy opening. Once the lid is closed the box interior is protected from environmental effects.



Different color options offers easy slide classification and minimize the possiblity of sample mix-up.

slide box for 25 slides	slide box for 50 slides	slide box for 100 slides	box color	pack quantity
076.02.000W	076.02.001W	076.02.002W	white	1 piece
076.02.000B	076.02.001B	076.02.002B	blue 📃	1 piece
076.02.000P	076.02.001P	076.02.002P	purple 📃	1 piece
076.02.000R	076.02.001R	076.02.002R	ruby	1 piece
076.02.0000	076.02.0010	076.02.0020	orange 📃	1 piece



SLIDE BOX CABINET

> Manufactured from acrylate with 5 slide box compartment.

> They offer practical solutions for storing the slide boxes on top of each other. Can be linked to each other by magnetic fixators to form longer working station.

catalogue	pack
number	quantity
076.02.101	1 piece






catalogue number	slide capacity	box color	pack quantity
076.02.012W	100 slides	white	1 piece
076.02.012B	100 slides	blue	1 piece
076.02.012R	100 slides	ruby	1 piece
076.02.012P	100 slides	purple	1 piece
076.02.0120	100 slides	orange 📃	1 piece



SLIDE BOX - "with steel latch"

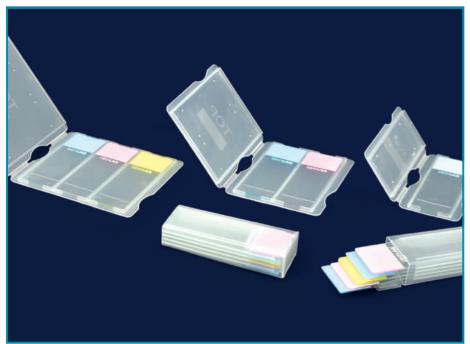

## **SLIDE MAILERS**

Manufactured polypropylene for storing and shipping of slides.

► Flat mailers can carry 1 or 2 or 3 slides depending on the type.

Easy-to-close snaps hold the mailers always securely closed while keeping the interior away from dust, moisture and other envirometal effects.

Box mailer with slotted channels can hold 5 slides separated from each other.

The hinged lid protects the mailer interior from dust and other environmetal effects.

catalogue number	slide capacity	pack quantity	box quantity
076.05.001	1 slide	1 piece	100 pieces
076.05.002	2 slides	1 piece	100 pieces
076.05.003	3 slides	1 piece	100 pieces
076.05.004	5 slides	1 piece	100 pieces





Removal of the slides are done easily by pressing the edge of the slide which lifts the other side of the slide.

## **SLIDE WALLET RACK**



Manufactured from thick and robust acrylic for easy and safe storage of 5 slide wallets. For easy insertion and removal of the slide wallets also protects the wallet interior.

> Easily stackable due to the body form for reducing storage space.

catalogue	pack
number	quantity
076.01.003	1 piece



## SLIDE WALLETS - "cardboard"

> Manufactured from thick and robust cardboard with 20 pieces slide capacity. Consists of 2 parts: A base for slide compartments and two folding covers.

> Unique recessed design of the slide compartments avoids the risk of covers touching the slides.

 Alphanumerical index on slide rows enables easy identification of slide positions.

Printed marking area on side walls of the covers enables easy marking and labelling.

> Slide compartments have finger slots for easy and fast removal of the slides.

> Cardboard hinged covers protect the slides from environmental effects.

catalogue number	dimension	rack color	pack quantity
076.01.001W	205x340x10 mm	white	1 piece
076.01.001B	205x340x10 mm	blue	1 piece
076.01.001R	205x340x10 mm	red	1 piece
076.01.001Y	205x340x10 mm	yellow 📃	1 piece
076.01.001G	205x340x10 mm	green 🗾	1 piece





> Manufactured from heat resistant glass with counter sinking process which guarantees bubble-free dishes.

 Lids perfectly fit to the body enabling easy handling.

> Extremely flat bottom base guarantees an even media dispersion and uniform cell growth.

Fire polished body and lid edges enable safe use by reducing the risk of breakage.









Manufactured from optically clear, transparent polystyrene for multiple use in microbiology and bacteriology. Manufactured by fully automatic, human touch free machines.


Ideal body form guarantees excellent use with automatic filling machines. Vented lids enable consistent and effective practice.

# Alternative 2 dishes: Aseptic petri dishes Gamma sterile petri dishes


Aseptic petri dishes are manufactured in germ-free, class 10.000 sterile production areas with extreme sterility control.

> Sterile petri dishes are manufactured in germ-free, class 10.000 sterile production areas and then resterilized by gamma irradiation. Sterile petri dishes are supplied with a certificate as a guarantee of "DNase, RNase & pyrogen free" product.

diameter x height	section	clean room produced	box quantity	gamma sterilized	box quantity
60 x 15 mm	1 section	081.02.061	500 pieces	081.02.161	500 pieces
90 x 17 mm	1 section	081.02.091	500 pieces	081.02.191	360 pieces
90 x 17 mm	2 section	081.02.092	500 pieces	081.02.192	360 pieces
90 x 17 mm	3 section	081.02.093	500 pieces	081.02.193	360 pieces
90 x 17 mm	4 section	081.02.094	500 pieces	081.02.194	360 pieces
120 x 17 mm	1 section	081.02.121	500 pieces	081.02.221	400 pieces



catalogue number	diameter	height	pack quantity
081.01.060	60 mm		18 pieces
081.01.080	80 mm	15 mm	18 pieces
081.01.100	100 mm	20 mm	18 pieces
081.01.120	120 mm	20 mm	18 pieces
081.01.150	150 mm	25 mm	18 pieces





Manufactured from optically clear, transparent polystyrene for determining bacterial contamination of surfaces such as the skin and all other surfaces. Also facilitates the counting of colonies.

➤ Featured with a moulded grid at the bottom which enables the identification of the detected contamination / cm<sup>2</sup>.

Aseptic petri dishes are manufactured in germ-free, class 10.000 sterile production areas with extreme sterility control.

> Sterile petri dishes are manufactured in germ-free, class 10.000 sterile production areas and then resterilized by gamma irradiation.

Sterile petri dishes are supplied with a certificate as a guarantee of "DNase, RNase & pyrogen free" product.

petri dishes clean room produced	diameter x height	pack quantity	box quantity
081.04.060	66 x 15 mm	10 pieces	500 pieces

petri dishes gamma diameter pack box sterilized x height quantity quantity 081.04.160 66x15mm 10 pieces 500 pieces

PETRI DISH BASKET - "st. steel"

## **COLONY COUNTER**




Ideal for fast and practical manual counting of colonies on any agar in petri dishes. The versatile unique design accepts petri dishes from 40 mm to 100 mm.

Intelligent counter with LED digitron display allows fast and precise count of the colonies between 0 - 999. Numericals on the counter can be adjusted backward and forward manually.

> Featured with a 90 mm high quality magnifier with 3x / 9x magnification power magnifier attached to a goose neck, flexible holder.

> Flexible holder enables both magnifying lens position and illumination angle adjustable in multiangular axes.

Counting table is featured with a backward LED illumination with variable light control. Circular LED illumination system offers a shadow and flicker free illumination.



Circular LED illumination system offers a shadow and flicker free illumination without heat development with optimal concentration of light.

1 square centimeter cross sectional template of the counting plate guarantees reliable counting.



Marking is done by a "felt pin pen" which is connected to the system by cable.

Intelligent counter with LED digitron display allows fast and precise count of the colonies between 0 - 999.

catalogue	for petri	external	pack
number	dishes	dimensions	quantity
603.11.001	40 - 100 mm dia.	210 x 255 x 160 mm	



Manufactured from high quality, chemical and corrosion resistant AISI 304 grade stainless steel.


 Ideal tool for transportation and autoclaving of petri dishes with maximum 100 mm diameter.

> Petri dish basket can carry maximum 10 petri dish.

catalogue number	pack quantity
081.20.001	1 piece



## **PETRI DISH STAND**

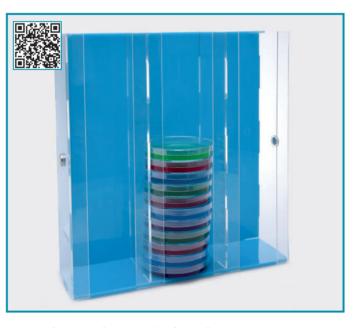

Manufactured from acrylic for safe storing, transportation of petri dishes. Also very useful during inoculation and incubation.

> Also provides steamline benchtop sample processing and protects petri dishes from dust, moisture and other environmental effects.

➤ Center divider provides space for labelling and incorporates buit in finger grip for easy handling. Can be linked to each other by the magnetic fixators at both sides.


catalogue number	for petri dish Ø	dish capacity	pack quantity
081.13.060	60 mm	30	1 piece
081.13.090	90 mm	60	1 piece





> Aseptic inoculation loops are manufactured from HIPS in germ-free, class 10.000 sterile production areas.

> Supplied with a certificate as a guarantee of "DNase, RNase & pyrogen free" product.

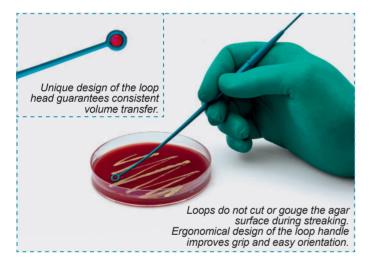

> Highly flexible body form enables comfortable and efficient planting and avoids streaking of cultures.

> Anti-static property of the raw material eliminates problems caused by electrostatic effects and guarantees consistent complete liquid transfer.

> Hexagonal loop shaft improves grip, assists orientation and makes diluting and streaking easy.

> Hexagonal loop handle also enables orientation of the loop head with a fixed angle.

> Ultra smooth loop surfaces allow easy streaking and offer problem-free planting without the risk of cutting or gauging the agar surface.

> Double use loops have one side a fine tip specially designed for holding, transporting and counting colonies. The loop at the other for streaking in petri dishes.

Color coded loops enable fast, easy and practical identification of loop type.

catalogue number	loops specification	loop color	pack quantity	box quantity
082.01.001	one end needle / one end 1 $\mu$ l	light blue	10 pieces	1000 pieces
082.01.002	one end needle / one end 10 µl	blue	10 pieces	1000 pieces
082.01.003	one end 1 $\mu$ l/one end 10 $\mu$ l	dark blue	10 pieces	1000 pieces

## **INOCULATING TURNTABLE**

> Light weight but robust body manufactured from aluminium and featured with non-skid feet.

> Manually operated turntable guarantees smooth and easy rotation on both directions. Also enables easy and fast allocation of bacteria across petri dish surface.

> Double sided construction accomodates petri dishes from 60 to 150 mm diameter by inverting the turntable.


Ball bearings provide a smooth and effortless spinning ensuring rapid inoculation steps and extended operation life.

The silicone pad holds the petri dishes firmly and keeps the dish allways in center position during inoculation steps.

The non-skid pad can easily be removed for fast and efficient cleaning.

catalogue	pack
number	quantity
081.10.001	1 piece



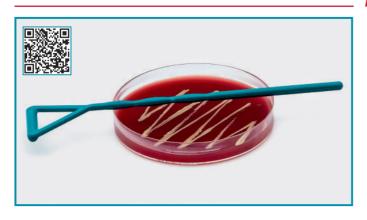

## CELL SPREADER - "HIPS" - "sterile"

> Aseptic cell spreader is manufactured from HIPS in germfree, class 10.000 sterile production areas.

Supplied with a certificate as a guarantee of "DNase, RNase & pyrogen free" product.

> Ultra smooth, edgeless designed, triangular spreading head allows easy and problem-free spreading without the risk of cutting or gauging the agar surface.

> Highly flexible body form enables comfortable and efficient spreading and avoids streaking of cultures.

 Rippled designed ergonomic handle improves gripping efficiency and assists easy orientation of the spreader head.

> Handle flexes slightly under pressure allowing the triangular head for perfect, evenly distributed and uniform pressure on the agar surface.

Individually single packed with lot number, production date and expiry date printed on the package.



Handle flexes slightly under pressure allowing the triangular head for perfect, evenly distributed and uniform pressure on the agar surface.

catalogue pack box number quantity quantity 082.03.001 1 piece 100 pieces



# life sciences & microscopy & microbiology



## **INOCULATION LOOP HANDLE**

> The loop shaft is manufactured from nickel plated brass.

> The shaft of the loop handle is insulated by PVC for further protection of user against heat.

> Featured with a screw fastening end for tight fastening of the loops used.

> Handle guarantees easy holding option and fatigue-free application.





## **INOCULATION LOOP - "stainless steel"**

> These durable loops are manufactured from nickel-chrome metal wire with twisted wire strands.

Highly flexible body form enables comfortable and efficient planting and avoids streaking of cultures.

> Ultra smooth loop surfaces allow easy streaking and offer problem-free planting without the risk of cutting or gauging the agar surface.

Can be heated up to 1200°C and can be cooled rapidly after heat sterilisation.

catalogue number	loweth	pack
numper	lengun	quantity
082.02.001	50 mm	10 pieces

## CELL SPREADER - "stainless steel"

Manufactured AISI 304 grade stainless steel. Suitable for sterilization by autoclaving or by direct flame.

Smooth, rounded surfaces prevents any cutting or gouging of agar surface during application.

> Triangular formed spreader head enables even spreading of liquid samples all over the surface.

catalogue	triangular	handle	pack
number	bar width	length	quantity
082.03.003	32 mm	190 mm	



## CELL LIFTER - "for cell culture" - "sterile"

Manufactured from polypropylene and specially designed for scraping of attached cells on culture dishes or plate surfaces. Ideal for manual harvesting of cells.

> Manufactured in germ-free, class 10.000 sterile production areas and then resterilised by gamma irradiation.

 Supplied with a certificate of "DNase, RNase & pyrogen free" product.

► Featured with two flat ends with different widths on a single handle.

> Two blades with different widths offer practical and easy solutions during sample scraping and collection.

Specially the wide blade end offers ideal solutions for dish and 6 well plates.

Flat ends have 35 degree sharp edges for easy removal of the residues on flat surfaces.

Individually single packed with lot number, production date and expiry date printed on the package.

Two blades with different widths offer practical and easy solutions

Flat ends have 35 degree sharp edges for easy removal of the residues on flat surfaces

catalogue	total	narrow	large	packing	pack
number	length	end width	end width	specification	quantity
121.01.001	245 mm	12 mm	23 mm	single pack	100 pieces



## CELL SCRAPERS - "for cell culture" - "sterile"

Specially designed to facilitate collection of attached cells on culture dishes.

Manufactured in germ-free, class 10.000 sterile production areas and then resterilised by gamma irradiation.

> Supplied with a certificate as a guarantee of "DNase, RNase & pyrogen free" product.

> Handle is manufactured from ABS. Scraper head is manufactured from flexible polyethylene.

 Scraper blade rotates around the it's axis enabling easy and flexible applications. > The rotating blade also guarantees the efficient collection of cells from any angle.

Ultra smooth blade surfaces offer problem-free collection without the risk of cutting or gauging the agar surface.

 Hexagonal shaft improves grip, assists orientation and makes diluting and streaking easy.

> Hexagonal handle also enables orientation of the loop head with a fixed angle.

Individually single packed with lot number, production date and expiry date printed on the package.



Rotating scraper blade offers easy and flexible applications and enables the collection of cells from any angle.

catalogue number	total length	box quantity
121.11.023	230 mm	150 pieces
121.12.030	300 mm	150 pieces

# 0 2 in 2/10 HD 25ml 2 10 5 24 23 9 5 8 20 98 8 <u>6</u>e 50 6 1 9

# life sciences & microscopy & microbiology

## PIPETTES - "serological" - "polystyrene"

> Manufactured from virgin polystyrene with excellent optical transparency.

> Sterilized with gamma irradiation. Free of RNase, DNase, DNA and pyrogene.

> Unique design offers a smooth interior which prevents cell-hanging and clumping inside the pipette wall.

Stable and break-resistant pipette tip offers constant the reproducible flow in each time.

 Optimised mouthpiece perfectly fits to all types of pipette pumps and balls.

> Filter plug at the mouthpiece prevents overflow of liquid and also eliminates contamination.

Color coded ring mark at suction stem allows fast identification and sourcing.

► The sharp, black, highly visible permanent graduations prevent ambiguity and guarantee precise reading and accurate dispensing.

Reverse graduations show actual removed or remaining volumes on all pipettes larger than 1 ml volume.

> Pipettes are supplied individually wrapped in fiber-free color coded paper as easy-to-open packing.

Ta		
		4
		11
		BROLES

Volume identification by color coding on pipette enables easy volume identification during working.



Filter plug at the mouthpiece of the pipette prevents exterior effects and minimize contamination.



Accurate volume identification by highly visible bidirectional graduation printed on pipette side body.

Ascending and descending scales facilitate reading both dispensing and remaining volume.

catalogue number	pipette volume	color code	box quantity
083.13.001	1 ml	yellow	500 pieces
083.13.002	2 ml	green	500 pieces
083.13.005	5 ml	blue	200 pieces
083.13.010	10 ml	orange	200 pieces
083.13.025	25 ml	red	150 pieces
083.13.050	50 ml	purple	100 pieces
083.13.100	100 ml	pink	50 pieces

## RACK - "for pipettes"

Manufactured from acrylic for easy organisation of all kind of pipettes.

➤ 4 shelves guarantee easy and fast reach of all pipettes between 1 ml to 50 ml size within arm's reach.

> Angled design of the pipette shelves prevents the risk of pipettes falling out even the shelf is fully filled.

Other technical specifications can be seen at catalogue page no 15.





STAINING JARS "Schifferdecker"

 Manufactured from heavy walled soda glass for holding microscope slides horizontally.

> Supplied together with a glass lid.

➤ Offers space for 10 individual microscope slides or 10 pairs of slides adjacently back-to- back.

catalogue number	dimensions	pack quantity
073.03.001	87x74x40 mm	1 piece



## STAINING JARS "Hellendahl"

> Manufactured from heavy walled soda glass for holding microscope slides vertically.

> Supplied together with a glass lid.

Offers space for 8 individual microscope slides or 8 pairs of slides adjacently backto- back.

catalogue<br/>numberpack<br/>dimensionspack<br/>quantity073.01.00160x60x105 mm1 piece



STAINING JAR "Macro"

Manufactured from heavy walled soda glass for using with a stainless steel slide holding rack.

> Supplied with a lid that provides safe closure of the jar content during non-use.

Stainless steel staining rack is not supplied together with the jar.

catalogue number	dimensions	pack quantity
073.05.001	105x90x75 mm	1 piece



## **TISSUE BASE MOULDS**

 Manufactured from stainless steel for easy removal of paraffin inclusions. > They enable easy and precise positioning of the specimens during application.

6 mm biopsy & hystology 5 pieces
x 6 mm biopsy & hystology 5 pieces
x 6 mm standard 5 pieces



## **STAINING JAR RACK**

 Manufactured from stainless steel to hold and carry microscope slides.

 Featured with inserts that can hold 20 single slides in horizontal position.

> Long handle offers easy and safe hold.

catalogue number	dimensions	pack quantity
073.06.001	85x70x20 mm	1 piece

## **EMBEDDING CASSETTES - "without lid"**

 Manufactured from POM which is fully resistant to histological solvents.

> The unique design allows perfect fit to all microtome chuck adapters.

Slanted marking area on front side enables easy marking and labelling.

casette without lid	color	pack quantity	box quantity
074.01.001	white	500 pieces	5000 pieces
074.01.002	yellow	500 pieces	5000 pieces
074.01.003	green	500 pieces	5000 pieces
074.01.004	pink	500 pieces	5000 pieces
074.01.005	blue	500 pieces	5000 pieces

## CASSETTE LID

Manufactured from high quality, chemical and corrosion resistant AISI 304 grade stainless steel.

> Perforated surface offers the optimal liquid diffusion.

> The body form fits perfectly to the casettes and guarantees tight closure.

catalogue	pack
number	quantity
074.02.001	5 pieces

## EMBEDDING CASSETTES - "with lid"

> Manufactured from POM which is fully resistant to histological solvents.

 Histology casettes with rectangular openings
 Alternative 2 cassettes:

 Biopsy casettes with square openings

> The unique design allows perfect fit to all microtome chuck adapters.

> The efficient flow-through slots maximize the liquid exchange and also ensure proper drainage.

> The unique design of the lids can be opened and closed as often as necessary without getting loose.

> Lids allways relock securely without any risk of specimen loss.

Slanted marking area with 45° angled on front side enables easy marking and labelling.


► Histology casettes with rectangular openings provide maximum liquid exchange and does not require use of a pad.


> Biopsy casettes with aquare openings provide maximum liquid exchange and does not require use of a pad.

casette hystology	casette biopsy	color	pack quantity	box quantity
074.03.001	074.04.001	white	500 pieces	5000 pieces
074.03.002	074.04.002	yellow	500 pieces	5000 pieces
074.03.003	074.04.003	green	500 pieces	5000 pieces
074.03.004	074.04.004	pink	500 pieces	5000 pieces
074.03.005	074.04.005	blue	500 pieces	5000 pieces

# life sciences & microscopy & microbiology



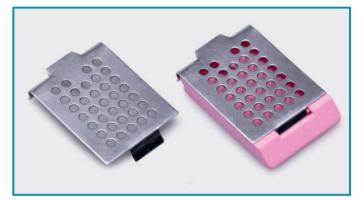

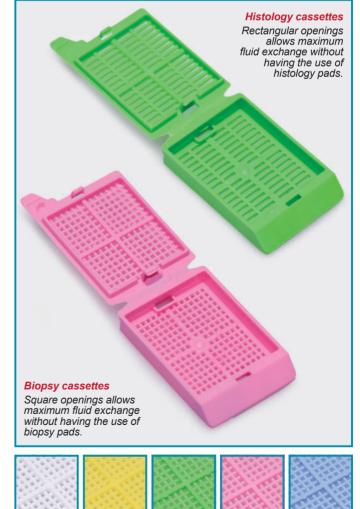



## **MICRO - HAEMATOCRIT** TUBES

 Manufactured by fully automatic machines according to ISO 12772 and BS 4316-68 standards with 75 mm length and 0,2 mm wall thickness.


> Alternative 2 tube types:

Non-heparinised tubes with blue color tip.

Heparinised tubes with red color tip.

> Interior surface of heparinised tubes are covered with sodium heparinite.

catalogue number vial box quantity quantity tube type 088.02.001 heparinised 100 pcs 10 vials 088.02.002 non-heparinised 100 pcs 10 vials



## **MICRO - HAEMATOCRIT TUBE WAX**

Offers fast and safe solutions for sealing of the micro haematocrit tube ends.

Can carry 48 tubes with 2 x 24 array.

Numerical index on the tray provides easy identification of tube positions

> This non drying sealing compound has a life time of 3 years at room conditions.

incisive and have very sharp edges which penetrates into the skin very easily.	Ÿ.
2000 Bit Sterifie Bit	utianzeiten bod Lanceis
C	- Far the

Lancets are very

## **BLOOD LANCETS** "manual"

Manufactured from medical grade > stainless steel.

 Featured with very sharp blade end that penetrates into the skin easily without pain.

> Single use and gamma sterilized and individually packed.

catalogue	pack	box
number	quantity	quantity
088.01.001	200 pieces	50 pack

catalogue	tube	pack
number	capacity	quantity
088.03.001	48 tubes	

## **BLOOD LANCETS - "automatic"**

> Offers perfect protection since the needle is allways been fully shielded "before" and "after" use.

> Featured with ultra sharp needle with high speed penetration of 1,8 mm depth.

> Single use and gamma and individually sterilized packed.







Twist off the protective safety cap first.



Hold the lancet firmly on the finger site



Press the release button to activate the lancet



Gently press the finger to let the blood drop out

Α	D	A	P	TE	R	S

ADAPTERS	
2 necks	84
2 necks - 45°	84
2 necks - 75°	84
3 necks	84-8
bend	83
bend - 75°	84
bend - 90°	84
bend- with stopcock	84
delivery	85-8
distilling heads	85
expansion	82
PTFE	87
receiving	88
reduction	82
splash heads	85
straight	83
straight - with stopcock	83
tube - micro	184
with screw cap	82
with screw thread	82
	83
with stopcock	03
Aluminium disc	72
Aluminium foil	72
Aluminium foil dispenser	72
Aquadur test strips	149
Arsenic estimator	90
Arsenic estimator	30
AUTOCLAVES	
indicator roll	119
vertical	119
Vertical	
BAGS	
autoclavable	78
bag latches	79-8
homogenization	80
homogenization - stand	80
locks	79
stand	78
with wire closure	79
zip lock	79
BALANCES	
	150
0.0001 g precision	150
0.001 g presicion	150-1:
0.01 g precision	
0.1 g precision	151
BASKETS	
basket for bottles	42
carrier for bottles	42 42
	42 203
petri dish	203
Beads - glass	87
BEAKERS	
glass	26
polypropylene	20 26
PTFE	20 26
stainless steel with handle	26 27
with handle	27
Blood counting chambers	198
Blood lancets	210

DUSSNEADS	
for stirrers	160-161
heavy duty	51
standard	51
swivel	51
30000	51
BOTTLES	
aluminium	33
aspirator	40
dropping	41
filter	106
ISO - coated glass	30
	30 31
ISO - polypropylene	
polyethylene- for liquids	34
polyethylene- for powders	35
security seal cutter	32
spraying	38
square	32
wash	38-39
water sampling	36
wide neck	33
burette	12
gas wash	89
C .	
BOXES	
click lock	43
cryo - cardboard	189
cryo - polycarbonate	189
cryo - polypropylene	188
dispenser	13-43
double opening	43
for nitrile gloves	133
safety	123
slide	200
transport	42
tube - cardboard	182
vial	175
with compartments	42
BRUSHES	
burette	117
dish washing	122
intensive cleaning	122
laboratory	116-117
BUCKETS	123
Bookere	120
BUNSEN BURNERS	
advanced	61
hose	61
meker	61
stabilizer	61
standard	61
Standard	01
BURETTES	
bottles	12
automatic	11
bellow	12
digital - manuel	12
schilling	18
	12
straight	

Burette clamps Büchner funnels	12 104
Caps	104 134
Carboys	40
Carrier for bottles	42
Cell counters	 198
	100
CELL CULTURES	
cap - aluminium	29
cell lifter	206
cell scraper	206
cell sparaders	205
erlenmeyer	29
erlenmeyer - baffed	29
flasks	192
inaculation loop - steel	205
inoculation loop handle	205 204
inoculation loops - HIPS	204 204
inoculation turn table multiwell plate	204 193
petri dish	193 193
peinuisn	195
Cell sparaders	205
CENTRIFUGE	
clinical	114
mini	114 112
mini - high speed	112
nini nigri speca	110
	80-181-18
Ceramic triangle	49
Chemical pads	135
Chromatography columns	94
CLAMPS	
2 jaws	50
3 jaws	50
burette	12
click lock	67
for frame work	50
hoffman	67
for KS joints	98
for vacuum filter set	160
thermometer	51
tube	52
worm drive screw	67
Cleaning towel dispenser	122
Cleaning towels	122
CLIPS	
for NS joints	91
Colony counter	203
Columns for chromatography	94
CONDENSERS	
allihn	92
allihn - for soxhlet	94
dimroth	
	93
dimroth - for soxhlet	93 95
dimroth - for soxhlet liebig	

Conductivity solution Containers	146 37
Cover glass forcep	58
Cover glasses	199
Cover glasses - blood counting	
Crimpers	174
CRUCIBLES	•
alsint	65
gooch	105
lids	65 65
porcelain stainless steel	65 64
Crucible tongs	52
CRYO	
box - cardboard	189
box - polycarbonate	189
box - polypropylene	188
cryo cap inserts	185
Cryo tube canes	185
tube work station	185 188
CRYSTALLIZATION DISHES	
glass	64
stainless steel	64
Cumbostion boat	64
Cutters	59
Cutting tool for tapes	74
CUVETTES	4
boxes	177 470 47
	176-177 176
polystyrene quartz	176-177
Cylinders	10
Cylinders Decappers	10 174
Cylinders Decappers Density bottles	
Decappers	174
Decappers Density bottles Desiccators Desiccant beads	174 154
Decappers Density bottles Desiccators	174 154 62
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS	174 154 62 62 135
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced	174 154 62 62 135
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS	174 154 62 62 135
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced repetetive tips Dispenser boxes	174 154 62 135 19 18
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced repetetive tips Dispenser boxes Dissecting needle set	174 154 62 135 19 18 18 13-43 60
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced repetetive tips Dispenser boxes Dissecting needle set Distilling heads	174 154 62 135 19 18 18 13-43 60 85
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced repetetive tips Dispenser boxes Dissecting needle set Distilling heads Distilling links	174 154 62 135 19 18 13-43 60 85 86-87
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced repetetive tips Dispenser boxes Dissecting needle set Distilling heads Distilling links DO electrolyte solution	174 154 62 135 19 18 13-43 60 85 86-87 146
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced repetetive tips Dispenser boxes Dissecting needle set Distilling heads Distilling links DO electrolyte solution DO probe	174 154 62 135 19 18 13-43 60 85 86-87 146 146
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced repetetive tips Dispenser boxes Dissecting needle set Distilling heads Distilling links DO electrolyte solution DO probe Draining racks	174 154 62 135 19 18 13-43 60 85 86-87 146 146 118
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced repetetive tips Dispenser boxes Dissecting needle set Distilling heads Distilling links DO electrolyte solution DO probe Draining racks Dropping bottles	174 154 62 135 19 18 13-43 60 85 86-87 146 146 146 118 41
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced repetetive tips Dispenser boxes Dissecting needle set Distilling heads Distilling heads Distilling links DO electrolyte solution DO probe Draining racks Dropping bottles Dropping funnels	174 154 62 135 19 18 13-43 60 85 86-87 146 146 146 118 41 111
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced repetetive tips Dispenser boxes Dissecting needle set Distilling heads Distilling links DO electrolyte solution DO probe Draining racks Dropping bottles Dropping funnels Drying tubes	174 154 62 135 19 18 13-43 60 85 86-87 146 146 118 41 111 89
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced repetetive tips Dispenser boxes Dissecting needle set Distilling heads Distilling links DO electrolyte solution DO probe Draining racks Dropping bottles Dropping funnels Drying tubes Ear muff	174 154 62 135 19 18 13-43 60 85 86-87 146 146 146 146 118 41 111 89 126
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced repetetive tips Dispenser boxes Dissecting needle set Distilling heads Distilling links DO electrolyte solution DO probe Draining racks Dropping bottles Dropping funnels Drying tubes	174 154 62 135 19 18 13-43 60 85 86-87 146 146 118 41 111 89
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced repetetive tips Dispenser boxes Dissecting needle set Distilling heads Distilling links DO electrolyte solution DO probe Draining racks Dropping bottles Dropping funnels Drying tubes Ear muff Ear plugs ELECTRODES	174 154 62 135 19 18 13-43 60 85 86-87 146 146 118 41 111 89 126 126
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced repetetive tips Dispenser boxes Dissecting needle set Distilling heads Distilling links DO electrolyte solution DO probe Draining racks Dropping bottles Dropping funnels Dryping tubes Ear muff Ear plugs ELECTRODES conductivity	174 154 62 135 19 18 13-43 60 85 86-87 146 146 118 41 111 89 126 126 146
Decappers Density bottles Desiccators Desiccant beads Desk Protectors DISPENSERS advanced repetetive tips Dispenser boxes Dissecting needle set Distilling heads Distilling links DO electrolyte solution DO probe Draining racks Dropping bottles Dropping funnels Drying tubes Ear muff Ear plugs ELECTRODES	174 154 62 135 19 18 13-43 60 85 86-87 146 146 118 41 111 89 126 126

Embedding cassettes	209
ERLENMEYERS	
cell culture	29
cell culture - baffed	29
glass	28
glass - ground neck	96
screw cap	28
	20
Estimator - arsenic	90
Estimator - water	90
Evaporating Dishes	64
Evaporating dish tong Extractor thimbles	52
Extractor thimbles	95
Extractors - soxhlet	95
Eye wash bottle stand	129
Eye wash bottles	128-129
FILMS	
parafilm	70
parafilm dispenser	71
stretch	70
SITEICH	70
FILTER	
membrane	167
Filter flasks	104
Filter flasks for vacuum system	
Filler Hasks for vacuum system Filter noner foreen	
Filter paper forcep Filter papers	108
Fliter papers	108
Finger protectors	133
FLASKS	
2 ground neck	97
3 ground neck	97
amber - ground neck	96
cell culture	192
evaporating	98
filter	104
flat bottom	27
flat bottom - ground neck	97
kjehldahl	98
nitrogen	99
pear shape	98
receiving	98
round bottom	90 27
round bottom - ground neck	97
volumetric	8-9
Flask stands	99
Flow indicator	109
FORCEPS	
ABS	58
cover glasses	58
dissecting	58
filter paper	108
	58
general use	30

<i>PONNELS</i> analytical büchner dropping glass - plain glass - powder gooch holders polypropylene - plain polypropylene - powder polypropylene - ribbed separating	102 104 111 102 102 105 103 102 102 102 102
Gas wash bottle heads Gas wash bottles Gaskets GHS pictograms Glass beads	89 89 105 74 87
GLOVES box cold protection finger protectors heat protection neopren nitrile nitrile - chemical protection safe handling silicone thermal resistance	133 131 133 131 132 130 132 131 133 132
Goggle Gooch crucible Gooch funnel Grease Ground joints Heating Mantles	124 105 105 91 82 163
HOMOGENIZERS clamp - for heavy duty homogenizer clamp - for light duty homogenizer heavy duty light duty rotor set	161 161 161 161 161
Homogenization bag latches Homogenization bag stands Homogenization bags Hose for bunsen burner Imhoff cones stands Imhoff cones Incinerating dishes Inoculation loop - steel Inoculation loop handle Inoculation loops - HIPS Inoculation turn table	80 80 61 154 154 65 205 205 204 204
JARS glass polypropylene Staining jar rack staining jars	37 37 208 208

Jerrycans Joint grease	40 91
Joint sleeves Knives	91 59
LABELS	
circular form	76
rectangular form	75-77
safety	74
Label dispenser	76
Label remover	76
Labelling tapes Laboratory jack	75 49
Laboratory Jack	49
LABORATORY STANDS	
ABS	49
horse shoe	48
rectangular support rods	48 48
triangle	40 48
tripod	49
Laboratory tissue	122
LED light source	126 127
Lens cleaning tissue Lithmus paper	127
Liumus paper	140
MAGNETIC STIRRERS	
with hot plate	156
w/o hot plate	157
Magnetic stirring bars	158
Magnifier	194
Manifolds	106
Masks	136
MECHANICAL STIRRERS	
light duty	160
mechanical - heavy duty	160
Mechanical stirrer shafts	160
Membrane filters	167
METERS	144-145
MICROPIPETTES	
8 channel	21
single channel	20-21
stands	24
MICROSCOPES	
biological	196
Image projector	196
stereo	197
Microscope smart tablet	197
MIXERS	
vortex	164

Micro naematocrit tubes	210
Micropipette pipetting reservoirs	20
Micropipette tips	22-23
Mortars	63
Multiwell plates	193
Non-return valve	109
Over shoes	134
Parafilm	70
Parafilm dispenser	71
PCR	
	404
plates	191
sealing film	191 191
sealing tape	
strips tubes	190 190
work station	191
Pehanon test strips	148
PEN	
double tip	73
engraving	73
single tip	73
Pestles	63
PETRI DISH	
basket	203
cell culture	193
glass	202
polystyrene	202
rodac	202
stands	203
Petri dish sealing tape	74
pH - portable	144
pH - table top	145
pH buffer solutions	147
pH indicator strips	148
pH paper roll	148
	140
PIPETTES	
graduated	14
pasteuer - glass	13
pasteur - polyethylene	13
pasteur pipette bulb	13
serological	207
volumetric	14
Pipette boxes	15
Pipette bulb	16
Pipette fillers	16
Pipette pump - electrical	17
Pipette rack	15
Pipette tray	15
Pipette stands	14-15
Protective suits	134
PUMPS	
vacuum & pressure	109
water jet	109

Qualitative filter papers Quantitative filter papers	108 108
Quantofix test strips	149
Refractometers	149 195
Rotary evaporator spare parts	
Rotary evaporators	101
Safety box tray	123
Safety boxes	123
Safety shield	126
	120
SCALPELS	
blades	60
handles	60
with safety cover	60
SCISSORS	
disecting	59
for hose cutting	66
general use	59
heavy duty	59
SCOOPS	
self standing - polypropyle	54
self standing - polystyrene	55
stainless steel	56
Screw caps	69
Sealing tape - PTFE	91
Security seal	32
Separating funnels	110
Silica-Gel	62
Sleeves	91
SLIDES	
box cabinet	200
boxes	200
mailers	201
wallet rack	201
wallets - cardboard	201
slides	199
Soaking solution	146
Soxhlet extractors	95
SPATULAS	50
chattaway	53 53
curved end double end	53 53
flat knife	53
macro spoon	53
macro spoon - polypropylene	57
micro spoon	53
poly	53
round grooved	53
with lid	57
Spoctaclo cabinot	127
Spectacle cabinet Spectacles	124-125
Spectrophotometer cuvettes	176-177
-opectrophotometer cuvelles	110-117
SPOONS	FC
polystyrene	56 56
stainless steel	56
Stabilising rings	28
Staining jar rack	208
Staining jaka	200

STANDS	
eye wash bottle	129
imhoff cone	154
petri dish	203
laboratory	48-49
thermometer	138
STIRRERS	
magnetic - w/o hot plate	157
magnetic - with hot plate	156
mechanical - heavy duty	160
mechanical - light duty	160
Stirrer shafts	160
Stirring rods	159
STOPPERS	
cellulose	68
cork	68
flange	69
glass	69
polypropylene	69
rubber	68
rubber - drilled	69
silicone	68
turn over flange	68
Stopwatches	142
otophatenes	172
SYRINGES	
glass	169
polypropylene	166
serie H	169
serie H - removable needle	169
serie RN - removable needle	168
serie T	168
Syringe Filters	166
TAPES	
cutting tool	74
for labelling	75
sealing - petri	74
sealing - PTFE	91
Tape dispenser	75
Temperature probe	146
Test indicator - steam sterilizatio	n 119
TEST STRIPS	
aquadur	149
pehanon	148
peroxide	149
pH indicator strips	148
pH paper roll	148
water hardness	149
	143
Thermohygrometer	140
Thermohygrometer - portable	
THERMOMETERS	
desk top	140-141
glass	138
max-min - humidity	141
portable	139

Thermometer Thermometer adapter Thermometer clamp Thimbles	138 82 138 95
TIMERS electronic	143
mechanical	142
Tissue Tissue base moulds	122 208
TLC separation tank	178
spray kit sprayer	178 178 178
Tongs	52
Towel dispenser	122
Towels Transport box	122 42
TRAYS	
pipette	15
polypropylene	123
stainless steel	123
TUBES	
PCR strips	190
qPCR strips	190
centrifuge - glass	44
centrifuge - screw cap	180
centrifuge - screw cap -	
self standing	181
cryo <sub>.</sub>	185
cryo cap insert	185
drying	89
micro	184 44
test - glass test - polypropylene	44 44
test - polystyrene	44 44
tube adapter - micro	44 184
	104
TUBE BOXES cardboard	182
cryo	188-18
Tube clamps	52
TUBE RACKS	
4 sides	46
dismantled	46
epoxy coated steel	45
foldable	47-183
hedgehod design	182
micro tube - 3 tier micro tube - base support	187 186
micro tube - double side	180
micro tube - foldable	186
PCR tube	100 191
push&hold	181
snapable	183
stainless steel	45
with silicone grips	45

TUBINGS	
clamps - click lock	67
clamps - hoffmann clamps - worm drive screw	67 67
PTFE	66
rubber - standard	66
rubber - vacuum	66
scissor silicone	66 66
Silicone	66
Tubing connectors Ultrasonic cleaners	67 121
Ultrasullic cleaners	121
VACUUM	407
filter set flask	107 107
manifolds	107
pumps	109
support base	107
Vacuum filter set	107
Valve	109
VIALS	
box	175
crimper & decapper	174
N11 - crimp cap N11 caps& septas	172 172
N11 caps& septas N13 - screw cap	172
N15 - screw cap	172
N15 caps& septas	172
N20 - crimp cap	173
N20 caps& septas N24 - screw cap	173 174
N8 - screw cap	171
N8 caps& septas	171
N8 insert	171
N9 - screw cap N9 - screw cap with insert	171 171
N9 - screw cap with insert	171
racks	175
Visitor gowns	134
VOLUMETRIC FLASKS	
qlass	8
glass - coated	8
polypropylene	9
trapezoidal	9
Wash bottles	38-39
Watch glasses	153
Water estimator Water hardness test strips	90 149
water naroness test strips	149
WATER STILLS	100
automatic basic	100 100
filter	100
MEICHING	
WEIGHING brush	153
dishes - square form	152
dishes - aluminium	152
dishes - diamond form	152
papers scoops	153 153
	100
Wire gauze	48

>

catalogue no // page	catalogue no // page	catalogue no // page	catalogue no // page	catalogue no // page	catalogue no // page
005.01.001 → 23	011.20.100 → 21	014.01.100 → 8	019.01.025 → 11	025.01.400 → 26	028.01.052 → 96
$005.01.002 \rightarrow 23$	$011.20.200 \rightarrow 21$	$014.01.100C \rightarrow 8$	$019.01.050 \rightarrow 11$	$025.01.600 \rightarrow 26$	$028.01.053 \rightarrow 96$
005.01.003 <b>→</b> 23	011.20.901 → 21	014.01.101 → 8	019.05.010 → 11	025.01.800 → 26	028.01.100 <b>→</b> 96
005.01.004 <b>→</b> 23	011.20.905 → 21	014.01.101C → 8	019.05.025 → 11	025.01.901 → 26	028.01.101 → 96
$005.01.005 \longrightarrow 23$	$011.20.910 \longrightarrow 21$	$014.01.200 \rightarrow 8$	$019.05.050 \longrightarrow 11$	$025.01.902 \longrightarrow 26$	$028.01.102 \rightarrow 96$
$005.01.015 \longrightarrow 23$	$\begin{array}{c} 011.21.010 \longrightarrow 21 \\ 011.21.050 \longrightarrow 21 \end{array}$	$\begin{array}{ccc} 014.01.200C \longrightarrow 8\\ 014.01.250 \longrightarrow 8 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$028.01.103 \longrightarrow 96$
$\begin{array}{ccc} 006.03.030 \longrightarrow 20\\ 006.03.055 \longrightarrow 20 \end{array}$	$011.21.200 \longrightarrow 21$	$\begin{array}{cccc} 014.01.250 \longrightarrow 8 \\ 014.01.250C \longrightarrow 8 \end{array}$	$020.03.025 \longrightarrow 12$ $020.03.050 \longrightarrow 12$	$\begin{array}{c} 025.07.970 \longrightarrow 20\\ 025.03.050 \longrightarrow 26 \end{array}$	$\begin{array}{ccc} 028.01.250 \longrightarrow 96 \\ 028.01.251 \longrightarrow 96 \end{array}$
$006.03.110 \rightarrow 20$	$011.21.300 \longrightarrow 21$	$014.01.500 \longrightarrow 8$	$020.05.010 \rightarrow 12$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$028.01.252 \longrightarrow 96$
006.05.001 → 24	013.01.005 → 8	014.01.500C → 8	020.05.025 → 12	025.03.250 → 26	028.01.300 → 96
006.11.005 <b>→</b> 24	013.01.005C → 8	014.01.901 → 8	020.05.050 <b>→</b> 12	025.03.500 → 26	028.01.500 <b>→</b> 96
006.11.006 → 24	$013.01.010 \rightarrow 8$	$014.01.901C \rightarrow 8$	$020.07.010 \rightarrow 12$	025.03.901 → 26	$028.01.501 \rightarrow 96$
$006.12.004 \longrightarrow 24$	$\begin{array}{ccc} 013.01.010C \longrightarrow 8\\ 013.01.020 \longrightarrow 8 \end{array}$	$\begin{array}{ccc} 014.01.902 \longrightarrow 8\\ 014.01.902C \longrightarrow 8 \end{array}$	$020.07.025 \longrightarrow 12$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$028.01.502 \rightarrow 96$
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{ccc} 013.01.020 \longrightarrow 8 \\ 013.01.020C \longrightarrow 8 \end{array}$	$\begin{array}{ccc} 014.01.902C \longrightarrow 8\\ 014.03.025 \longrightarrow 9 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{ccc} 028.01.901 \longrightarrow 96 \\ 028.01.902 \longrightarrow 96 \end{array}$
$006.13.055 \longrightarrow 20$	$013.01.025 \rightarrow 8$	$014.03.050 \rightarrow 9$	$021.01.002 \rightarrow 14$	$025.04.901 \rightarrow 26$	$028.03.050 \rightarrow 28$
006.13.110 → 20	013.01.025C → 8	014.03.100 → 9	021.01.005 <b>→</b> 14	025.05.500 → 27	028.03.100 → 28
006.15.001 <b>→</b> 43	$013.01.026 \rightarrow 8$	$014.03.250 \rightarrow 9$	021.01.010 → 14	025.05.901 → 27	028.03.250 → 28
$006.15.002 \longrightarrow 43$	$013.01.026C \longrightarrow 8$	$014.03.500 \rightarrow 9$	$021.01.020 \rightarrow 14$	$025.05.902 \longrightarrow 27$	$028.03.500 \longrightarrow 28$
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccc} 013.01.050 \longrightarrow 8\\ 013.01.050C \longrightarrow 8 \end{array}$	$\begin{array}{ccc} 014.03.901 \longrightarrow & 9 \\ 014.13.025 \longrightarrow & 9 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
$007.07.002 \longrightarrow 18$ $008.06.001 \longrightarrow 18$	$013.01.050 \longrightarrow 8$	$014.13.050 \longrightarrow 9$	$021.05.001 \longrightarrow 14$	$026.01.100 \longrightarrow 26$	$028.11.103 \longrightarrow 96$ $028.11.103 \longrightarrow 96$
008.06.002 → 18	$013.01.051C \longrightarrow 8$	$014.13.100 \rightarrow 9$	$021.05.002 \rightarrow 14$	$026.01.250 \rightarrow 26$	028.11.252 → 96
008.06.005 <b>→</b> 18	013.01.100 → 8	014.13.250 → 9	021.05.003 <b>→</b> 14	026.01.500 → 26	028.11.502 <b>→</b> 96
008.06.012 → 18	$013.01.100C \longrightarrow 8$	$014.13.500 \longrightarrow 9$	021.05.004 → 14	026.01.901 → 26	028.11.901 → 96
$008.06.025 \longrightarrow 18$	$013.01.101 \longrightarrow 8$	$014.13.901 \longrightarrow 9$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$026.01.902 \longrightarrow 26$	$028.11.902 \longrightarrow 96$
$\begin{array}{ccc} 008.06.050 \longrightarrow 18\\ 008.06.125 \longrightarrow 18 \end{array}$	$\begin{array}{ccc} 013.01.101C \longrightarrow 8\\ 013.01.150 \longrightarrow 8 \end{array}$	$\begin{array}{ccc} 015.01.005 \longrightarrow 10\\ 015.01.010 \longrightarrow 10 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
$008.06.250 \rightarrow 18$	$013.01.150C \longrightarrow 8$	$015.01.025 \longrightarrow 10$	$021.05.015 \longrightarrow 14$	$026.02.901 \longrightarrow 27$	$029.01.250 \longrightarrow 27$
008.06.500 → 18	013.01.200 → 8	015.01.050 → 10	021.05.020 → 14	026.02.902 → 27	029.01.500 → 27
008.12.002 → 19	$013.01.200C \longrightarrow 8$	015.01.100 → 10	021.05.025 → 14	026.02.903 → 27	029.01.901 → 27
$008.12.005 \longrightarrow 19$	$013.01.250 \longrightarrow 8$	$015.01.250 \rightarrow 10$	$021.05.050 \longrightarrow 14$	$\begin{array}{c} 026.03.001 \longrightarrow 52 \\ 026.02.002 \longrightarrow 52 \\ \end{array}$	$029.01.902 \rightarrow 27$
$\begin{array}{ccc} 008.12.010 \longrightarrow 19 \\ 008.12.030 \longrightarrow 19 \end{array}$	$\begin{array}{ccc} 013.01.250C \longrightarrow 8\\ 013.01.300 \longrightarrow 8 \end{array}$	$\begin{array}{ccc} 015.01.500 \longrightarrow 10\\ 015.01.901 \longrightarrow 10 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
$008.12.060 \longrightarrow 19$	$013.01.300C \longrightarrow 8$	$015.01.902 \longrightarrow 10$	$021.11.005 \longrightarrow 14$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$029.01.910 \longrightarrow 27$
008.12.100 → 19	013.01.400 → 8	016.01.010 → 10	021.11.010 → 14	026.03.100 → 26	029.02.050 → 27
008.15.002 → 19	013.01.400C → 8	016.01.025 → 10	021.11.020 <b>→</b> 14	026.03.250 → 26	029.02.100 → 27
$008.15.005 \longrightarrow 19$	$013.01.500 \longrightarrow 8$	$016.01.050 \rightarrow 10$	$021.11.025 \longrightarrow 14$	$026.03.500 \longrightarrow 26$	$029.02.250 \longrightarrow 27$
$\begin{array}{ccc} 008.15.010 \longrightarrow 19 \\ 008.15.030 \longrightarrow 19 \end{array}$	$\begin{array}{ccc} 013.01.500C \longrightarrow 8\\ 013.01.901 \longrightarrow 8 \end{array}$	$\begin{array}{ccc} 016.01.100 \longrightarrow 10\\ 016.01.250 \longrightarrow 10 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
$008.15.060 \longrightarrow 19$	$013.01.901C \longrightarrow 8$	$016.01.500 \longrightarrow 10$	$021.15.002 \longrightarrow 14$	$026.04.250 \longrightarrow 27$	$029.02.907 \longrightarrow 27$ $029.02.902 \longrightarrow 27$
008.15.100 → 19	013.01.902 → 8	016.01.901 → 10	021.15.005 <del></del>	026.04.500 → 27	029.02.904 → 27
010.01.005 → 17	$013.01.902C \longrightarrow 8$	016.05.010 → 10	$021.15.010 \longrightarrow 14$	026.04.901 → 27	029.02.906 → 27
$\begin{array}{c} 010.01.006 \longrightarrow 17 \\ 011.01.002 \longrightarrow 16 \end{array}$	$\begin{array}{cccc} 013.01.905 \longrightarrow 8\\ 013.01.910 \longrightarrow 8 \end{array}$	$\begin{array}{ccc} 016.05.025 \longrightarrow 10\\ 016.05.050 \longrightarrow 10 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
$\begin{array}{ccc} 011.01.002 \longrightarrow 16 \\ 011.01.010 \longrightarrow 16 \end{array}$	$\begin{array}{ccc} 013.01.910 \longrightarrow 8\\ 013.13.001 \longrightarrow 9 \end{array}$	$016.05.100 \longrightarrow 10$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$027.01.025 \longrightarrow 28$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
$011.01.025 \rightarrow 16$	$013.13.002 \rightarrow 9$	$016.05.250 \rightarrow 10$	$022.01.001 \rightarrow 14$	$027.01.050 \rightarrow 28$	$029.04.001 \rightarrow 99$
011.02.001 → 16	013.13.003 → 9	016.05.500 → 10	022.02.001 <b>→</b> 15	027.01.100 → 28	029.04.002 <b>→</b> 99
011.02.002 → 16	$013.13.004 \rightarrow 9$	$016.05.901 \longrightarrow 10$	$022.03.001 \rightarrow 15$	$027.01.250 \rightarrow 28$	$029.04.003 \longrightarrow 99$
$\begin{array}{ccc} 011.02.003 \longrightarrow 16\\ 011.02.003.3 \longrightarrow 16 \end{array}$	$\begin{array}{ccc} 013.13.005 \longrightarrow & 9\\ 013.13.010 \longrightarrow & 9 \end{array}$	$\begin{array}{ccc} 016.06.010 \longrightarrow 10 \\ 016.06.025 \longrightarrow 10 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
$011.04.001 \longrightarrow 16$	$013.13.020 \longrightarrow 9$	$016.06.050 \longrightarrow 10$	$022.03.003 \longrightarrow 13$ $022.03.011 \longrightarrow 15$	$027.01.901 \longrightarrow 28$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
011.04.003 → 16	013.13.025 → 9	016.06.100 → 10	022.04.001 → 15	027.01.902 → 28	030.01.051 → 96
011.04.005 → 16	013.13.050 → 9	016.06.250 → 10	022.04.002 <b>→</b> 15	027.01.903 → 28	030.01.052 → 96
$011.04.010 \longrightarrow 16$	$013.15.001 \longrightarrow 9$	$016.06.500 \longrightarrow 10$	$022.06.001 \longrightarrow 15$	$027.01.905 \longrightarrow 28$	$030.01.053 \rightarrow 96$
$\begin{array}{ccc} 011.05.002 \longrightarrow 20\\ 011.05.010 \longrightarrow 20 \end{array}$	$\begin{array}{cccc} 013.15.002 \longrightarrow & 9\\ 013.15.003 \longrightarrow & 9 \end{array}$	$\begin{array}{ccc} 016.06.901 \longrightarrow 10\\ 016.07.010 \longrightarrow 10 \end{array}$	$\begin{array}{r} 023.01.005 \longrightarrow 154 \\ 023.01.010 \longrightarrow 154 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
$011.05.020 \longrightarrow 20$	$013.15.004 \longrightarrow 9$	$016.07.025 \longrightarrow 10$	$023.01.025 \rightarrow 154$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$030.01.102 \longrightarrow 96$
011.05.050 → 20	013.15.005 → 9	016.07.050 → 10	023.01.050 →154	027.03.901 → 28	030.01.103 → 96
$011.05.100 \longrightarrow 20$	013.15.010 → 9	016.07.100 → 10	023.01.100 →154	027.06.100 → 29	030.01.250 → 96
$\begin{array}{c} 011.05.200 \longrightarrow 20\\ 011.05.001 \longrightarrow 20\\ \end{array}$	$\begin{array}{ccc} 013.15.020 \longrightarrow & 9\\ 013.15.025 \longrightarrow & 9 \end{array}$	$016.07.250 \longrightarrow 10$	$\begin{array}{r} 023.02.005 \longrightarrow 154 \\ 023.02.010 \longrightarrow 154 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
$\begin{array}{ccc} 011.05.901 \longrightarrow 20\\ 011.05.905 \longrightarrow 20 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{ccc} 016.07.500 \longrightarrow 10\\ 016.07.901 \longrightarrow 10 \end{array}$	$023.02.010 \longrightarrow 154$ $023.02.025 \longrightarrow 154$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$030.01.500 \longrightarrow 96$
$011.05.910 \longrightarrow 20$	$014.01.005 \longrightarrow 8$	$017.01.010 \rightarrow 11$	023.02.050 →154	$027.06.901 \longrightarrow 29$	$030.01.501 \rightarrow 96$
011.06.002 → 20	014.01.005C → 8	017.01.025 <del></del>	023.02.100 <b>→</b> 154	027.06.902 → 29	030.01.900 <b>→</b> 96
$\begin{array}{c} 011.06.010 \longrightarrow 20\\ 011.06.020 \longrightarrow 20\\ \end{array}$	$014.01.010 \longrightarrow 8$	$017.01.050 \longrightarrow 11$	$\begin{array}{c} 023.03.005 \longrightarrow 154 \\ 022.02.010 \longrightarrow 154 \end{array}$	$027.11.048 \longrightarrow 28$	$030.01.901 \rightarrow 96$
$\begin{array}{ccc} 011.06.020 \longrightarrow 20\\ 011.06.050 \longrightarrow 20 \end{array}$	$\begin{array}{ccc} 014.01.010C \longrightarrow 8\\ 014.01.020 \longrightarrow 8 \end{array}$	$\begin{array}{cccc} 017.02.010 \longrightarrow 11 \\ 017.02.025 \longrightarrow 11 \end{array}$	$\begin{array}{r} 023.03.010 \longrightarrow 154 \\ 023.03.025 \longrightarrow 154 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
$011.06.100 \longrightarrow 20$	$014.01.020 \longrightarrow 8$ $014.01.020C \longrightarrow 8$	$017.02.025 \longrightarrow 11$ $017.02.050 \longrightarrow 11$	$023.03.050 \longrightarrow 154$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$030.02.050 \longrightarrow 96$
011.06.200 → 20	014.01.025 → 8	018.01.010 → 11	023.03.100 <b>→</b> 154	027.17.250 → 29	030.02.051 <b>→</b> 96
011.06.901 → 20	014.01.025C → 8	018.01.025 → 11	025.01.005 → 26	027.17.500 → 29	030.02.052 → 96
$\begin{array}{c} 011.06.905 \longrightarrow 20\\ 011.06.910 \longrightarrow 20\\ \end{array}$	$014.01.026 \longrightarrow 8$	$018.01.050 \rightarrow 11$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$027.17.901 \rightarrow 29$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
$\begin{array}{ccc} 011.06.910 \longrightarrow 20\\ 011.20.002 \longrightarrow 21 \end{array}$	$\begin{array}{ccc} 014.01.026C \longrightarrow 8\\ 014.01.050 \longrightarrow 8 \end{array}$	$\begin{array}{ccc} 018.05.001 \longrightarrow 12 \\ 018.05.002 \longrightarrow 12 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
$011.20.002 \longrightarrow 21$	$014.01.050C \longrightarrow 8$	$018.06.001 \longrightarrow 12$	$025.01.100 \longrightarrow 26$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$030.02.102 \longrightarrow 96$
011.20.020 → 21	014.01.051 → 8	018.06.002 → 12	025.01.150 → 26	028.01.050 → 96	030.02.103 → 96
011.20.050 <b>→</b> 21	014.01.051C → 8	019.01.010 <del></del>	025.01.250 → 26	028.01.051 → 96	030.02.250 → 96

$ \begin{array}{c} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 $	catalogue no // page	catalogue no // page	catalogue no // page	catalogue no // page	catalogue no // page	catalogue no // page	
030         0230         222         66         030         44         90         11         036         01         036         0230         030         030         030         033	030 02 251 → 96	030 40 500 - 97	032 01 250 → 111	036 01 100 - 95	037 30 500B → 54	038 14 100 64	
030 02 500       66       030 01 41 200       77       032 01 901       77       032 01 901       78       033 02 501       78       033 02 501       78       033 02 501       78       033 02 501       78       033 02 501       78       033 02 501       78       033 02 500       78       033 01 500       78       033 01 500       78       033 01 500       78       033 01 500       78       033 01 500       78       033 01 500       78       033 01 500       78       033 01 500       78       033 01 500       78       033 01 500       78       033 01 500       78       030 01 160       030 01							
630 02 900         96         630 41 901         97         632 02 901         153         037 32 001         153         038 14 H46         65           630 02 901         96         630 42 920         97         032 02 600         170         033         037 33 007         55         038 14 H51         65         038 14 H54         65         038 14 H54 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
630 02 8001       66       030 41 802       97       032 02 200       111       037 01 600       153       037 33 001       133       038 14 H85       66         030 02 8002       96       030 42 820       97       032 02 800       111       037 01 000       153       037 33 000       153       037 35 0000       153       037 0000							
$ \begin{array}{c} 330 \\ 320 $							
$ \begin{array}{c} 330.2 \ 9.04 \\ 36 \\ 303 \ 12 \ 0.05 \ 0.05 \\ 303 \ 12 \ 0.05 \ 0.05 \\ 303 \ 12 \ 0.05 \ 0.0$							
030 12 103         96         030 43 500         97         032 03 100         111         037 01 120         153         037 36 0000         50         038 14 1.45         65           030 12 1203         96         030 44 220         97         032 03 201         110         037 01 125         153         037 36 0000         50         038 14 1.45         65           030 12 201         90         030 44 902         97         032 04 100         97         033 11 1250         92         037 02 335         153         077 35 0000         50         038 14 1.450         65           030 24 100         97         030 45 500         97         031 11 250         92         037 02 335         153         077 35 0000         50         038 14 1405         65           030 24 100         97         030 45 200         97         031 14 250         97         031 14 405         65         037 24 000         50         038 14 1405         66           030 25 25 00         97         031 42 250         97         031 12 250         92         037 02 403         153         037 36 000         50         038 14 1405         65           030 25 26 01         97         030 47 200         97         031 12 250 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
030         12.222         96         030         44.200         97         032         03.20         150         037         037         030         95         033         14.145         66           030         12.501         96         030.44.901         97         032.03.901         110         037         0.2204         153         037.23.1608         55         033.84.14.60         65           030.24.100         97         030.45.900         97         031.11.250         92         0.377.25.1008         55         038.14.1406         65           030.25.100         97         030.45.200         97         031.14.05         92         0.377.25.008         55         038.14.1406         65           030.25.100         97         033.11.402         92         037.02.508         153         037.35.000         55         038.14.1406         65           030.25.250         97         030.47.501         97         033.11.425         92         037.04.001         153         077.35.000         55         038.14.1406         65         030.27.250         153         077.35.000         55         038.14.1406         65         030.27.250         153         077.35.0000         50					037.35.050B → 55		
030 12.501         96         030 44 500         97         032 03 501         111         037 02 254         153         037 35 1500         55         038 14 14.50         65           030 12.901         97         030 44 902         97         033 11 1250         92         037 02 230         153         037 35 1500         55         038 14 14.06         65           030 24 100         97         030 45 501         97         033 11 1250         92         037 02 230         153         037 35 1500         55         038 14 14.06         65           030 25 2500         97         033 11 420         92         037 02 503         153         037 36 000         50         038 14 14.06         65           030 25 500         97         033 11 400         92         037 02 503         153         037 36 001         50         038 14 14.06         65           030 25 601         97         033 12 12 250         92         037 02 503         153         037 36 001         50         038 14 14.06         65           030 25 601         97         033 12 400         92         037 04 003         153         037 36 001         50         038 14 126         63         038 14 126         63         038 14 1							
03.0 24 050       97       030.4 4500       97       030.2 4500       50       038.1 44.00       66         030.2 4 050       97       030.4 4500       97       033.1 1200       92       037.0 2353       133       037.3 2508       50       038.1 44.00       60         030.2 4 100       97       030.4 5.000       97       033.1 1200       92       037.0 2353       113       037.3 2508       50       038.1 44.400       60         030.2 5.100       97       033.1 1202       92       037.0 2402       153       037.3 25000       50       038.1 44.400       66         030.2 5.100       97       033.1 1400       92       037.0 2500       153       037.3 25000       50       038.1 44.400       66         030.2 5.100       97       033.1 2400       92       037.0 2500       133       037.3 6.002       50       038.1 44.400       66         030.2 5.2500       97       030.4 7.500       97       033.1 2252       92       037.0 4.002       133       037.3 6.002       50       038.1 44.402       66       030.2 7.001       97       033.1 2252       92       037.0 4.002       133       037.3 5.000       50       038.1 44.402       66       030.3 14.000 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
a30 24 100       7       030 44 100       97       033 11 1260       92       037 02 305       133       037 33 1280       95       038 14 100       65       038 14 1405       65         030 24 100       97       030 45 200       97       033 11 225       92       037 02 357       133       037 33 2260       55       038 14 1445       65         030 25 100       97       030 45 200       97       033 11 1263       92       037 02 498       133       037 38 2000       55       038 14 1445       65         030 25 100       97       030 47 250       97       033 11 400       92       037 02 498       133       037 38 6000       56       038 14 4445       66         030 26 2500       97       030 47 250       97       033 12 280       92       037 04 020       133       037 38 6000       56       038 18 065       63         030 26 2500       97       033 12 2402       92       037 04 003       133       037 38 6000       56       038 18 165       66       030 27 250       50       038 18 165       63       038 18 165       63       038 18 165       63       038 18 165       63       038 18 165       63       038 18 165       63       038 18 1							
303 04 2600       97       033 11 262       92       037 02 353       -133       037 33 2808       55       038 14 M40       66         030 26 2500       97       033 11 262       92       037 02 402       -133       037 33 5008       55       038 14 M40       66         030 25 2500       97       034 46 250       97       033 11 262       92       037 02 503       133       037 33 5008       55       038 14 M40       66         030 25 2500       97       034 46 500       97       033 11 402       92       037 02 503       133       037 35 6004       55       038 14 M400       66         030 25 200       97       030 47 500       97       033 11 402       92       037 02 508       133       037 35 6004       55       038 18 085       63         030 25 200       97       030 47 100       97       033 12 240       92       037 04 002       133       136       037 35 6004       55       038 18 085       63         030 27 100       97       034 49 025       98       033 12 403       92       037 06 005       122       037 03 04 90       55       038 18 105       63       038 18 105       63       038 18 105       63       038 18 106 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>							
030 25 100       97       030 45 250       97       033 11 400       92       037 02 402       133       037 35 5008       55       038 14 M450       66         030 25 250       97       030 46 500       97       033 11 400       92       037 02 503       133       037 36 001       55       038 14 M450       66         030 25 901       97       030 46 500       97       033 11 400       92       037 02 603       133       037 36 001       55       038 14 M40       66         030 25 801       97       033 12 12 552       92       037 02 603       133       037 36 100       56       038 14 100       56       038 17 005       56       038 17 100       56       038 17 005       56       038 17 005       56       038 17 005       56       038 18 100       63       038 07 100       57       030 04 025       98       033 12 403       92       037 06 100       128       037 38 100W       55       038 18 125       63       030 27 500       57       036 04 025       98       033 12 403       92       037 06 100       128       038 02 160       53       038 18 125       63       038 18 125       63       038 18 125       63       038 18 125       63       038 18 11							
030.25.800       97       030.45.800       97       033.11.400       92       037.02.408       133       037.35.001       57       038.14.M00       66         030.25.800       97       030.45.800       97       033.11.403       92       037.02.508       133       037.35.001       57       037.35.001       56       038.14.M00       66         030.25.800       97       030.47.500       97       033.17.220       92       037.02.508       133       037.35.001       56       038.14.M00       66         030.25.800       97       030.47.500       97       033.17.22.90       92       037.02.601       133       037.35.001       50       038.14.M00       66       63       030.25.900       97       030.47.500       97       030.47.500       97       030.49.015       93.81.24.02       037.05.030       152       037.85.00M       55       038.18.17.50       63       030.27.900       97       030.49.055       088       038.12.402       92       037.05.005       152       038.02.130       63       038.19.035       66       030.28.100       152       038.02.130       63       038.19.045       66       030.28.100       152       038.02.130       63       038.19.045							
333       255.00       97       333       47.402       92       37.02.503       153       337.36.002       56       388.14.MP0       66         333       25.500       97       033.47.250       97       033.17.160       92       037.02.503       153       037.36.002       56       038.14.MP2       66         333       25.600       97       033.47.250       97       033.17.252       92       037.02.603       153       037.36.004       55       038.17.007       64         333       12.252       92       037.02.603       153       037.36.004       55       038.18.065       63         333       12.252       92       037.04.003       153       037.36.004       55       038.18.102       63			$033.11.253 \longrightarrow 92$ $033.11.400 \longrightarrow 92$				
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$							
030 26 2500       97       030 47.500       97       033 12.250       92       037.04.001       153       037.36026W       55       038.18.085       63         030 26 55.00       97       030 47.902       97       033 12.253       92       037.04.003       153       037.36026W       55       038.18.085       63         030 27 5500       97       030 49.025       98       033.12.402       92       037.05.003       152       037.36520W       55       038.18.10.65       63         030 27 5500       97       030 49.025       98       033.12.402       92       037.05.005       152       037.0520W       55       038.18.10.65       63       038.18.10.65       63       038.18.10.65       63       038.18.10.65       63       038.18.10.43       65       038.18.10.43       65       038.18.10.44       65       038.18.10.44       65       038.18.10.44       65       038.18.10.44       65       038.18.10.46       63       038.18.10.46       63       038.18.10.46       63       038.18.10.46       63       038.18.10.46       63       038.18.10.46       63       038.18.10.46       63       038.18.10.46       63       038.18.10.46       63       038.18.10.46       63       038.18.10.46 <td></td> <td></td> <td></td> <td>037.02.508 <b>→</b>153</td> <td></td> <td></td>				037.02.508 <b>→</b> 153			
030 26 800       97       030 47.901       97       033 12 252       92       037.04.002       153       037.36100W       55       038.18.110       65       038.18.100       65       038.18.100       65       038.18.100       65       038.18.100       66       038.18.100       66       038.18.100       66       038.18.100       66       038.18.100       66       038.18.100       66       038.18.100       66       038.18.100       66       038.18.100       66       038.18.100       66       038.18.100       66       038.18.100       66       038.18.100       66       038.18.100       66							
030.26.101       97       030.47.902       97       033.12.402       92       037.04.003       fis       037.36150W       55       038.18.10.65       63         030.27.250       97       030.49.025       98       033.12.402       92       037.05.003       fis       037.36550W       55       038.18.125       63         030.27.500       97       030.49.025       98       033.12.402       92       037.05.000       fis       037.36500W       55       038.18.125       63       038.12.205       038.02.065       63       038.19.045       63       038.12.206       038.12.206       038.02.106       63       038.02.106       63       038.12.206       63       038.02.150       65       038.19.066       63       038.19.066       63       038.02.150       65       038.19.066       63       038.19.066       66       032.28.100       97       030.55.260       98       033.13.403       92       037.07.002       fis       038.03.160       63       038.20.256       63       038.20.256       63       038.20.256       63       038.20.256       63       038.20.256       63       038.20.256       63       038.20.256       63       038.20.256       63       038.20.216       63       0							
030       27       030       49       033       12       400       92       037       04       003       125       037       037       032       037       033       02       033       12       037       037       037       037       033       12       037       037       033       12       037       033       033       12       037       036       02       037       036       02       037       036       02       037       036       02       037       036       02       037       036       02       036       038       02       036       02       036       02       036       02       036       02       036       02       036       02       036       02       036       038       02       037       06       036       038       038       038       038       038       038       038       038       038       02       037       007       036       038							
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$							
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	030.28.250 <b>→</b> 97	030.52.100 → 98	033.13.253 → 92	037.06.100 →152	038.02.150 → 63	038.19.052 <b>→</b> 65	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
030.32.100       97       030.58.050       99       033.17.4603       93       037.15.100       -152       038.08.050       63       039.05.250       62         030.32.250       97       030.58.100       99       033.17.163       93       037.16.005       152       038.08.050       63       039.05.200       62         030.32.901       97       030.58.250       99       033.17.163       93       037.16.005       152       038.08.100       63       039.06.220       62         030.32.901       97       030.59.250       99       033.17.400       93       037.19.007       152       038.08.150       63       039.06.220       62         030.33.250       97       030.59.500       99       033.17.403       93       037.19.100       152       038.09.060       63       039.07.200       62         030.33.500       97       030.60.003       87       033.18.160       93       037.21.007       152       038.09.100       63       039.07.200       62         030.33.902       97       030.60.005       87       033.18.250       93       037.21.007       152       038.09.100       63       039.08.100       79       030.60.006       87							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	030.32.100 <b>→</b> 97				038.08.050 → 63	039.05.250 → 62	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	030.33.250 → 97	030.59.250 → 99	033.17.400 → 93	037.19.100 →152		039.07.200 → 62	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$				037.23.070 →152			
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	030.37.500 <b>→</b> 97	031.04.500 →110	035.13.030 → 95	037.30.010B → 54	038.13.A41 → 65	039.21.003 <b>→</b> 79	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$							
$\begin{array}{cccccccccccccccccccccccccccccccccccc$		031.06.250 →110		037.30.050W → 54	038.13.S35 — 64	039.23.003 → 80	
$030.39.901 \longrightarrow 97  032.01.050 \longrightarrow 111  036.01.030 \longrightarrow 95  037.30.250B \longrightarrow 54  038.14.060 \longrightarrow 64  039.30.003 \longrightarrow 78$							

0.93       0.93       4.10       0.51       2.10       0.93       4.10       0.51       2.10       0.93       4.10       0.51       2.10       0.93       4.10       0.51       2.10       0.93       4.10       0.51       2.10       0.93       4.10       0.51       2.10       0.93       4.10       0.51       2.10       0.93       4.10       2.10       0.93       4.10       1.10       0.51       2.100       0.93       4.10       2.10       0.93       2.10       0.10       2.10       0.10       2.10       0.10	catalogue no // page	catalogue no // page	catalogue no // page	catalogue no // page	catalogue no // page	catalogue no // page
333 44 105       79       0430 1122       106       047 10 300       30       049 08 300       48       65 12 1.000       69       052 13 002       68         033 45 00       79       0443 01 124       106       047 13 002       68       051 12 1007       68       052 13 002       68         033 15 007       79       0443 01 504       106       047 13 002       68       052 13 002       68       052 13 003       68         044 01 100       104       043 01 503       106       047 32 210       77       050 04 002       49       051 22 003       68       052 13 005       68       052 13 005       68       052 13 005       68       052 13 005       68       052 13 005       68       052 13 005       68       052 13 005       68       052 13 005       68       052 13 005       68       052 13 005       68       052 13 005       68       052 15 000       67       040 12 005       68       052 15 000       67       040 12 005       68       052 15 000       67       040 12 005       68       052 15 000       67       040 12 005       68       052 15 000       67       040 12 005       68       052 15 000       67       040 12 005       040 12 005       040 12	039.30.005 → 78	043.01.121 →105	047.10.200 → 53	049.09.250 → 48	051.21.007 → 69	052.12.008 → 66
039         4130         72         0430         71         100         66         051         100         66         052         100         67         052         100         67         052         100         67         052         100         67         052         100         67         052         100         67         052         100         67         052         100         67         052         100         67         052         100         67         052         100         67         052         100         67         050         100						
G39 35.145       79       043 01.50       106       047 32.160       57       050 01.400       49       051.22003       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.13005       68       052.15005       67       050.05001       48       051.22005       68       052.15005       67       050.05001       48       051.22005       68       052.15005       67       060.05001       68       052.15005       67       060.05001       68       052.15005       67       060.05001       68       052.15005       67       060.05001       68       052.15005       67       060.05001       68       051.22011       68       052.15005       67       060.051.22011       68       052.15005       67       040.05002       69       051.22011       68       052.1500506       67						
393       32.00       73       643.01.502       105       647.32.210       57       050.04.001       49       051.22.002       88       052.13.005       68         040       01.00       043.01.500       105       647.33.150       57       050.05.150       49       051.22.004       88       052.13.005       68       052.13.007       68       052.13.007       68       052.13.007       68       052.13.007       68       052.13.007       68       052.13.007       68       052.13.007       68       052.13.007       68       052.13.007       68       052.13.007       68       052.13.007       68       040.01.00       040.01.00       040.01.00       040.01.00       68       052.15.000       67       051.22.007       68       052.15.000       67       040.22.00       68       052.15.000       67       040.22.00       68       052.15.000       67       040.22.00       68       052.15.000       67       040.20.00       68       052.15.000       67       040.20.00       68       052.15.000       67       040.20.00       68       052.15.000       67       040.20.00       68       052.15.000       67       040.00       040.00       040.00       040.00       040.00       040						
640 01 100         104         643 01 503         105         647 32 210         57         050 04 022         49         051 22 003         68         052 13 006         66           040 01 250         104         043 02 031         105         047 03 180         57         050 05 200         48         051 22 005         68         052 13 006         66           041 01 500         104         043 02 031         105         044 01 5902         104         64 05 122 005         68         052 150 0166         67           041 02 100         104         043 02 031         105         044 01 113         58         050 00 106         47         051 22 000         68         052 150 0166         67           040 02 250         104         043 02 032         105         044 01 140         58         050 04 000         67         051 22 013         68         052 150 0166         67         051 22 013         68         052 150 006         67         040 20 201         68         051 22 013         68         052 150 006         051 22 013         68         052 150 006         051 22 013         68         052 150 006         051 22 013         68         052 150 006         051 22 013         68         052 150 006         051						
640 01.250         104         643 01.504         105         647 33 150         57         650 65 150         49         051 22.004         68         052 13.007         66           040 01 500         104         043 02.022         105         047 03 21.00         64         051 22.006         68         052 13.009         66           040 01 900         104         043 02.022         105         046 01 900         148         051 22.006         68         052 13.009         66           040 02.500         104         043 02.051         105         044 01 135         58         050 08.075         67         051 22.009         68         052 15010R         67           040 02.200         104         043 02.053         105         044 01 200         551 03.007         67         051 22.011         68         052 15010R         67         040 22.021         68         051 03.006         69         051 22.011         68         052 160.007         67         040 22.021         68         051 03.006         69         051 22.011         68         051 03.006         69         051 22.011         68         051 22.011         68         052 16.020         67         040 05.021         050 02.020         551 04.000         <						
04001901         100         04302022         100         0473220         67         05007050         48         05122006         68         05213000         66           04001902         100         04302023         100         04302023         100         04302023         100         64         05122008         69         052150100         67           04402230         104         04302033         105         04401130         55         05501010         110         55         05501010         110         55         05501010         110         55         05501010         110         110         110         110         55         05510100         110         110         0430200         110         0402500         110         0402500         110         0402500         110         0402500         110         0402500         110         0402500         110         0402500         110         0402500         05122011         05         05122011         05         05122011         05         05124000         100         05122011         05         0514000         100         05122011         05         0514000         100         05122011         05         05140000         100         05124000						
0400.1902         104         04302.103         105         0450.1115         55         0550.70.60         49         051.22.007         68         052.150.106         67           04002.100         104         04302.203         104         04302.203         104         04302.203         104         04302.203         104         04302.203         104         04302.203         104         04302.203         104         04302.203         104         04302.203         104         04302.203         104         04302.203         105         04402.200         104         04302.203         105         04302.203         105         0402.200         104         04302.203         105         04402.200         104         04302.203         107         04402.200         103         106         0402.200         0512.20.116         68         052.15.0008         67         0402.200         104         04302.200         107         04402.130         88         051.03.003         69         051.22.014         68         052.16.012         67         0401.020         104.01         104.01         104.01         104.01         104.01         104.01         104.01         104.01         104.01         104.01         104.01         104.01         104.01						
add 02:100         104         dd 02:201         100         dd 02:201         64         05:11:20         64         02:12:00         64         02:12:00         64         02:15:00         67         03:12:00         68         02:15:00         67         03:12:00         68         02:15:00         67         03:12:00         68         02:15:00         67         03:12:00         68         02:15:00         67         03:12:00         68         02:15:00         67         03:12:00         68         02:15:00         68         02:15:00         67         03:12:01         68         02:15:00         67         03:12:01         68         02:15:00         67         03:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         68         02:12:01         02:01						
$ \begin{array}{c} 040 \\ 040 \\ 020 \\ 040 $						
				050.08.100 <b>→</b> 61	051.22.010 → 68	052.15.015B → 67
640.63.001       104       43.03.002       107       048.01.200       68       051.03.002       69       051.22.013       68       062.15.0200       67         040.03.003       104       043.03.003       107       048.02.130       58       051.03.004       69       051.22.015       68       052.15.0200       67         040.03.001       105       043.03.003       107       048.02.130       58       051.03.006       69       051.22.016       68       052.16.016       67         040.03.001       105       043.03.005       107       048.02.145       58       051.03.006       69       051.22.017       68       052.17.020       67         041.01.060       102       043.05.106       106       048.03.001       59       051.04.002       69       051.22.027       68       062.17.020       67         041.01.060       102       043.05.106       106       048.06.002       50       051.04.006       69       051.22.027       68       062.27.7.020       67         041.01.120       102       043.06.01       106       048.06.002       50       051.04.006       69       051.23.007       68       052.22.008       66       052.22.008       66						
040 05 002       r04       043 03 002       r07       048 02 r130       68       051 r03 r03       r08       051 r22 r014       68       662 r152 0074       68       652 r16 0176       67       68       052 r16 0176       67       68       052 r16 0176       67       68       052 r16 0176       68       052 r17 020       67       68       051 r22 0074       68       052 r17 020       67       041 01 100       102       043 06 011       106       048 07 105       58       051 04 0075       69       051 r23 002       68       052 r22 008       67       041 01 100       102       043 08 001       105       048 07 1155       58       051 04 0075       69       051 r23 007       68       052 r22 008       67       041 02 208       052 r22 008       67       041 02 208       051 r23 007       68       051 r23 007	$040.02.902 \rightarrow 104$					
040 05 003       r104       043 03 003       r107       048 02 r115       s8       051 r03 r04       s8       051 r04 r01       s8       051 r04 r02       s8       051 r04 r01 r02       s8       051 r04 r01 r02 <t< td=""><td></td><td></td><td></td><td></td><td></td><td></td></t<>						
040.0001       106       043.03.005       107       048.02.145       68       051.03.006       60       051.22.017       68       052.16.016       67         040.10.005       100       043.03.007       107       048.03.001       58       051.03.007       68       051.22.0178       68       052.16.022       68       052.17.012       67         041.01.040       102       043.05.103       106       048.04.001       108       051.04.002       69       051.22.027       68       052.17.012       67         041.01.100       102       043.05.103       106       048.06.001       108       051.04.003       69       051.22.027       68       052.17.012       67         041.01.100       102       043.06.001       106       044.06.001       108       051.04.005       69       051.22.017       68       052.12.001       68       051.22.010       68       051.22.000       68       051.22.017       68       051.22.017       68       051.22.017       68       051.22.017       68       051.22.017       68       051.22.017       68       051.22.017       68       051.22.017       68       051.22.017       68       051.22.017       68       051.22.017       68			048.02.115 → 58			
040 10 0001       100       043 0.3 0007       107       044 0.3 007       80       651 0.4 001       68       051 0.2 018       68       052 1.6 020       657         041 01 0.040       102       043 0.5 103       106       044 0.03 002       58       051 0.4 003       69       051 2.2 0.01       68       052 1.6 0.20       67       67       041 0.1 0.60       102       043 0.5 103       100       044 0.01 008       651 0.4 0.03       69       051 2.2 0.01       68       052 1.2 0.01       68       052 1.2 0.01       68       052 1.2 0.01       68       052 1.2 0.01       68       052 1.2 0.01       68       052 1.2 0.01       68       052 1.2 0.01       68       052 2.2 0.06       67         041 0.1 0.50       07       043 0.8 0.15       105       044 0.07       69       051 2.2 0.01       68       052 2.2 0.06       67         041 0.2 040       102       043 0.8 0.15       040 0.7 1.60       38       051 0.8 0.10       69       051 2.2 0.01       652 2.2 0.06       67         041 0.2 040       102       043 0.8 0.50       048 0.7 1.60       38       051 0.8 0.10       69       651 2.2 0.01       652 2.2 0.06       67       041 0.2 0.00       69       051 2.2 0.01       60						
040 10 005       100       043 0.3 007       107       044 0.3 001       68       051 .04 002       68       051 .22 020       68       052 .12 020       68       052 .12 020       68       052 .12 020       68       052 .12 020       68       052 .12 020       68       052 .12 020       68       052 .12 020       68       052 .12 020       68       052 .12 020       68       052 .12 020       68       052 .12 020       68       052 .12 020       68       052 .12 000       68       052 .12 000       68       052 .12 000       68       052 .12 000       68       052 .22 006       67         041 01 .100       102       043 .08 0.01       106       043 .07 .105       58       051 .04 0.007       69       051 .23 .004       68       052 .22 .006       67         041 .02 .040       102       043 .03 .015       043 .07 .105       58       051 .08 .017       69       051 .23 .004       68       052 .23 .006       67       241 .02 .040       102       102       043 .03 .015       044 .03 .106       59       051 .08 .017       60       051 .23 .006       68       052 .23 .006       67       241 .02 .200       154       044 .03 .106       102       102       052 .24 .008       67       241 .02 .106						
041.01.040       102       043.05.101       106       044.04.003       69       051.22.021       68       052.17.012       67         041.01.080       102       043.05.103       106       044.06.001       59       051.04.004       69       051.22.021       68       052.17.030       67         041.01.120       102       043.06.011       106       044.06.001       59       051.04.004       69       051.23.001       68       052.12.001       68       052.12.001       68       052.22.006       67         041.01.150       02       043.08.015       105       043.07.130       68       051.08.010       69       051.23.005       66       052.23.006       67         041.02.060       102       043.08.050       105       043.07.160       58       051.08.014       69       051.23.007       66       052.23.008       66       052.23.008       66       052.23.008       66       052.23.008       66       052.23.008       66       052.24.000       67       041.02.100       043.02.001       50       044.08.105       50       51.08.024       69       051.23.007       66       052.24.006       67       041.02.150       040.02.01       50       440.04.08.01       50 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
041 01.1080       102       043.05.106       106       048 06.001       56       051.04.004       69       051.23.001       68       052.17.030       67         041 01.102       102       043.06.011       106       048 07.105       58       051.04.006       69       051.23.001       68       052.22.006       67         041 02.106       102       043.06.051       105       048 07.130       58       051.04.007       69       051.23.004       68       052.22.006       67         041 02.060       102       043.06.050       105       048 07.160       58       051.08.014       69       051.23.006       68       052.22.016       67         041 02.100       102       043.20.002       154       048 07.160       58       051.08.019       69       051.23.007       68       052.24.006       67         041 02.100       102       043.20.002       154       048 08.103       58       051.08.029       69       051.23.017       68       052.24.006       67         041 03.080       102       045.04.011       50       048.01.03.25       051.08.029       69       051.23.017       68       052.24.006       67       041.05.000       102       046.05.02.						
041 01 120       102       043.06 001       106       048 06.002       58       051.04 005       69       051.23 001       68       052.22 006       67         041 01 120       102       043.08 030       105       048.07.115       58       051.08 007       69       051.23 003       68       052.22 006       67         041 02 2060       102       043.08 030       105       048.07.150       58       051.08 014       69       051.23 005       68       052.22 016       67         041 02 2060       102       043.20 0001       154       048.07.100       58       051.08 014       69       051.23 006       68       052.23 016       67         041 02 120       102       043.20 002       154       048 07.200       58       051.08 024       69       051.23 007       68       052.23 016       67         041 02 120       102       043.00 01       50       048.08 115       58       051.08 024       69       051.23 017       68       052.25 016       67         041 03 080       102       045.00 01       50       048.01 110       58       051.09 457       69       051.23 014       68       052.25 016       67         041 03 0500		043.05.103 →106	048.04.001 →108		051.22.021 → 68	052.17.020 → 67
$ \begin{array}{c} 041 \ 0.1 \ 150 \ 162 \ 043 \ 0.0 \ 037 \ 153 \ 048 \ 0.71 \ 153 \ 058 \ 051 \ 0.0 \ 049 \ 051 \ 23 \ 003 \ 068 \ 052 \ 22 \ 006 \ 677 \ 041 \ 02 \ 040 \ 012 \ 043 \ 008 \ 030 \ 105 \ 048 \ 071 \ 300 \ 358 \ 051 \ 08 \ 010 \ 269 \ 051 \ 23 \ 005 \ 688 \ 052 \ 23 \ 006 \ 677 \ 041 \ 02 \ 100 \ 102 \ 043 \ 02 \ 007 \ 154 \ 048 \ 071 \ 000 \ 588 \ 051 \ 08 \ 010 \ 169 \ 051 \ 23 \ 005 \ 688 \ 052 \ 23 \ 006 \ 677 \ 041 \ 02 \ 100 \ 102 \ 043 \ 20 \ 007 \ 154 \ 048 \ 071 \ 000 \ 588 \ 051 \ 08 \ 010 \ 169 \ 051 \ 23 \ 007 \ 688 \ 052 \ 23 \ 006 \ 677 \ 041 \ 02 \ 100 \ 110 \ 102 \ 043 \ 20 \ 007 \ 154 \ 048 \ 071 \ 000 \ 588 \ 051 \ 08 \ 024 \ 071 \ 088 \ 051 \ 23 \ 007 \ 688 \ 052 \ 23 \ 006 \ 677 \ 041 \ 02 \ 100 \ 110 \ 102 \ 045 \ 010 \ 100 \ 100 \ 048 \ 011 \ 100 \ 588 \ 051 \ 08 \ 024 \ 09 \ 051 \ 23 \ 009 \ 688 \ 052 \ 24 \ 006 \ 677 \ 041 \ 003 \ 000 \ 102 \ 045 \ 000 \ 102 \ 045 \ 000 \ 102 \ 045 \ 000 \ 102 \ 045 \ 000 \ 102 \ 045 \ 000 \ 102 \ 045 \ 000 \ 102 \ 045 \ 000 \ 102 \ 045 \ 000 \ 102 \ 045 \ 000 \ 102 \ 045 \ 000 \ 102 \ 045 \ 000 \ 051 \ 23 \ 001 \ 100 \ 000 \ 051 \ 23 \ 001 \ 100 \ 000 \ 051 \ 23 \ 001 \ 100 \ 051 \ 000 \ 051 \ 23 \ 001 \ 100 \ 051 \ 000 \ 051 \ 03 \ 000 \ 051 \ 000 \$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$		045.03.001 → 50		051.09.45B → 69	051.23.010 → 68	052.24.010 → 67
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	$041.05.040 \rightarrow 102$					
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	041.05.100 →102	046.05.001 → 51			051.23.015 → 68	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$			048.50.002 → 60			
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	042.02.090 →104	047.05.002 → 54		051.20.008 → 68	051.26.008 → 68	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	042.03.100 →103		049.04.175 <b>→</b> 49		052.10.004 → 66	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	042.06.001 →103	047.08.180 → 53	049.06.004 → 48	051.20.019 → 68	052.11.002 → 66	057.05.020 →158
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$						
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	043.01.054 →105	047.09.180 → 53	049.07.006 → 48	051.21.002 → 69	052.12.003 → 66	057.06.037 →158
$043.01.073 \rightarrow 105  047.10.100 \rightarrow 53  049.08.110 \rightarrow 64  051.21.005 \rightarrow 69  052.12.006 \rightarrow 66  058.02.001B \rightarrow 71$						

catalogue no // page	catalogue no // page	catalogue no // page	catalogue no // page	catalogue no // page	catalogue no // page	
058.02.001R → 71	061.10.901 → 33	061.29.901 → 37	062.51.500 → 39	064.12.005 → 82	065.44.004 → 84	
$058.02.002 \longrightarrow 72$	$061.11.050 \rightarrow 33$	$061.41.500 \rightarrow 34$	$062.51.501 \longrightarrow 39$	$064.12.006 \longrightarrow 82$	$000.44.007 \longrightarrow 04$ $065.44.005 \longrightarrow 84$	
058.02.101 → 71	061.11.100 → 33	061.41.901 → 34	062.51.502 → 39	064.12.007 → 82	065.45.001 → 85	
058.03.001 → 70	061.11.250 → 33	061.41.902 → 34	062.52.500 → 39	064.12.008 → 82	065.45.002 → 85	
058.04.001 → 72	$061.11.500 \longrightarrow 33$	$061.41.905 \longrightarrow 34$	$062.53.500 \longrightarrow 39$	$064.12.009 \longrightarrow 82$	065.45.005 → 85	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{ccc} 061.11.901 \longrightarrow 33 \\ 061.13.001 \longrightarrow 37 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{ccc} 064.12.010 \longrightarrow 82 \\ 064.12.011 \longrightarrow 82 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
$058.05.100 \longrightarrow 72$ $058.05.125 \longrightarrow 72$	$061.13.002 \longrightarrow 37$	$001.42.250 \longrightarrow 35$ $061.42.500 \longrightarrow 35$	$062.56.500 \longrightarrow 39$ $062.56.500 \longrightarrow 39$	$064.12.012 \longrightarrow 82$	$005.46.002 \longrightarrow 85$ $065.46.005 \longrightarrow 85$	
$058.05.150 \longrightarrow 72$	$061.13.004 \rightarrow 37$	$061.42.901 \longrightarrow 35$	$062.57.500 \rightarrow 39$	$065.10.001 \rightarrow 194$	$065.46.006 \longrightarrow 85$	
058.06.001 <b>→</b> 91	061.13.006 <b>→</b> 37	061.42.902 → 35	062.58.500 → 39	065.10.004 →194	065.47.001 → 85	
058.07.001 → 74	061.13.008 → 37	061.42.911 → 35	062.60.901 →123	065.10.006 →194	065.47.003 → 85	
059.02.001 →138	$061.14.025 \longrightarrow 33$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	062.60.902 → 123	$065.18.001 \longrightarrow 84$	$065.48.001 \longrightarrow 85$	
059.02.002 →138 059.02.003 →138	$\begin{array}{ccc} 061.14.060 \longrightarrow 33 \\ 061.14.120 \longrightarrow 33 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{c} 062.60.903 \longrightarrow 123 \\ 062.60.905 \longrightarrow 123 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
059.02.004 →138	$061.14.300 \rightarrow 33$	$061.47.125 \longrightarrow 34$	062.60.909 →123	$065.18.004 \longrightarrow 84$	$065.52.029 \longrightarrow 86$	
059.03.003 →141	061.14.600 <b>→</b> 33	061.47.250 <b>→</b> 34	062.60.918 →123	065.19.141 → 82	065.53.014 → 86	
059.03.004 →141	$061.14.901 \longrightarrow 33$	061.47.500 → 34	062.61.909 →123	065.19.142 → 82	065.53.029 → 86	
$\begin{array}{r} 059.05.001 \longrightarrow 138 \\ 060.01.001 \longrightarrow 139 \end{array}$	$\begin{array}{ccc} 061.14.906 \longrightarrow 33 \\ 061.14.912 \longrightarrow 33 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
$060.01.002 \longrightarrow 139$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$062.02.100 \longrightarrow 41$ $062.03.100 \longrightarrow 41$	$062.66.004 \longrightarrow 42$	$005.19.292 \longrightarrow 82$ $065.19.293 \longrightarrow 82$	$005.54.029 \longrightarrow 80$ $065.55.001 \longrightarrow 86$	
060.01.003 →140	$061.15.100 \rightarrow 31$	$062.04.100 \rightarrow 41$	$062.66.500 \rightarrow 42$	$065.21.014 \longrightarrow 82$	065.55.002 → 86	
060.02.001 →140	061.15.250 <b>→</b> 31	062.04.101 → 41	062.66.901 → 42	065.21.029 → 82	065.55.003 <b>→</b> 86	
060.03.001 →140	061.15.500 → 31	$062.05.05B \longrightarrow 38$	$062.66.902 \longrightarrow 42$	065.22.014 → 83	065.55.004 → 86	
$\begin{array}{rrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrrr$	$\begin{array}{ccc} 061.15.901 \longrightarrow 31 \\ 061.15.902 \longrightarrow 31 \end{array}$	$\begin{array}{ccc} 062.05.05G \longrightarrow 38\\ 062.05.05R \longrightarrow 38 \end{array}$	$\begin{array}{r} 062.80.901 \longrightarrow 123 \\ 062.80.903 \longrightarrow 123 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
$061.01.100 \longrightarrow 30$	$061.16.100 \longrightarrow 31$	$062.05.05 R \rightarrow 38$ $062.05.05 Y \rightarrow 38$	$062.80.903 \longrightarrow 123$ $062.80.905 \longrightarrow 123$	$005.23.074 \longrightarrow 83$ $065.23.029 \longrightarrow 83$	$005.56.002 \longrightarrow 80$ $065.56.003 \longrightarrow 86$	
$061.01.100C \longrightarrow 30$	$061.16.250 \rightarrow 31$	$062.05.100 \longrightarrow 38$	062.80.912 →123	$065.24.014 \longrightarrow 83$	065.56.004 → 86	
061.01.250 <b>→</b> 30	061.16.500 → 31	062.05.250 → 38	062.80.925 →123	065.24.029 → 83	065.57.001 → 87	
061.01.250C → 30	$061.16.901 \longrightarrow 31$	$062.05.500 \longrightarrow 38$	$063.01.010 \longrightarrow 82$	$065.25.014 \longrightarrow 83$	065.57.002 → 87	
$\begin{array}{ccc} 061.01.500 \longrightarrow 30\\ 061.01.500C \longrightarrow 30 \end{array}$	$\begin{array}{ccc} 061.16.902 \longrightarrow 31 \\ 061.17.100 \longrightarrow 31 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{ccc} 063.01.012 \longrightarrow 82 \\ 063.01.014 \longrightarrow 82 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$061.17.250 \longrightarrow 31$	$062.08.500 \longrightarrow 38$	$063.01.014 \longrightarrow 82$ $063.01.019 \longrightarrow 82$	$065.26.074 \longrightarrow 83$ $065.26.029 \longrightarrow 83$	$065.58.001 \longrightarrow 87$	
$061.01.901C \rightarrow 30$	$061.17.500 \rightarrow 31$	$062.09.05B \longrightarrow 39$	$063.01.024 \rightarrow 82$	$065.27.014 \rightarrow 83$	$065.58.002 \longrightarrow 87$	
061.01.902 <b>→</b> 30	061.17.901 <b>→</b> 31	062.09.05G → 39	063.01.029 → 82	065.27.029 → 83	065.58.003 <b>→</b> 87	
061.01.902C → 30	$061.17.902 \longrightarrow 31$	$062.09.05R \rightarrow 39$	$063.01.034 \longrightarrow 82$	$065.28.014 \longrightarrow 83$	065.58.004 → 87	
$\begin{array}{ccc} 061.01.903 \longrightarrow 30 \\ 061.01.905 \longrightarrow 30 \end{array}$	$\begin{array}{ccc} 061.18.100 \longrightarrow 31 \\ 061.18.250 \longrightarrow 31 \end{array}$	$\begin{array}{ccc} 062.09.05Y \longrightarrow 39 \\ 062.10.010 \longrightarrow 41 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
$061.01.903 \longrightarrow 30$ $061.01.910 \longrightarrow 30$	$061.18.500 \longrightarrow 31$	$062.10.015 \longrightarrow 41$	$003.02.010 \longrightarrow 02$ $063.02.012 \longrightarrow 82$	$005.29.014 \longrightarrow 0000000000000000000000000000000000$	$005.00.130 \longrightarrow 89$ $065.62.100 \longrightarrow 89$	
061.01.920 → 30	061.18.901 → 31	$062.10.020 \rightarrow 41$	$063.02.014 \longrightarrow 82$	$065.30.014 \longrightarrow 88$	065.62.130 → 89	
061.02.100 → 30	061.18.902 → 31	062.10.030 → 41	063.02.019 → 82	065.30.029 → 88	065.62.180 → 89	
$061.02.100C \longrightarrow 30$	$061.20.001 \longrightarrow 32$	$062.11.250 \longrightarrow 38$	$063.02.024 \longrightarrow 82$	$065.31.014 \longrightarrow 88$	$065.63.100 \longrightarrow 89$	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccc} 065.31.029 \longrightarrow 88 \\ 065.32.014 \longrightarrow 88 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
$001.02.2300 \longrightarrow 30$ $061.02.500 \longrightarrow 30$	$061.21.500 \longrightarrow 36$	$062.12.100 \longrightarrow 41$	$003.02.034 \longrightarrow 02$ $063.02.045 \longrightarrow 82$	$005.32.074 \longrightarrow 00$ $065.32.029 \longrightarrow 88$	$005.00.125 \longrightarrow 89$	
061.02.500C → 30	061.21.901 <b>→</b> 36	062.13.050 → 41	063.04.010 → 91	065.33.014 → 88	065.66.250 → 89	
061.02.901 → 30	061.22.125 → 36	062.13.100 → 41	063.04.012 → 91	065.33.029 → 88	065.66.500 → 89	
$061.02.901C \longrightarrow 30$	$061.22.250 \longrightarrow 36$	$062.21.902 \rightarrow 40$	$063.04.014 \longrightarrow 91$	065.34.014 → 85	$065.66.901 \longrightarrow 89$	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{ccc} 063.04.019 \longrightarrow 91 \\ 063.04.024 \longrightarrow 91 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
$061.02.903 \longrightarrow 30$	$061.23.125 \longrightarrow 36$	$062.21.900 \longrightarrow 40$ $062.21.910 \longrightarrow 40$	$063.04.029 \longrightarrow 91$	$065.36.019 \longrightarrow 87$	$065.67.011 \longrightarrow 89$	
061.02.905 → 30	061.23.250 → 36	062.21.920 → 40	063.04.034 → 91	065.36.024 → 87	065.67.022 → 89	
061.02.910 → 30	061.23.500 → 36	062.21.930 → 40	063.04.045 → 91	065.36.029 → 87	065.70.001 → 90	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$061.23.901 \longrightarrow 36$	$062.27.905 \longrightarrow 40$	$063.05.001 \longrightarrow 98$	$065.37.014 \longrightarrow 84$	$065.71.001 \longrightarrow 90$	
$061.07.030 \longrightarrow 32$ $061.07.100 \longrightarrow 32$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccc} 063.14.014 \longrightarrow 91 \\ 063.14.019 \longrightarrow 91 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
$061.07.250 \longrightarrow 32$	$061.24.500 \longrightarrow 36$	$062.28.905 \longrightarrow 40$	$063.14.024 \longrightarrow 91$	$065.38.029 \longrightarrow 84$	$066.10.004 \longrightarrow 94$	
061.07.500 <b>→</b> 32	061.24.901 → 36	062.28.910 → 40	063.14.029 <b>→</b> 91	065.39.014 → 88	066.11.001 <del></del>	
$061.07.901 \longrightarrow 32$	$061.25.125 \longrightarrow 36$	062.28.920 → 40	063.14.034 → 91	065.39.029 → 88	066.11.002 → 94	
$\begin{array}{cccc} 061.07.902 \longrightarrow 32 \\ 061.08.050 \longrightarrow 32 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccc} 063.14.045 \longrightarrow 91 \\ 063.17.001 \longrightarrow 91 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
$061.08.100 \longrightarrow 32$	$061.25.901 \longrightarrow 36$	$062.36.920 \longrightarrow 43$	$063.17.007 \longrightarrow 91$	$005.40.029 \longrightarrow 80$ $065.41.014 \longrightarrow 85$	$066.11.005 \longrightarrow 94$	
$061.08.250 \longrightarrow 32$	$061.26.125 \longrightarrow 36$	$062.36.930 \longrightarrow 43$	$064.11.001 \rightarrow 82$	065.41.019 → 85	067.30.001 → 90	
061.08.500 → 32	061.26.250 → 36	062.39.900 <b>→</b> 43	064.11.002 → 82	065.41.024 → 85	069.03.005 →126	
$061.08.901 \longrightarrow 32$	061.26.500 → 36	$062.39.901 \longrightarrow 43$	064.11.003 → 82	065.41.029 → 85	069.03.175 →129	
$\begin{array}{ccc} 061.08.902 \longrightarrow 32 \\ 061.09.0B1 \longrightarrow 32 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$062.39.902 \longrightarrow 43$	$\begin{array}{cccc} 064.11.004 \longrightarrow 82 \\ 064.11.005 \longrightarrow 82 \end{array}$	065.42.001 → 84	$069.03.660 \rightarrow 128$ $069.04.001 \rightarrow 126$	
$061.09.0G1 \longrightarrow 32$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$064.11.005 \longrightarrow 82$ $064.11.006 \longrightarrow 82$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$069.04.007 \longrightarrow 126$ $069.04.002 \longrightarrow 126$	
$061.09.0R1 \longrightarrow 32$	$061.27.500 \longrightarrow 36$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$064.11.000 \longrightarrow 02$ $064.11.007 \longrightarrow 82$	$005.42.003 \longrightarrow 04$ $065.42.004 \longrightarrow 84$	$009.04.002 \longrightarrow 120$ $069.04.175 \longrightarrow 129$	
061.09.0Y1 → 32	061.27.901 <b>→</b> 36	062.39.910 → 43	064.11.008 → 82	065.43.001 → 84	069.04.660 →128	
061.09.125 → 35	061.28.125 → 36	062.39.913 → 43	064.11.009 → 82	065.43.002 → 84	069.05.001 →129	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{c} 061.28.250 \longrightarrow 36 \\ 061.28.500 \longrightarrow 36 \\ \end{array}$	$062.40.901 \rightarrow 123$	$064.11.010 \longrightarrow 82$	$065.43.003 \longrightarrow 84$	$\begin{array}{c} 069.05.175 \longrightarrow 129 \\ 069.05.660 \longrightarrow 128 \end{array}$	
$\begin{array}{cccc} 061.09.500 \longrightarrow 35\\ 061.09.901 \longrightarrow 35 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{r} 062.40.902 \longrightarrow 123 \\ 062.40.905 \longrightarrow 123 \end{array}$	$\begin{array}{ccc} 064.11.011 \longrightarrow 82 \\ 064.11.012 \longrightarrow 82 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$069.05.660 \rightarrow 128$ 071.01.002 $\rightarrow 118$	
$061.10.050 \longrightarrow 33$	$061.29.040 \longrightarrow 37$	$002.40.903 \longrightarrow 123$ $062.42.910 \longrightarrow 123$	$064.12.001 \longrightarrow 82$	$005.43.005 \longrightarrow 84$	$071.01.003 \longrightarrow 118$	
061.10.100 → 33	061.29.105 → 37	062.42.915 →123	064.12.002 → 82	065.44.001 → 84	071.01.004 →118	
061.10.250 → 33	061.29.370 → 37	062.42.920 →123	064.12.003 → 82	065.44.002 → 84	071.01.101 → 118	
061.10.500 <b>→</b> 33	061.29.720 → 37	062.50.500 → 39	064.12.004 → 82	065.44.003 → 84	071.01.102 →118	

# \_\_\_\_\_ product index

-											
catalogue no // p	bage	catalogue no //	page	catalogue no /	// page	catalogue no /	// page	catalogue no //	page	catalogue no //	page
071.02.001 —	▶116	076.02.001P -	→200	078.12.009 -	→181	080.01.006P -	→186	080.67.001 -	→122	094.01.001 -	→166
071.02.002 —		076.02.001R -		078.20.015W -		080.01.006R ·		080.76.001 -		094.01.002 -	
071.02.003 —		076.02.001W -		078.20.050W ·		080.01.007B ·		081.01.060 -		094.01.003 -	
071.02.004		076.02.002B -		079.01.001B -		080.01.007P		081.01.080 -		094.01.005 -	
071.02.005 — 071.02.006 —		076.02.002O - 076.02.002P -		079.01.001O - 079.01.001R -		080.01.007R - 080.01.101 -		081.01.100 - 081.01.120 -		094.01.006 - 094.01.007 -	
071.03.001		076.02.0027 -		079.01.001W -		080.04.001			$\rightarrow 202$	094.01.008 -	
071.05.001 —		076.02.002W -		079.01.002B -		080.04.002 -		081.02.061 -		094.01.009 -	
071.05.002 —		076.02.012B -		079.01.0020 -		080.05.001 -		081.02.091 -		094.02.001 -	
071.05.003		076.02.0120 -		079.01.002R -		080.05.002 -		081.02.092 -		094.02.002 -	
071.05.004 — 071.05.005 —		076.02.012P - 076.02.012R -		079.01.002W - 079.01.003B -		080.06.002B - 080.06.002P -		081.02.093 - 081.02.094 -	→202	094.02.003 - 094.02.004 -	
071.06.001		076.02.012R -		079.01.0030		080.06.002P		081.02.094 -		094.02.004 -	
071.06.002		076.02.101 -		079.01.003R ·		080.10.101 -		081.02.161 -		094.02.006 -	
071.07.003 —		076.05.001 -		079.01.003W -	<b>→</b> 46	080.10.201 -		081.02.191 -		094.02.007 -	
073.01.001 —		076.05.002 -		079.01.004B ·		080.11.001 •			→202	094.02.008 -	
073.03.001		076.05.003 -		079.01.0040		080.13.001 -		081.02.193 -		094.03.001 -	
073.05.001 — 073.06.001 —		076.05.004 - 077.01.000 -		079.01.004R - 079.01.004W -		080.15.001 - 080.15.002 -		081.02.194 - 081.02.221 -		094.03.002 - 094.03.003 -	
074.01.001		077.01.001 -		079.01.005B		080.15.003		081.04.060 -		094.03.005 -	
074.01.002 —		077.01.002 -		079.01.0050 -		080.15.004 -			→202	094.03.006 -	
074.01.003 —		077.01.003 -		079.01.005R -		080.16.001 -		081.10.001 -		094.03.007 -	→166
074.01.004 —		077.01.004 -		079.01.005W -		080.16.002 ·		081.13.060 -		094.03.008 -	
074.01.005 — 074.02.001 —		077.01.005 -		079.01.006B - 079.01.006O -		080.16.003 -			→203	094.03.009 -	
074.02.001		077.01.006 - 077.01.007 -		079.01.006R -		080.16.004 - 080.17.001 -		081.14.001 - 081.14.002 -		094.04.001 - 094.04.002 -	
074.03.002		077.01.008 -		079.01.006W -		080.17.002 -		081.20.001 -		094.04.003 -	
074.03.003 —		077.01.021 -	→ 44	079.01.101 -		080.18.001 -		082.01.001 -		094.04.004 -	
		077.01.031 -		079.01.102 -		080.18.002 -			→204	094.04.005 -	
074.03.005		077.02.001 -		079.01.103 -		080.21.007 -		082.01.003 -		094.04.006 -	
074.04.001 — 074.04.002 —		077.02.002 - 077.02.003 -		079.01.104 · 079.01.105 ·		080.21.008 - 080.21.009 -		082.02.001 - 082.02.003 -		094.04.007 - 094.04.008 -	
074.04.002		077.02.003 -		079.01.106 -		080.22.007		082.03.001 -		094.05.001 -	
074.04.004		077.02.005 -		079.02.001 -		080.22.008 -			→205	094.05.002 -	
074.04.005 —		077.02.006 -		079.02.002 -		080.22.009 -		083.13.001 -		094.05.003 -	
074.07.001 —		077.03.001 -		079.02.003 -		080.23.007 •		083.13.002 -		094.05.005 -	
074.07.002		077.03.002 -		079.03.001B - 079.03.001O -		080.23.008 -		083.13.005 - 083.13.010 -		094.05.006 - 094.05.007 -	
074.07.003 — 075.00.001 —		077.04.001 - 077.04.002 -		079.03.001C - 079.03.001R -		080.23.009 - 080.26.007 -		083.13.025 -		094.05.007 -	
075.00.002		077.04.003 -		079.03.001W -		080.26.009		083.13.050 -		094.05.009 -	
075.00.003 —		077.04.004 -		079.03.002B -		080.26.010 -		083.13.100 -		094.06.006 -	
075.00.004 —		077.04.005 -		079.03.0020 -		080.40.001 -		084.01.001 -		094.07.001 -	
075.00.005		077.04.006 -		079.03.002R -		080.40.002B -		084.01.002 -		094.07.002 -	
075.00.006 — 075.00.007 —		078.01.001 - 078.01.002 -		079.03.002W - 079.03.003B -		080.40.002G - 080.40.002P -		084.02.001 - 084.02.003 -	$\rightarrow$ 13 $\rightarrow$ 13	094.07.003 - 094.07.005 -	
075.01.001		078.02.001 -		079.03.0030		080.40.002F -		084.02.003 -		094.07.005 -	
075.01.002 -		078.02.002 -		079.03.003R -		080.40.003 -		084.05.001 -		094.07.007 -	
075.01.003 —		078.02.003 -		079.03.003W -		080.40.004 -		084.22.001 -		094.07.008 -	→166
075.01.004 —		078.02.004 -		079.03.004B -		080.40.007 -		084.22.003 -		094.07.009 -	
075.01.005		078.02.005 -		079.03.0040		080.40.010 -		087.02.001 -		094.08.006 -	
075.01.006 — 075.01.007 —		078.02.006 - 078.02.007 -		079.03.004R - 079.03.004W -		080.40.011 - 080.40.021 -		087.02.002 - 088.01.001 -		094.11.005 - 094.11.010 -	
075.02.005		078.02.008 -		079.03.005B		080.40.101		088.02.001 -		094.11.025 -	
075.02.006 —	<b>)</b> 199	078.02.009 -	→181	079.03.0050 -	<b>→</b> 47	080.40.102 -	<b>→</b> 127	088.02.002 -	→210	094.11.050 -	→168
075.02.007 —		078.03.001 -	→184	079.03.005R -		080.41.001 -		088.02.003 -		094.11.100 -	
075.02.008		078.03.002 -		079.03.005W -		080.41.002 -		088.03.001 -		094.11.250 -	
075.02.009 — 075.03.001 —		078.03.003 - 078.03.004 -		079.03.006B - 079.04.001 -		080.41.003 - 080.44.001 -		089.03.012B - 089.03.012P -		094.11.500 - 094.12.005 -	
075.03.007		078.03.021 -		079.04.007 - 079.08.015B -		080.44.007		089.03.012P -		094.12.005 -	
075.04.001		078.03.022 -		079.08.015L -		080.45.001		089.03.013 -		094.12.025 -	
075.05.001 —	▶199	078.03.023 -	→184	079.08.050B -		080.45.101 -	→136	091.11.102 -	→185	094.12.050 -	
075.05.002 —		078.03.024 -		079.08.050L -		080.50.001 -		091.11.105 -		094.12.100 -	
075.05.003		078.05.002 -		079.11.016 -		080.50.011 -		091.15.001 -		094.12.250 -	
075.05.004 — 076.01.001B —		078.05.005 - 078.05.022 -		080.01.001 - 080.01.002B -		080.51.003 - 080.51.004 -		091.15.002 - 091.15.003 -		094.12.500 - 094.13.005 -	
076.01.001G		078.05.025 -		080.01.002B -		080.51.004		091.15.004 -		094.13.010 -	
076.01.001R —		078.05.105 -		080.01.002R -		080.51.006 -		091.15.005 -		094.13.025 -	
076.01.001W	201	078.06.015B -	→181	080.01.003B -	<b>→</b> 187	080.53.001 -	<b>→</b> 134	092.01.001B -	→188	094.13.050 -	→168
076.01.001Y		078.06.050B -		080.01.003P -		080.53.021 -		092.01.001P -		094.13.100 -	
076.01.003 —		078.12.001 -		080.01.003R -		080.65.002 -		092.01.001R -		094.13.250 -	
076.02.000B — 076.02.000O —		078.12.002 - 078.12.003 -		080.01.004B - 080.01.004P -		080.65.003 - 080.65.004 -		092.22.101W - 092.22.102W -		094.13.500 - 094.21.005 -	
076.02.000P		078.12.003 -		080.01.004P - 080.01.004P -		080.66.001		092.35.003 -		094.21.010 -	
076.02.000R —		078.12.005 -		080.01.005B -		080.66.002 -		093.01.001G -		094.21.025 -	
076.02.000W	200	078.12.006 -	→181	080.01.005P -	<b>→</b> 186	080.66.003 -	<b>→</b> 135	093.01.001P -	→189	094.21.050 -	→168
076.02.001B		078.12.007 -		080.01.005R -		080.66.005 -		093.01.001R -		094.21.100 -	
076.02.0010 —	200	078.12.008 -	→180	080.01.006B -	→186	080.66.006 -	→135	093.01.002B -	→189	094.21.250 -	→168

catalogue no // page	catalogue no // page	catalogue no // page	catalogue no // page	catalogue no // page	catalogue no // page	
094.21.500 →168	095.02.001 →172	099.05.019 → 76	105.03.110 →108	605.01.104 →101	621.11.103 →161	
094.22.005 →168	095.02.002 →172	$099.05.025 \rightarrow 76$	105.03.125 →108	605.01.105 →101	621.11.250 →161	
094.22.010 →168	095.03.001 →173	$099.05.109 \longrightarrow 76$	105.11.110 →108	605.01.106 →101	622.01.001 →164	
094.22.025 →168	095.03.002 →173	099.05.113 → 76	105.11.125 →108	605.01.107 →101	622.02.001 →164	
094.22.050 →168	095.03.003 →173	099.06.024 → 77	105.12.110 →108	605.01.108 →101	622.03.001 →164	
094.22.100 →168	095.03.004 →173	099.06.033 <b>→</b> 77	105.12.125 →108	605.01.109 <b>→</b> 101	622.11.001 →109	
094.22.250 <b>→</b> 168	095.03.011 →174	099.06.038 <b>→</b> 77	105.13.110 <b>→</b> 108	605.01.110 <b>→</b> 101	622.12.001 <b>→</b> 109	
094.22.500 →168	095.03.012 →174	099.06.124 → 77	105.13.125 <b>→</b> 108	605.01.111 <b>→</b> 101	623.01.004 <b>→</b> 100	
094.31.005 →168	095.05.001 →172	099.06.133 → 77	106.01.110 →108	605.01.112 →101	623.01.008 →100	
094.31.010 →168	095.05.002 →172	099.07.033 → 77	106.01.125 →108	605.01.113 →101	623.02.004 →100	
094.31.020 →168	095.06.001 →172	$099.07.038 \longrightarrow 77$	106.02.110 → 108	605.01.114 →101	623.02.008 →100	
094.31.050 →168 094.31.100 →168	$\begin{array}{r} 095.06.002 \longrightarrow 172 \\ 095.06.003 \longrightarrow 172 \end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	106.02.125 →108 106.03.110 →108	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	623.11.110 →100 908.B01.1000 →147	
$094.31.250 \longrightarrow 168$	$095.00.003 \longrightarrow 172$ $095.95.001 \longrightarrow 175$	$099.11.002 \longrightarrow 74$ $099.11.003 \longrightarrow 74$	$106.03.125 \rightarrow 108$	$608.01.102 \longrightarrow 80$	$908.B02.1000 \longrightarrow 147$ $908.B02.1000 \longrightarrow 147$	
094.32.005 →168	$095.95.007 \longrightarrow 175$ $095.95.002 \longrightarrow 175$	$099.11.003 \longrightarrow 74$ $099.11.004 \longrightarrow 74$	$106.11.110 \rightarrow 108$	$608.11.100 \longrightarrow 163$	908.B03.1000 →147	
094.32.010 →168	096.00.001 →171	$099.12.001 \rightarrow 74$	106.11.125 →108	608.11.250 →163	908.B04.1000 →147	
094.32.020 →168	096.00.002 →171	$099.12.002 \rightarrow 74$	106.12.110 →108	608.11.500 →163	908.B05.1000 →147	
094.32.050 →168	096.01.001 →171	099.12.003 → 74	106.12.125 →108	608.11.901 <b>→</b> 163	908.B06.1000 →147	
094.32.100 →168	096.01.002 →171	099.12.004 <b>→</b> 74	106.13.110 →108	608.11.902 <b>→</b> 163	908.B07.1000 →147	
094.32.250 <b>→</b> 168	096.01.004 <b>→</b> 171	099.13.001 <b>→</b> 74	106.13.125 <b>→</b> 108	608.12.100 <b>→</b> 163	908.B08.1000 →147	
094.41.005 →169	096.02.001 →172	099.13.002 → 74	107.40.140 →108	608.12.250 <b>→</b> 163	908.B09.1000 →147	
094.41.010 →169	096.02.002 →172	099.13.003 → 74	107.58.158 →108	608.12.500 →163	908.B10.1000 →147	
094.41.025 →169	096.03.001 →173	$099.13.004 \longrightarrow 74$	108.01.001 →178	608.12.901 → 163	908.B11.1000 →147	
094.41.050 →169 094.41.100 →169	$\begin{array}{c} 096.05.001 \longrightarrow 173 \\ 096.05.003 \longrightarrow 172 \end{array}$	$099.14.001 \longrightarrow 74$	108.01.015 →178	$610.01.005 \longrightarrow 17$	$\begin{array}{ccc} \text{T-B-010} & \longrightarrow & 22\\ \text{T-B-011} & \longrightarrow & 22 \end{array}$	
$094.41.250 \longrightarrow 169$	$096.05.003 \longrightarrow 172$ $096.05.004 \longrightarrow 172$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{r} 108.01.016 \longrightarrow 178 \\ 108.02.001 \longrightarrow 178 \end{array}$	$\begin{array}{ccc} 610.01.006 \longrightarrow 17 \\ 613.01.001 \longrightarrow 156 \end{array}$	$\begin{array}{ccc} \text{I-B-011} & \longrightarrow & 22 \\ \text{T-B-1000} & \longrightarrow & 22 \end{array}$	
094.41.500 →169	$096.05.011 \longrightarrow 174$	$099.15.002 \longrightarrow 74$	$108.02.002 \longrightarrow 178$	$613.01.102 \rightarrow 156$	$TB-10000A \longrightarrow 22$	
094.41.901 →169	096.05.012 →174	$099.15.003 \longrightarrow 74$	120.11.025 →192	613.03.001 →157	$TB-10000A-S \longrightarrow 22$	
094.41.902 →169	097.01.011 →174	099.15.004 → 74	120.11.075 →192	613.05.001 →157	TB-10000B → 22	
094.41.905 <b>→</b> 169	097.01.020 →174	099.16.002 <b>→</b> 74	120.11.175 →192	613.06.001 <b>→</b> 156	TB-10000B-S → 22	
094.41.910 <b>→</b> 169	097.02.011 <b>→</b> 174	099.16.004 <del></del>	120.12.025 <b>→</b> 192	613.07.001 <b>→</b> 157	T-B-1250 → 22	
094.42.005 →169	097.02.020 →174	$099.17.001 \longrightarrow 74$	120.12.075 →192	613.21.001 →196	$T-B-200 \longrightarrow 22$	
094.42.010 →169	097.03.001 →173	$099.17.003 \longrightarrow 74$	120.12.175 →192	613.22.001 →197	$\begin{array}{ccc} T-B-300 & \longrightarrow & 22 \\ T-B-5000 & & \longrightarrow & 22 \\ T-B-5000 & & & 0 \end{array}$	
094.42.025 →169 094.42.050 →169	$097.03.002 \rightarrow 173$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{r} 120.13.035 \longrightarrow 193 \\ 120.13.060 \longrightarrow 193 \end{array}$	$\begin{array}{r} 613.31.001 \longrightarrow 196 \\ 613.41.001 \longrightarrow 197 \end{array}$	$\begin{array}{rcl} \text{TB-5000A} & \longrightarrow & 22\\ \text{TB-5000A-S} & \longrightarrow & 22 \end{array}$	
$094.42.000 \longrightarrow 169$ $094.42.100 \longrightarrow 169$	$\begin{array}{r} 097.04.001 \longrightarrow 173 \\ 097.04.002 \longrightarrow 173 \end{array}$	$099.18.002 \longrightarrow 74$ $099.18.003 \longrightarrow 74$	$120.13.090 \longrightarrow 193$	$615.01.001 \rightarrow 160$	$TB-5000A-S \longrightarrow 22$ $TB-5000B \longrightarrow 22$	
094.42.250 →169	$097.05.106 \rightarrow 171$	$099.18.004 \longrightarrow 74$	121.01.001 →206	615.01.012 →160	$TB-5000B-S \longrightarrow 22$	
094.42.500 →169	097.05.107 →171	099.19.001 → 74	121.11.023 →206	615.01.101 →160	TF-010 $\rightarrow$ 22	
094.42.901 →169	097.05.108 →171	099.19.003 → 74	121.12.030 →206	615.01.103 →160	TF-011 → 22	
094.42.902 <b>→</b> 169	097.05.109 <b>→</b> 171	099.50.001 <b>→</b> 76	122.11.006 →193	616.01.001 <b>→</b> 144	TF-100 $\rightarrow$ 22	
094.42.905 →169	097.05.110 →171	099.60.001 → 76	122.11.012 →193	616.01.101 →146	$TF-1000 \longrightarrow 22$	
094.42.910 →169	097.05.111 → 171	101.01.001 →148	122.11.024 →193	616.01.103 →146	$\begin{array}{ccc} TF-1250 & \longrightarrow & 22 \\ TF-000 & & & 0 \end{array}$	
094.51.005 →169	$\begin{array}{c} 098.01.001 \longrightarrow 176 \\ 098.01.002 \longrightarrow 176 \end{array}$	101.01.002 →148	$122.11.048 \longrightarrow 193$ $122.11.096 \longrightarrow 193$	$616.01.104 \longrightarrow 146$ $616.02.002 \longrightarrow 144$	$\begin{array}{ccc} \text{TF-200} & \longrightarrow & 22 \\ \text{TF-300} & \longrightarrow & 22 \end{array}$	
094.51.010 →169 094.51.025 →169	$098.01.002 \longrightarrow 176$ $098.01.003 \longrightarrow 176$	101.02.001 →148 101.02.002 →148	$122.11.196 \longrightarrow 193$	$616.02.101 \longrightarrow 146$	$\begin{array}{ccc} 1F-500 & \longrightarrow & 22\\ TF-50 & \longrightarrow & 22 \end{array}$	
$094.51.050 \rightarrow 169$	098.01.004 →176	101.02.003 →148	123.01.002 →190	$616.02.102 \rightarrow 146$	$TF-R-S-010 \longrightarrow 22$	
094.51.100 →169	098.01.005 →176	101.03.001 → 119	123.01.028 →190	616.11.001 →145	TF-R-S-011 → 22	
094.51.250 <b>→</b> 169	098.01.006 →176	101.03.003 <b>→</b> 149	123.01.096 <b>→</b> 191	616.11.101 <b>→</b> 146	TF-R-S-021 → 22	
094.51.500 →169	098.01.007 →177	101.03.004 →149	123.02.018 →190	616.11.102 <b>→</b> 146	TF-R-S-100 $\longrightarrow$ 22	
094.51.901 →169	098.01.008 →177	101.03.005 →149	123.02.028 →190	616.11.103 →146	$TF-R-S-1000 \longrightarrow 22$	
094.51.902 →169	098.01.009 →177	101.04.003 →148	123.02.096 →191	616.11.104 →146	$TF-R-S-1250 \longrightarrow 22$	
$094.51.905 \rightarrow 169$	$098.01.010 \longrightarrow 177$	101.13.003 →149	$123.03.028 \longrightarrow 190$	616.11.105 →146 616.11.107 →146	$TF-R-S-200 \longrightarrow 22$	
$094.51.910 \longrightarrow 169$ $094.52.005 \longrightarrow 169$	$\begin{array}{r} 098.01.011 \longrightarrow 177 \\ 098.01.012 \longrightarrow 177 \end{array}$	101.13.004 →149 101.13.005 →149	$\begin{array}{r} 124.01.001 \longrightarrow 191 \\ 502.04.500 \longrightarrow 147 \end{array}$	$616.11.107 \longrightarrow 146$ $616.11.108 \longrightarrow 146$	$\begin{array}{rcl} \text{TF-R-S-300} & \longrightarrow & 22 \\ \text{TF-R-S-50} & \longrightarrow & 22 \end{array}$	
$094.52.003 \longrightarrow 109$ $094.52.010 \longrightarrow 169$	$098.02.001 \longrightarrow 176$	$101.14.003 \longrightarrow 149$	$502.04.901 \longrightarrow 147$	$616.11.109 \longrightarrow 145$	$\begin{array}{ccc} & & & & & & & \\ \hline & & & & & & \\ \hline & & & &$	
$094.52.025 \rightarrow 169$	098.02.002 →176	$102.28.080 \rightarrow 95$	502.07.500 →147	616.12.001 →145	$T-R-011 \longrightarrow 22$	
094.52.050 →169	098.03.001B →177	102.30.080 → 95	502.07.901 →147	618.21.001 →195	T-R-1000 → 22	
094.52.100 <b>→</b> 169	098.03.001P →177	102.33.080 <b>→</b> 95	502.10.500 <b>→</b> 147	618.22.001 <b>→</b> 195	T-R-1250 → 22	
094.52.250 <b>→</b> 169	098.03.001R →177	102.33.094 <b>→</b> 95	502.10.901 <b>→</b> 147	618.23.001 <b>→</b> 195	T-R-200 → 22	
094.52.500 →169	098.03.002B →177	102.34.120 <b>→</b> 95	601.02.024 <b>→</b> 119	618.24.001 <b>→</b> 195	T-R-300 → 22	
094.52.901 →169	098.03.002P →177	104.01.001 →167	602.01.001 →162	618.25.001 →195	$T-R-S-010 \longrightarrow 22$	
094.52.902 →169	098.03.002R →177	104.01.002 →167	602.01.101 →162	618.32.001 →195	$\begin{array}{ccc} T-R-S-011 & \longrightarrow & 22 \\ T-R-S-0.1000 & \longrightarrow & 22 \\ $	
094.52.905 →169 094.52.910 →169	$\begin{array}{ccc} 099.01.001 \longrightarrow 73 \\ 099.01.002 \longrightarrow 73 \end{array}$	$\begin{array}{r} 104.01.003 \longrightarrow 167 \\ 104.01.004 \longrightarrow 167 \end{array}$	$\begin{array}{r} 602.02.001 \longrightarrow 162 \\ 602.31.001 \longrightarrow 150 \end{array}$	$\begin{array}{r} 618.41.001 \longrightarrow 195 \\ 621.01.101 \longrightarrow 121 \end{array}$	$\begin{array}{rcl} T-R-S-1000 & \longrightarrow & 22\\ T-R-S-1250 & \longrightarrow & 22 \end{array}$	
$094.91.002 \longrightarrow 109$	$099.01.002 \longrightarrow 73$ $099.01.003 \longrightarrow 73$	$104.01.005 \longrightarrow 167$	$602.31.002 \longrightarrow 150$	$621.05.001 \longrightarrow 120$	$\begin{array}{cccc} & & & & & & & \\ \hline & & & & & & \\ \hline & & & &$	
094.91.005 →166	$099.01.006 \longrightarrow 73$	104.01.006 →167	$602.31.003 \rightarrow 150$	$621.05.003 \longrightarrow 120$	$T-R-S-300 \longrightarrow 22$	
094.91.010 →166	$099.02.001 \rightarrow 75$	104.01.007 →167	602.31.006 →151	621.05.006 →120	///00000 / 22	
094.91.020 →166	099.02.002 → 75	104.01.008 →167	602.31.007 <b>→</b> 151	621.05.010 →120		
094.92.001 →169	099.02.011 <del></del> 75	104.01.009 <b>→</b> 167	602.32.001 <b>→</b> 151	621.05.015 <b>→</b> 120		
094.92.005 →169	099.03.050 → 75	104.01.010 →167	603.01.001 →112	621.05.022 →120		
094.92.010 →169	099.03.072 → 75	104.01.011 →167	603.02.001 → 113	621.05.028 →120		
094.92.020 →169	$099.03.090 \longrightarrow 75$	$104.01.012 \rightarrow 167$	$603.05.001 \rightarrow 114$	$621.06.003 \longrightarrow 121$		
094.92.050 →169 095.00.001 →171	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{r} 104.01.013 \longrightarrow 167 \\ 105.01.110 \longrightarrow 108 \end{array}$	$\begin{array}{r} 603.11.001 \longrightarrow 203 \\ 605.01.001 \longrightarrow 101 \end{array}$	$\begin{array}{r} 621.06.006 \longrightarrow 121 \\ 621.06.010 \longrightarrow 121 \end{array}$		
$095.00.007 \longrightarrow 171$ $095.00.002 \longrightarrow 171$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$105.01.125 \rightarrow 108$	$605.01.101 \longrightarrow 101$ $605.01.101 \longrightarrow 101$	$621.08.001 \longrightarrow 127$		
095.01.001 →171	$099.05.009 \longrightarrow 76$	105.02.110 →108	605.01.102 →101	621.11.001 →161		
095.01.002 →171	<i>099.05.013</i> → <i>76</i>	105.02.125 →108	605.01.103 <b>→</b> 101	621.11.050 <b>→</b> 161		



HO

HÒ



Am Dillhof 2 - 63863 Eschau - GERMANY Phone: +49 93 74 / 978 55 - 0 Fax: +49 93 74 / 978 55 - 85 info@isolab.de

www.isolab.de